COMPUTERS
and AUTOMATION

DATA PROCESSING • CYBERNETICS • ROBOTS

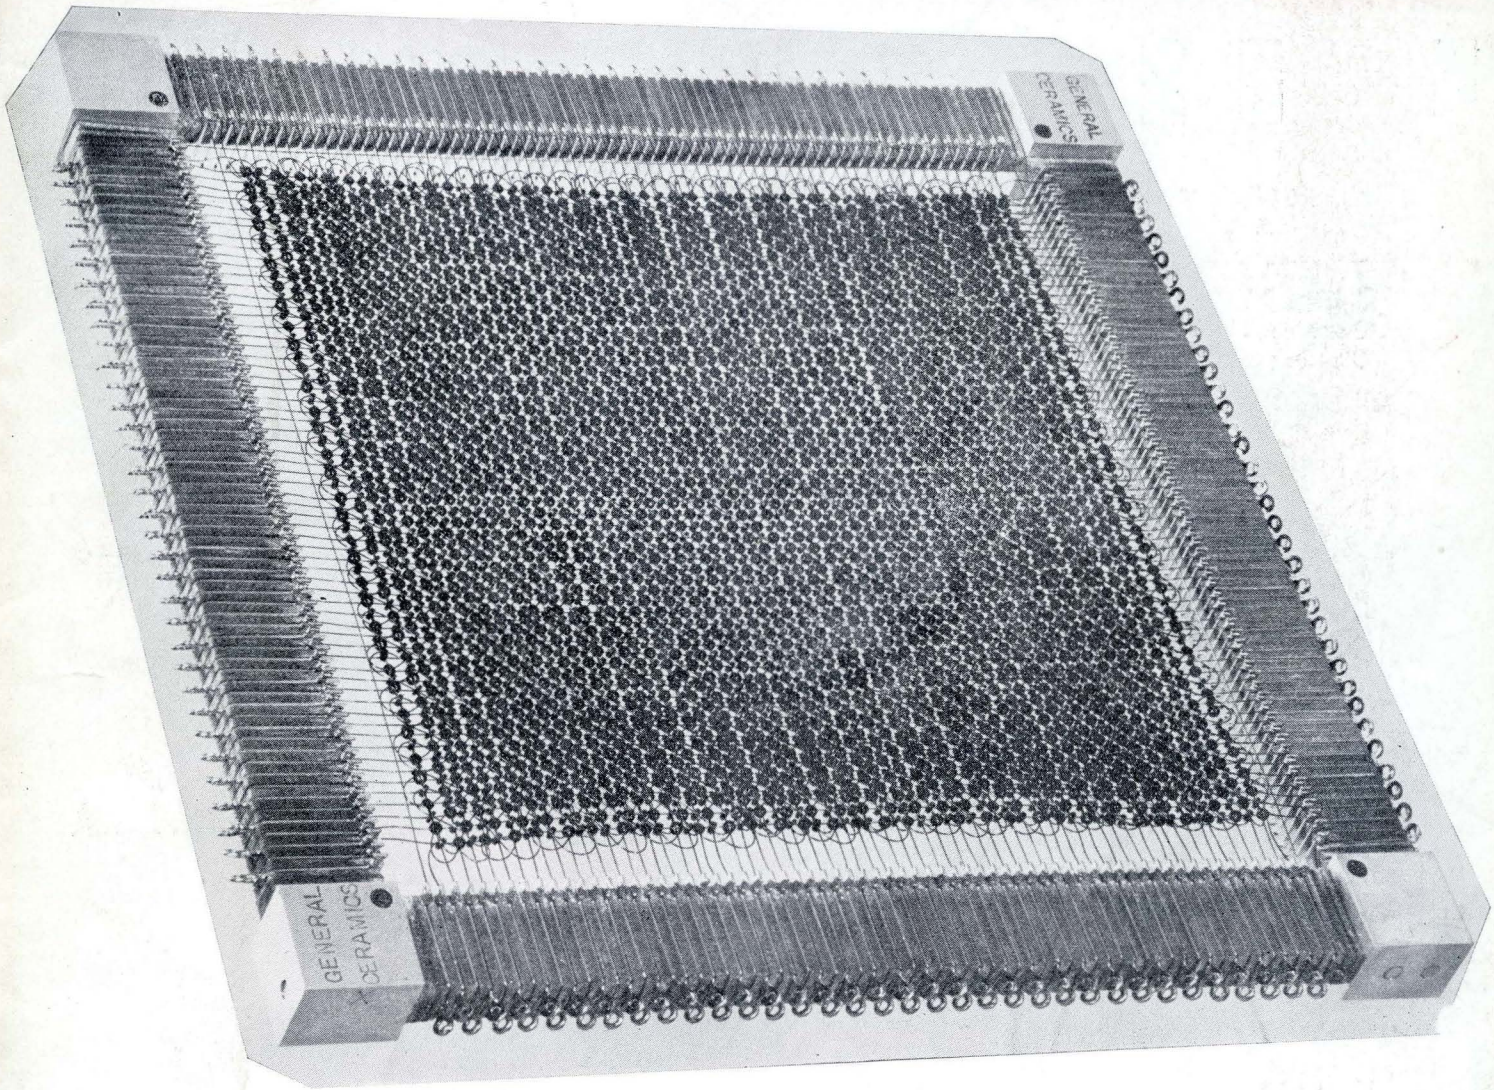

JANUARY
1958
•
VOL. 7 - NO. 1

Inertial Navigation

A PICTORIAL MANUAL ON COMPUTERS - Part 2

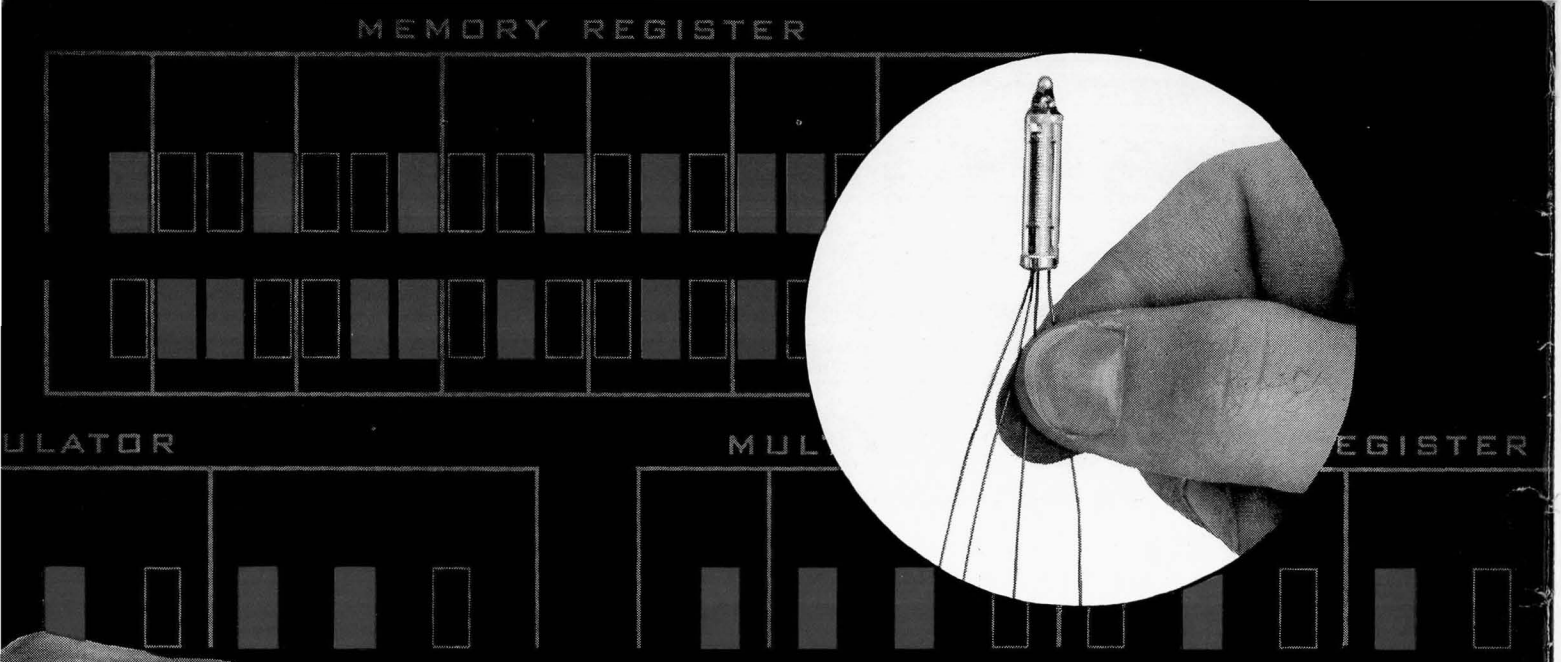

The tube that makes present computer indicator system designs obsolete...

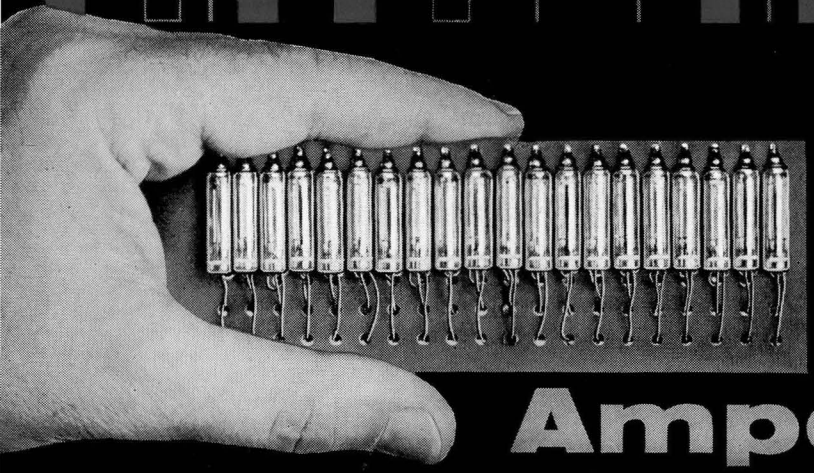

Amperex® 6977

subminiature indicator tube

Monitors Transistorized Circuits

- with higher information density
- with simpler associated circuitry
- without ionization- and deionization-time problems
- with increased circuit protection
- with lower power requirements
- with lower cost per unit
- with ultra-compact assembly on printed circuit boards

The AMPEREX 6977 is a high-vacuum filamentary subminiature indicator triode which gives a bright blue-green indication when the control grid is at zero potential. It has been developed specifically for transistorized computers, where its high input impedance and small signal requirements enable it to monitor the transistor circuits without loading them and affecting their operation. It replaces the conventional and much more expensive high-voltage transistor and neon lamp combination so far used in transistor computers for the same purpose. Since its high input impedance permits the use of a series grid resistor, it will not short out the transistor circuit if it should ever fail. Manufactured with special computer tube techniques, the 6977 is designed for 20,000 hours life.

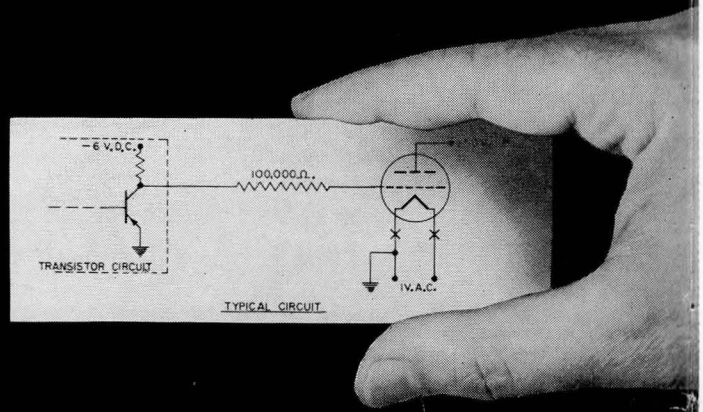

Heater voltage is only 1 volt, 30 ma, AC or DC. The anode will draw only 0.5 ma from a 50 volt DC supply during the zero-bias "on" condition. A 3.0 volt DC voltage is sufficient to cut-off plate current and light. Write for data sheet to Semiconductor and Special Purpose Tube Division, Amperex Electronic Corp., 230 Duffy Avenue, Hicksville, L.I., N.Y.

ask **Amperex**

about products and services for the computer industry

AMPEREX ELECTRONIC CORP., 230 DUFFY AVENUE, HICKSVILLE, LONG ISLAND, N. Y.
In Canada: Rogers Electronic Tubes & Components, 11-19 Brentcliffe Road, Leaside, Toronto 17.

At last! A large-capacity electronic computer you use right at your desk! ROYAL PRECISION LGP-30

High-speed computation at the lowest cost ever for a complete computer system

No more waiting in line for those answers you need! No more lost time in executing preliminary calculations or modifying equations! Not with the LGP-30! Wheeled right to your desk, operated from a regular wall outlet, LGP-30 allows you to follow your work personally from beginning to end . . . to change formulae on the spot . . . to simulate optimum designs without weeks of mathematical analysis. Thus you get faster answers . . . added time for *creative* work.

Easy to use. LGP-30 is a general-purpose stored-program computer — internally binary, serial, single address. Just the few orders in the command structure give complete internal programming. Controls are so simplified, you get an "overnight" feel for your computer.

Unusual memory capacity. With a magnetic drum memory of 4096 words, LGP-30 is the most powerful computer of its size yet developed. Fully automatic, it executes self-modifying programs.

Exceptional versatility and value. Both the scope of LGP-30's applications and the range of calculations it can perform are almost limitless. It gives speed and memory equal to computers many times its size and cost, yet initial investment is the smallest ever for a complete computer. Maintenance costs are extremely low . . . service facilities available coast-to-coast.

Outstanding features of LGP-30

• Alpha-numeric input-output via electric typewriter or punched paper tape. • Optional input-output equipment available. • Unusually large memory — 4096 words. • Library of sub-routines . . . programs for wide variety of applications. • Mobile . . . no expensive installation . . . self-cooled. • Nation-wide sales and service.

For further information and specifications, write Royal McBee Corporation, Data Processing Equipment Division, Port Chester, N. Y.

ROYAL McBEE

WORLD'S LARGEST MANUFACTURER OF TYPEWRITERS AND MAKER OF DATA PROCESSING EQUIPMENT

COMPUTERS

and AUTOMATION

DATA PROCESSING • CYBERNETICS • ROBOTS

Volume 7
Number 1

JANUARY 1958

Established
September 1951

A PICTORIAL MANUAL ON COMPUTERS, Part 2 . . 12

FRONT COVER
Magnetic Core Memory Plane 1, 29

ARTICLE
Inertial Navigation 6
E. F. VON ARX and KEN BRIGHAM

READERS' AND EDITOR'S FORUM
A Pictorial Manual on Computers, Part 2 . . . 9
Curse or Blessing? 9
Greeting to Computers (Solution) 10

INDUSTRY NEWS NOTES
Esso Cuba Refinery Uses Analog Computer Logger 29
Symposium: Thinking Machines of the Future . 29
IBM Growth 29

REFERENCE INFORMATION
Annual Index to "Computers and Automation," Part 2 19
New Patents 34
R. R. SKOLNICK

INDEX OF NOTICES
Advertising Index 31
Back Copies 4
Bulk Subscriptions 4
Manuscripts . . . . . .
See Oct. Issue, p. 25

Change of Address: If your address changes, please send us both your new address and your old address (as it appears on the magazine address sticker), and allow three weeks for the change to be made.

BULK SUBSCRIPTIONS

These rates apply to prepaid subscriptions to COMPUTERS and AUTOMATION coming in together direct to the publisher. For example, if 7 subscriptions come in together, the saving on each one-year subscription will be 24 percent, and on each two-year subscription will be 31 percent. The bulk subscription rates, and savings to subscribers depending on the number of simultaneous subscriptions received, follow:

BULK SUBSCRIPTION RATES
(*United States*)

Number of Simultaneous Subscriptions	Rate for Each Subscription, and Resulting Saving: One Year	Two Years
7 or more	$4.20, 24%	$7.25, 31%
4 to 6	4.60, 16	8.00, 24
3	5.00, 9	8.80, 16
2	5.25, 5	9.55, 9

For Canada, add 50 cents for each year; outside of the United States and Canada, add $1.00 for each year.

EDITOR: Edmund C. Berkeley ASSOCIATE EDITOR: Ed Burnett
ASSISTANT EDITOR: Neil D. Macdonald

SERVICE AND SALES DIRECTOR
M. L. Kaye, 535 Fifth Ave., New York 17, N. Y..Murray Hill 2-4194

CONTRIBUTING EDITORS
Andrew D. Booth Ned Chapin John W. Carr, III
Alston S. Householder

ADVISORY COMMITTEE
Samuel B. Williams Herbert F. Mitchell, Jr. Howard T. Engstrom
Alston S. Householder H. Jefferson Mills, Jr. George E. Forsythe

ADVERTISING REPRESENTATIVES
New York 17: M. L. Kaye, 535 Fifth Ave.....Murray Hill 2-4194
San Francisco 5: W. A. Babcock, 605 Market St.....Yukon 2-3954
Los Angeles 5: W. F. Green, 439 S. Western Ave...Dunkirk 7-8135
Elsewhere: The Publisher, Berkeley Enterprises, Inc., 815 Washington St., Newtonville 60, Mass.....Decatur 2-5453 or 2-3928

COMPUTERS and AUTOMATION is published monthly at 160 Warren St., Roxbury 19, Mass., by Berkeley Enterprises, Inc. Printed in U.S.A.

SUBSCRIPTION RATES: (United States) $5.50 for 1 year, $10.50 for 2 years; (Canada) $6.00 for 1 year, $11.50 for 2 years; (Foreign) $6.50 for 1 year, $12.50 for 2 years.

Address all Editorial and Subscription Mail to Berkeley Enterprises, Inc., 815 Washington St., Newtonville 60, Mass.

ENTERED AS SECOND CLASS MATTER at the Post Office at Boston 19, Mass. Postmaster: Please send all Forms 3579 to Berkeley Enterprises, Inc., 160 Warren St., Roxbury 19, Mass.

Copyright, 1957, by Berkeley Enterprises, Inc.

Basic Source Information available to you from

COMPUTERS *and* AUTOMATION

PEOPLE:
Mailing plates for over 18,500 computer people; includes additions and corrections up to December, 1957. We address your envelopes. $19.00 per M

ORGANIZATIONS:
The Computer Directory and Buyers' Guide, 1957 (the June, 1957, issue of COMPUTERS and AUTOMATION): 790 organization listings, 1370 product and service listings. $6.00

GLOSSARY OF TERMS:
Over 480 careful, clear, understandable definitions. 4th cumulative edition, as of October, 1956. (20 or more copies, 10% discount.) $1.00

BACK COPIES:
(For six years of publication.)
If available, $1.25 each, except Directory issues June 1955, 1956, $4.00 each; June, 1957, $6.00.

Send prepaid orders or requests for more information to:

COMPUTERS and AUTOMATION
815 Washington Street Newtonville 60, Mass.

If not satisfactory, returnable in seven days for full refund.

when you have

ken ✻

you can!

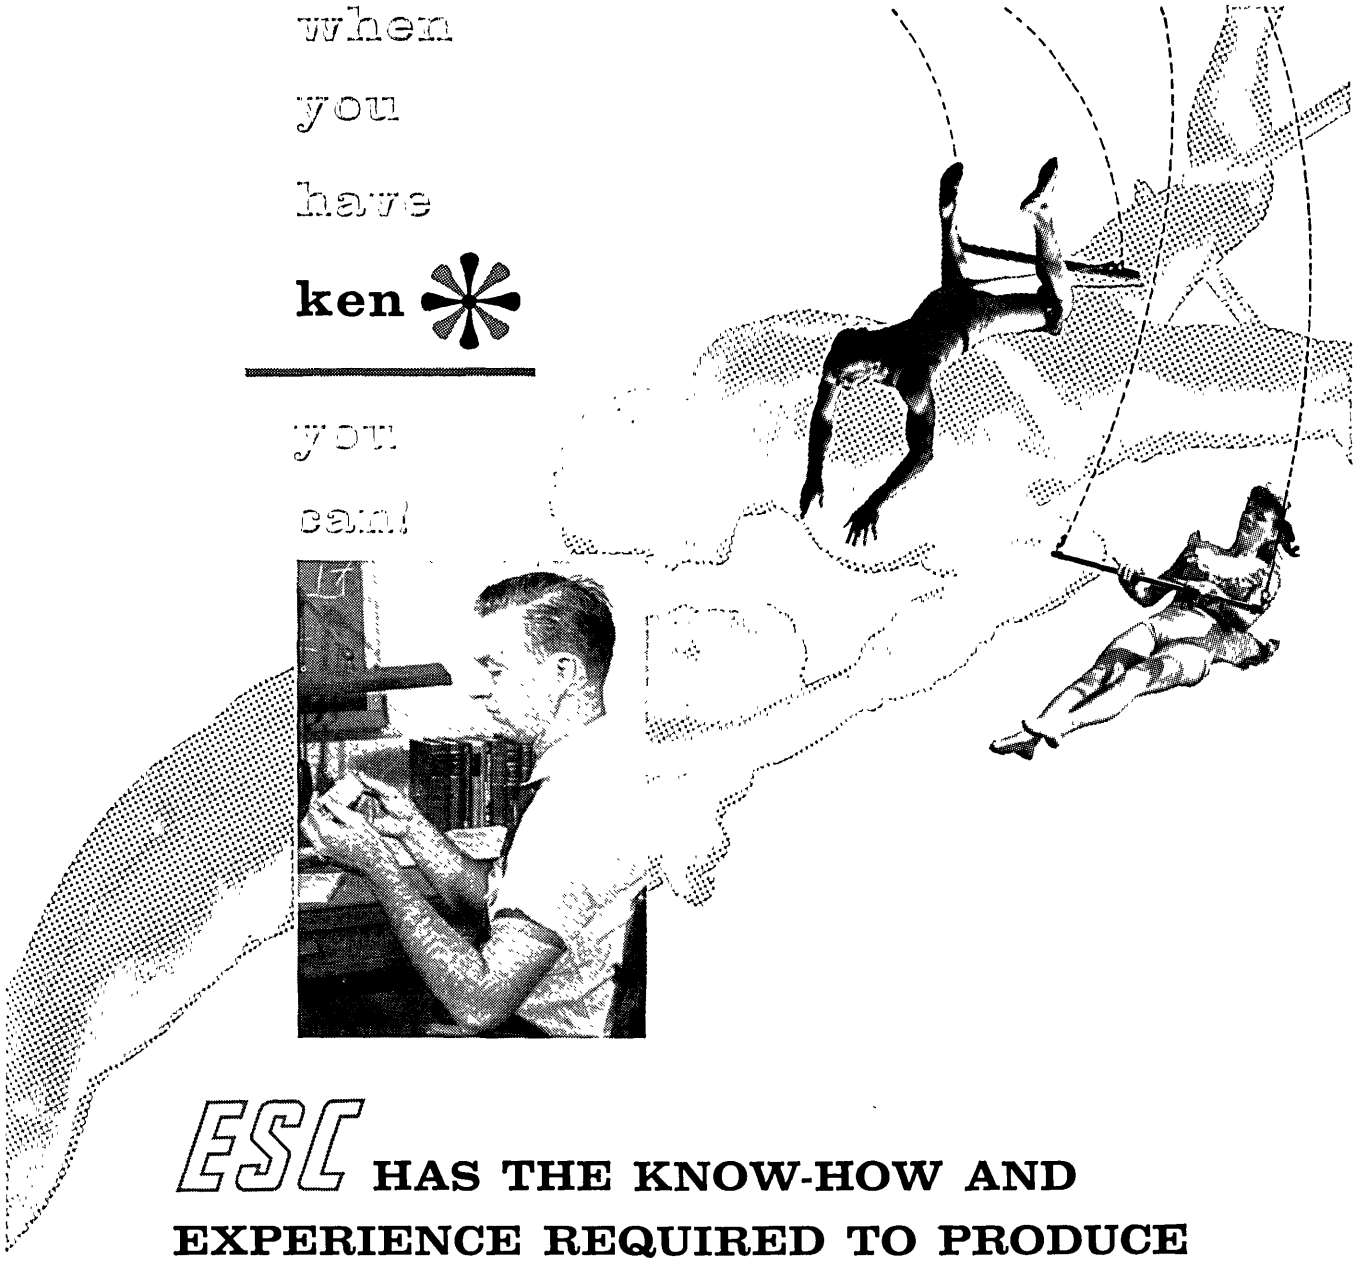

ESC HAS THE KNOW-HOW AND EXPERIENCE REQUIRED TO PRODUCE CUSTOM-BUILT DELAY LINES TO YOUR EXACTING SPECIFICATIONS.

1st in sales!

1st company devoted *exclusively* to the manufacture of delay lines!

1st in research, design and development of custom-built delay lines!

1st to submit the most definitive laboratory reports with all custom-built delay line prototypes!

✻ **ken**—vision, knowledge, perception... as, ESC has the ken to produce the finest custom-built delay lines in use today.

Exceptional employment opportunities for engineers experienced in pulse techniques.

ESC® CORPORATION

534 Bergen Boulevard, Palisades Park, New Jersey

INERTIAL NAVIGATION

E. F. von Arx and Ken Brigham

Sperry Gyroscope Co., Division of Sperry Rand
Great Neck, New York

I. By E. F. von Arx

SOME MONTHS AGO, Sperry Gyroscope Company revealed that it was actually manufacturing new extremely accurate components for navigation using inertial principles in long range missiles, atomic ships, atomic submarines, and supersonic aircraft of both manned and pilotless types. In a voluntary move, anticipating military needs, the company had completely redesigned extensive plant areas and methods — and created new supersensitive test devices — to assure accuracy of inertial "platforms," flight controls and automatic weapons.

Fabrication of extreme-precision "floated" gyroscopes on a production basis, with required accuracy and ruggedness, required several years' planning and effort to bring about this major manufacturing change.

Engineers working in the field of inertial navigation are coming very close to producing the proverbial "black box." Completely self-contained inertial navigators are being built and applied to manned aircraft and to missiles. With those devices, it is no longer necessary to observe the stars or to transmit or receive electromagnetic energy in order to know the latitude and longitude of a vehicle traveling over the earth. These advances have been made possible by combining a long-known physical principle, some new component developments, and the application of feedback control techniques.

Schuler Pendulum

The fundamental physical principle involved is one which was first suggested by Dr. M. Schuler, a German professor of applied mechanics. He pointed out that the point of suspension of a pendulum whose length was equal to the radius of the earth could be moved about without disturbing the pendulum bob. At first thought, this would seem to be an interesting but impractical piece of information since no such physical device is possible. However, it is the key to inertial navigation.

A system consisting of gyros and accelerometers mounted in a gimbal configuration with appropriate feedbacks can be made to represent such a pendulum practically. In such a system, a platform is then established which maintains itself perpendicular to the local vertical and is not disturbed by motion of the carrying vehicle. An accelerometer mounted on such a platform can accumulate the basic data which will yield a continuous indication of present position.

Precise Components

It is very important that the elements which form such a system be very precise, since even small component errors will result in large system errors after a reasonable period of time. Therefore, the key to a successful inertial navigator is the component accuracy. In general, the minimum accuracy requirements are pressing on the state of the art for analog computation and therefore it seems that future systems will employ digital techniques. All component accuracies are important, but the most critical ones are: (1) Gyroscopes; (2) Accelerometers; (3) Integrators; and (4) Resolvers.

The most important characteristic required of gyroscopes for inertial navigation is low drift rate and high torquer linearity. The most widely used technique to accomplish low drift rates is one wherein the gyroscope wheel assembly is hermetically sealed and the container is floated. The electromechanical design of the torquer is also receiving considerable attention. Random drift rates of small fractions of a degree per hour are being obtained.

An accelerometer must be very linear and be able to detect minute acceleration differences. Many new designs have and are being developed, some of which give pure acceleration outputs, velocity outputs, or displacement outputs. The design principles vary, but the most widely used are pendulum and gyroscopic principles. Linearity of a small fraction of a percent is being obtained and accelerations equivalent to a tilt of seconds of arc from the horizontal are practical.

Computation

Depending on the accelerometer used, one or more integrations may be required in the inertial navigator. The most widely used technique is a velocity servomechanism which depends for its accuracy on the tachometer that is used. Again, accuracy of a fraction of a per cent is required and is being obtained.

The basic information obtained in these systems must often be transferred from one coordinate system to another; these are plane triangle problems. Furthermore, navigation over the earth leads to spherical triangle problems. Both of these require resolvers for their solution. Many new developments in precision resolvers are required, and again accuracy of a fraction of a per cent has been achieved.

The system as a whole is a problem in feedback control design. The servomechanism techniques widely studied and brought to use during and since the last war have made possible the reduction to practice of Schuler's physical principle, using the newly developed components for which this theory helped define the need. While the systems in actual use do not measure up to the eventual needs of the ultimate inertial navigator, the problem has been defined, industry is at work, and the goal is within reach.

II. By Ken Brigham

Many of the future systems for automatic navigation on inertial principles rely on a basic "gyro platform" or "stable table," which serves as a fixed space reference, enabling other sensors and computors to provide automatic directional control over any course desired, to an exact destination anywhere on the earth.

Men at Sperry Gyroscope producing inertial navigation devices under dust-free conditions.

The key elements of the stable platform for long-range accuracy are special types and sizes of extreme-precision "floated" gyros — originally developed for all U.S. military services by the Instrumentation Laboratory at Massachusetts Institute of Technology, under the direction of Dr. Charles S. Draper.

Operating principles of some platform systems employing MIT floated gyros, for long range missiles, ships and aircraft, are well known to military scientists. But fabrication of these high-precision gyros on a production basis, with needed accuracy and ruggedness, required several years' planning and effort.

Dust-Free Manufacturing

Today, in glass-enclosed areas of certain Sperry Gyroscope Co. plants, workers measure with a 3-ton instrument mounted on seismic blocks below the ground, friction forces so infinitesimal that the weight of a gnat would spin the dial beyond its working scale.

In sealed rooms, as antiseptic as surgery in hospitals, carefully chosen workers are clad from head to toe in special nylon gowns, caps and boots. These uniforms prevent microscopic dust, lint from clothing, etc., from reaching ultra-sensitive elements of the gyros and "accelerometers" which these workers put together under 45-power microscopes. Even an invisible speck of dandruff on a critical bearing might cause an error of several miles at the end of a 5,000-mile inertially-guided voyage or flight.

No paper is allowed in these rooms — even blueprints are transferred to plastic sheets before admittance. No visitors are allowed inside, except in dust-proof costume. The only entrance is through an air-lock chamber, where each person is blown dust-free by a powerful air-blast before and after donning the required uniform. Smoking, or face powder, are equally tabu, as abrasive sources of microscopic error.

Critical portions of these purposely-dispersed inertial plant areas are scientifically controlled for temperature and humidity. Air is filtered to an exceptional degree — removing all dust particles larger than 0.3 micron, or 12 one-millionths of an inch. This screens out many bacterial organisms, even perceptible traces of volcanic ash and meteorite dust which the trade winds and jet streams carry to settle throughout the earth.

New Inertial Devices

With marine, air and surface armament craftsmen already trained to operate such ultra-precision devices, other new inertial devices are being produced — including entirely new types of rugged, high-accuracy accelerometers, another recent Sperry development. These minature, ultra-sensitive devices are proving capable of covering the entire range of "g-loads" presently planned for aircraft and rockets. They may thus become primary devices for sensing motion on the flight path of various guided missiles.

[Please turn to page 10]

How to speed up a digital computer

New Ampex Digital Tape System quickens input and output

Ampex's new digital tape equipment is to computers as a super-super highway would be to 1958's new 300 horsepower automobiles. Computer arithmetic can move at electron speeds — but previous input/output rates have been like bumper-to-bumper traffic. Now the jam is broken.

60,000 six-bit characters per second is one of several transfer rates available on the new Ampex Digital Tape System. Depending on how you can accept the data, some Ampex rates are even faster, others are somewhat slower.

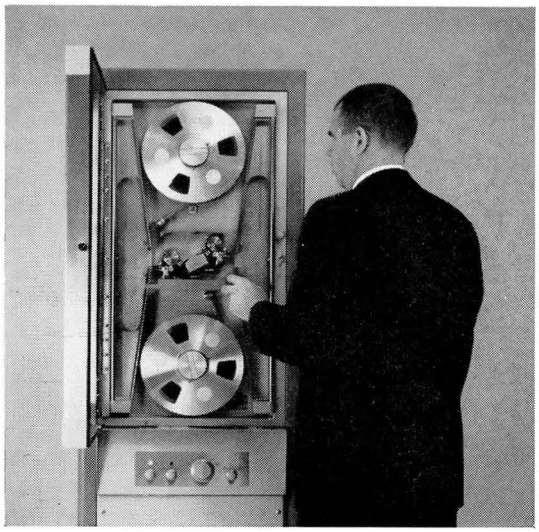

FR-300 Digital Tape Handler

To achieve a livelier pace . . . a SYSTEM of new equipment

In a complete digital computer, the Ampex equipment provides two neatly packaged functions: input source and output receiver. By treating these as systems unto themselves, Ampex achieves optimum performance and reliability. In them, four interdependent items have been matched: tape handler, heads, amplifiers and magnetic tape. For the total result, the four are inseparable.

The Ampex FR-300 tape handler operates at 150 inches per second. With this new speed plus other format improvements contributed by the other Ampex components, transfer rates can be increased up to six fold over previous standards. Search times too can be reduced to one sixth.

The FR-300 starts or stops in 1.5 milliseconds. These times can be depended upon indefinitely. Hence they drastically reduce the buffer storage requirements of the computer system. Also, inter-record distances are accurate and are shortened by half.



Complete Electronic Assembly

Despite its race-horse gait, the FR-300 is a workhorse machine thoroughly tested and perfected in a year-long component shakedown. Its dependability and low maintenance requirements are aimed at increasing the computer's available working hours per day.

Two other Ampex tape handlers, the FR-400 and FR-200A operate at lower speeds, serving smaller computers and auxiliary digital equipment such as converters, printers, etc.

Read/write heads and amplifiers work together to achieve higher bit-packing densities. On the Ampex system, the 200-bit-per-second standard is conservative. Ampex's new heads can resolve pulses much closer than this. And the amplifiers easily handle the tremendous transfer rates achieved when closer bit packing and high tape speeds are combined. All-transistor design of the amplifiers achieves extreme reliability and compactness.

Ampex computer tape, a new specially formulated type, plays a key part in system reliability. To reduce *significant* dropouts and spurious noise to zero, the tape is manufactured in a completely air-conditioned plant. Employees wear lintless "surgical" clothing. And each reel is individually tested and packaged within two hermetically sealed wraps.

A tough new oxide binder on Ampex Computer Tape withstands many times the use of any previous "long wear" tapes. Virtually no oxide rubs off; heads need much less frequent cleaning. Precision reels, available as an option, protect the tape edges from damage and improve tape handling and guidance.

A newly published brochure is available describing all components of the Ampex Digital Tape System and explaining performance specifications. May we send you a copy?

INSTRUMENTATION DIVISION
AMPEX CORPORATION
FIRST IN MAGNETIC TAPE INSTRUMENTATION
934 CHARTER STREET · REDWOOD CITY, CALIFORNIA

District offices serving all areas of the United States and Canada; Foreign Representatives in countries around the world.

MAGNETIC TAPE APPLICATIONS BY AMPEX

11

ONE OF A SERIES



Series FR-100



Model FR-400 Digital



Model FR-200A Digital



Series 800 Mobile and Airborne



Series FL-100 Loop Recorders

Model MR-100 Missile Recorder

Readers' and Editor's Forum

A PICTORIAL MANUAL ON COMPUTERS, Part 2

In this issue we complete for the time being our report on the theme "Computers and Data Processing Presented in Pictures," of which Part 1 was published in the December issue. For the basis of selection of pictures and other comments, please see the December 1957 issue, page 7. Again, we should like to express our thanks to the organizations who kindly sent us pictures.

We hope to publish again a Pictorial Manual on computers in the December 1958 issue. In the meantime, if any reader has pictures of computers or components or allied equipment, pictures that explain or illustrate how something works or operates, pictures that do not have solely featureless concealing covers, we shall be eager to see them, and we hope we may be able to publish them, in the magazine or on our front cover. Some of the fine pictures that we found no room for in our report will also be published in early issues, in the magazine or on our front cover.

CURSE OR BLESSING?

I. From Mrs. P. Cammer, Huntington, N.Y.

I have no interest in computers and automation except insofar as they can better the human lot. It is my opinion that apart from noted achievements to that end, they are on the whole more of a curse to humanity than they are a blessing. I think it is an outrage to civilization for great minds — for all minds — to work on devices for A-bombs, H-bombs, and the tribe of idiot missiles and other weapons that are the foundation of modern economics.

II. Clipping she enclosed from the *New York Journal American,* Nov. 17, 1957:

Washington: — Administration will attempt to shave $600,000,000 from agriculture program funds for use in beefed-up missile development operations.

III. From *The Manchester Guardian,* Dec. 12, 1957

. . . when the fate of the first Vanguard rocket is considered, . . . no amount of preliminary testing can ensure that everything will work properly. . . . So it will be well if the Americans put off hunting for scapegoats until at least one other attempt at firing has been made. Unfortunately, however, the Vanguard rocket is not the only American rocket to have gone wrong. One I.C.B.M. after another has ended up in the sea or in flames on its launching platform. This sequence of events — but not the failure of a single Vanguard — suggests that there is something wrong with American engineering. In the ordinary run of American industry . . . it is acknowledged that the strength of the United States lies in the quality of its production engineering. It seems that the development of rockets — and atomic power too — is not attended by the same genius. . . . There is some evidence that the "crash programmes" of which the Americans are fond lead to a proliferation of complexities in engineering designs. . . .

It will be a pity if Americans conclude that a great deal more has blown up besides the rocket that was to have made of the United States satellite a fellow traveler with the original sputniks. Most of them already think that the sputniks' appearance (to say nothing of the Soviet intercontinental missile) has lost them "face." It would be unwise for them to plunge deeper into the sort of mood that regards all scientific endeavor as a race to be won or lost against a potential enemy. . . .

IV. From the Editor

Are computers and automation a curse or a blessing?

Are hydrogen bombs, atomic bombs, intercontinental ballistic missiles, and the rest of the tribe (with their computing brains), a curse or a blessing?

Is it desirable to shave $600,000,000 off the agriculture funds for a "crash programme" of missile development?

Is there something wrong with American engineering?

Have Americans lost "face" from the sputniks' appearance?

Are Americans going into a mood that regards all scientific endeavor as a race to be won or lost against a potential enemy?

What is the social responsibility of scientists for the scientific developments which they produce?

What should a magazine do about arguing these subjects, accepting a social responsibility about them, taking an editorial stand on them?

Hundreds of magazines in this country take the stand that they completely agree with the current underlying policies and assumptions of the U.S. Government except for minor details; or they completely omit discussion of "controversial" subjects, and concentrate on technical questions. Far be it from them to think in print about the human implications of hydrogen bombs guided by astute navigation devices making both the United States and Russia "deader than dead."

At least three magazines in the United States have accepted the concept of responsibility for the social effects of scientific, professional, or literary work. These magazines are *The New Yorker,* the *Saturday Review,* and the *Bulletin of the Atomic Scientists.* They stand out because they discuss controversial subjects; they publish unpopular views as well as popular ones. For example, there was a cartoon in *The New Yorker* recently, which as I remember showed a smiling middle-aged lady in an exhibition, standing in front of a U.S. State Department exhibit booth and inquiring cheerily, "Which are the dictator countries we are friends with?"

You who are reading this are a reader of COMPUTERS AND AUTOMATION. You have a vote. What do you

think about these burning questions? Would you write and tell us? or would you send us just a postcard with one word on it — either YES, let's discuss and argue the social responsibility of computer scientists; or NO, let's stick to the technical side, and leave the controversial subject of the social effects of computing devices to other people.

GREETING TO COMPUTERS (Solution)

In our December issue we published the following greeting:

For Christmas, we wish our subscribers, our readers, and all computer people:

```
          A                      YEAR
+       VERY             + AHEAD
+ HAPPY                  = MOPDR
= PLEDP
                                 ID = YO
```

and 5741 2641 1280 320 52. (Solve for the digits; each letter stands for just one digit 0 to 9, although one digit may be represented by more than one letter.)

Solution: Change O to D. R plus D and no carry ends in R. Therefore D is zero. Twice A and no carry ends in D(zero). Therefore A is 5. A(5) plus one carried is M. Therefore M is 6. E plus P plus one carried ends in E. Therefore P is 9. Twice E plus one carried ends in P(9); therefore E is 4 or 9, but cannot be 9 since P is 9, and therefore is 4. H plus one carried is P(9); so H is 8. Y plus H(8) ends in D(zero); so Y is 2. R plus P(9) plus no carry ends in D(zero); so R is 1. Only 3 and 7 are unidentified; V plus A(5) ends in L; try V 3 and L 7; incorrect; therefore V is 7 and L is 3. Substituting in the numerical message we have:

AVER (Y,I)MER R(Y,I)H(D,O) L(Y,I)(D,O) AY

and this clearly is A VERY MERRY HOLIDAY.

Inertial Navigation

[Continued from page 7]

Requirements to Be Met

The elaborate nature of the factory preparations to produce new inertial components, may be understood better in the light of the near-fantastic performance requirements. These "stable platforms" are expected to detect and automatically control angular deflections so small as to make the fabled Western sharpshooter's trick of hitting a silver dollar in mid-air seem like shooting fish in a barrel. Long-range missile guidance demands exact measurement of angles no larger than a dime over a mile away. To do this, sensing devices must be capable of detecting even finer movements — equivalent to the size of a football 100 miles away — or the area of a modern football stadium at the surface of the moon.

To maintain such accuracies through the extreme range of temperatures and shock of rocket vehicles, or through the long sea voyages of atomic ships and submarines, requires that the almost-perfect balance of critical sensing elements be maintained by a "dimensional stability," that is, held within a very small fraction of one wavelength of light.

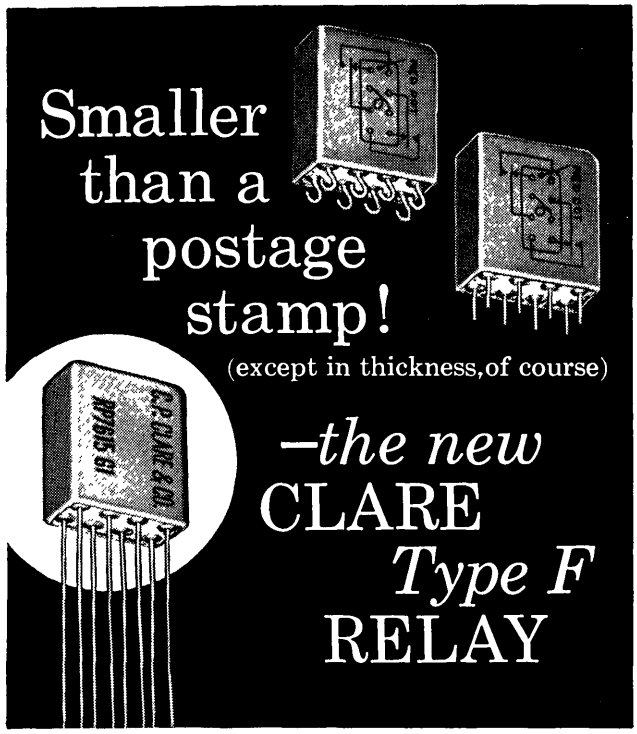

This new hermetically sealed relay is Clare's response to the demand for a smaller, lighter relay stalwart enough to withstand extremes of temperature, severe shock and vibration, yet fast and more than moderately sensitive. Important to many engineers is that the contacts—rated at 3 amperes—are proven also for low-level circuit applications. Designers of printed-circuit layouts will note that the terminal arrangement is nicely suited to 1/10-inch grid spacing.

SPECIFICATIONS

Ambient Temperature	—65° C to +125° C.
Shock	50 Gs for 11 milliseconds.
Vibration	5-75 cps at maximum excursion of ⅛-inch, 75-2000 cps at 20 Gs acceleration.
Dielectric Strength	Sea level—1000 volts rms between terminals and frame, and between adjacent circuits; 750 volts rms between contacts of a set. At 80,000 ft., 350 volts rms.
Insulation Resistance	1000 megohms minimum at 125° C.
Coils	Coils up to 10,000 ohms available for a wide range of voltages or currents.
Nominal Operating Power	250 milliwatts.
Pickup Time	3.5 milliseconds nominal.
Dropout Time	1.5 milliseconds nominal.
Contact Arrangement	2 pdt (2 form C).
Contact Rating	3 amps resistive at 28 volts d-c or 115 volts a-c; also for low-level applications.
Contact Resistance	0.050 ohm maximum.
Contact Life	500,000 operations minimum at 2 amps; 100,000 operations minimum at 3 amps.
Enclosure	Hermetically sealed, filled with dry nitrogen at 1 atmosphere pressure.
Mounting	All popular mounting arrangements available.
Terminals	Printed circuit; solder; plug-in (matching socket available). Variations of printed-circuit terminal length on 1/10-inch grid spacing available.
Weight	17 grams.
Military Specifications	MIL-R-25018; MIL-R-5757C, except as to contact overload.

For complete information send for Bulletin 124. Write or call: C. P. Clare & Co., 3101 Pratt Blvd., Chicago 45, Illinois. In Canada: C. P. Clare Canada Ltd., 2700 Jane Street, Toronto 15. Cable Address: CLARELAY.

CLARE RELAYS

FIRST in the industrial field

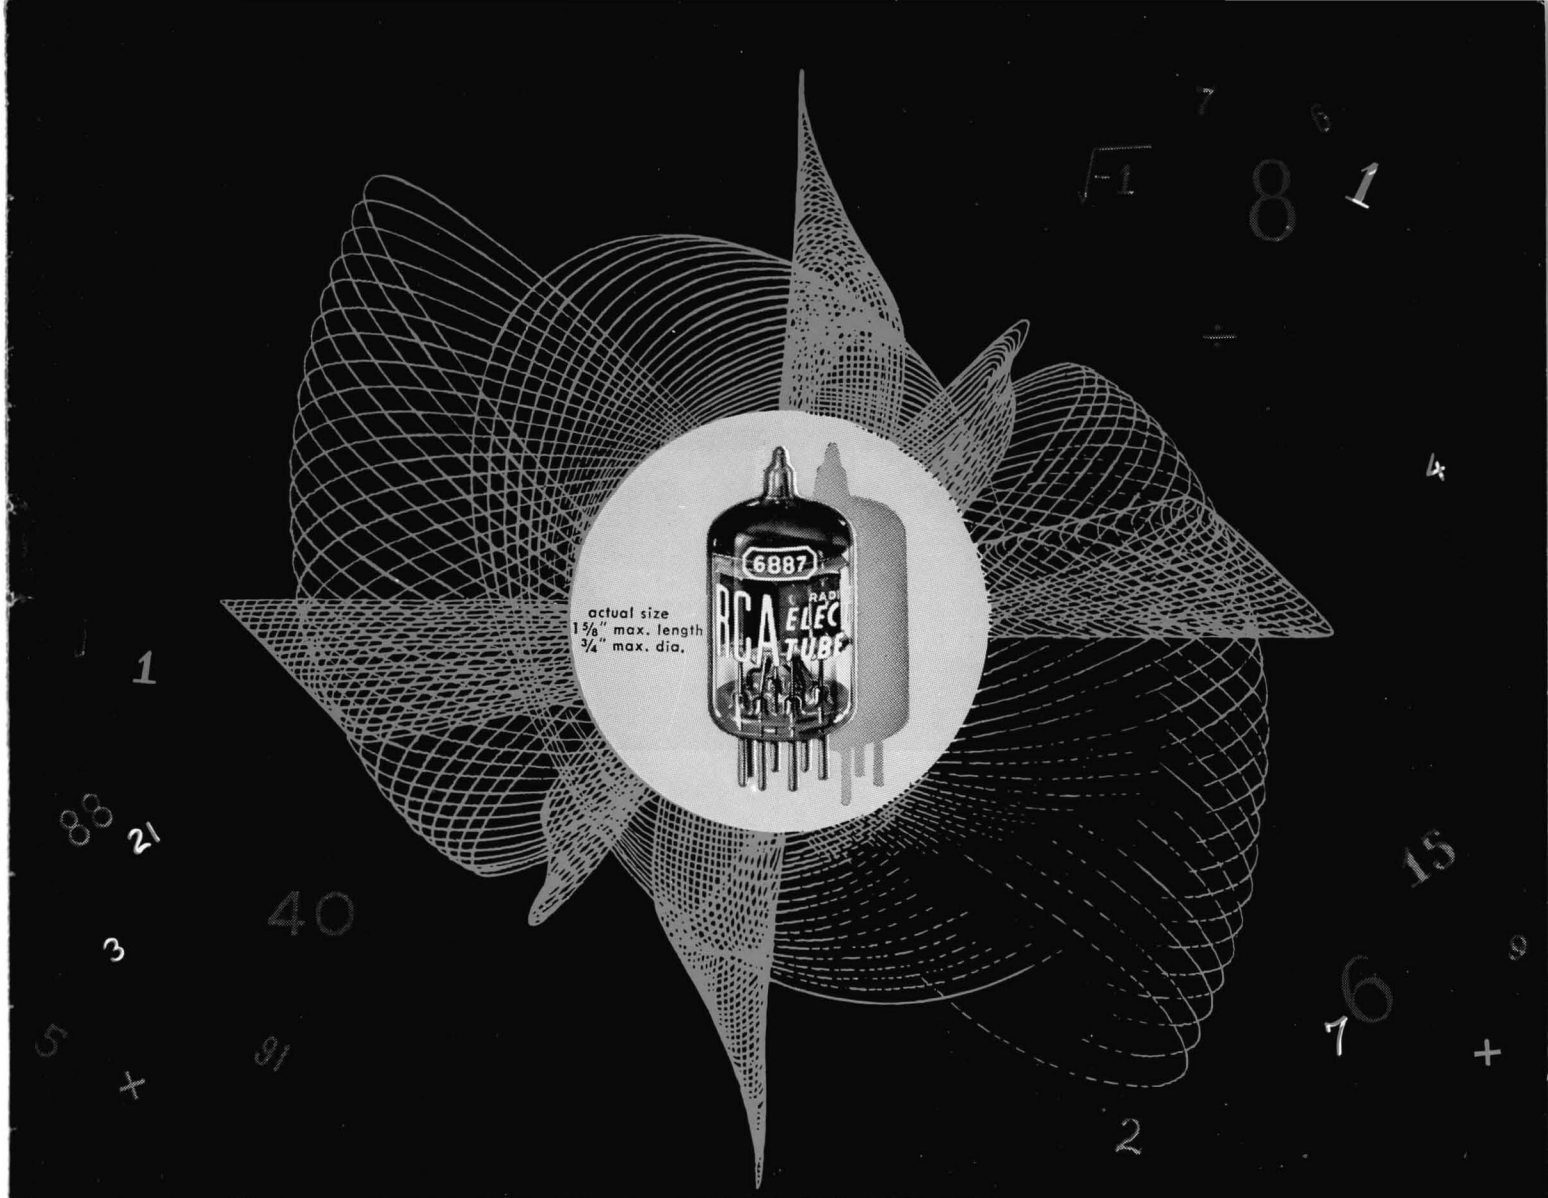

FIRST TWIN DIODE...

Designed especially for computers

RCA-6887 Cuts Heater Power

Combining exceptional dependability, small size, and a low-wattage heater (1.26 watts)...the new RCA-6887 performs with high efficiency on *one third less heater power* than conventional twin diodes. This new tube offers up-to-date advantages for compact, medium-speed switching circuits.

Among the many design features of the RCA-6887 contributing to long life and high dependability are a pure-tungsten heater, special-alloy cathodes which retard interface, high-purity nickel plates, plus a protective shield to minimize interelectrode leakage. Each cathode utilizes a separate base pin to permit flexibility of circuit arrangement.

Strict production controls based on typical electronic computer conditions, extreme care in selection and inspection of materials, and rigorous tests for shorts and leakage—assure uniformity of electrical characteristics and stability initially and throughout life.

RADIO CORPORATION OF AMERICA
Tube Division Harrison, N. J.

Investigate the many advantages RCA-6887 offers your medium-speed electronic computer designs. Contact your RCA Field Representative at the RCA District Office nearest you.

EAST: HUmboldt 5-3900
744 Broad Street
Newark 2, N. J.

MIDWEST: WHitehall 4-2900
Suite 1181
Merchandise Mart Plaza
Chicago 54, Ill.

WEST: RAymond 3-8361
6355 East Washington Blvd.
Los Angeles 22, Calif.

For technical data on RCA-6887, write RCA Commercial Engineering, Section A-90-Q Harrison, N. J.

A PICTORIAL MANUAL ON COMPUTERS, Part 2

1. What Does "Magnetic Tape Memory" Look Like?

This single reel of magnetic tape holds as much information as ten of the file shelves. This reel of magnetic tape contains 2400 feet of magnetic tape and stores information at the rate of 125 characters to the inch. The scene is the Army Ordnance Tank-Automotive Command in Detroit, and the equipment is RCA's Bizmac. (Figure 1)

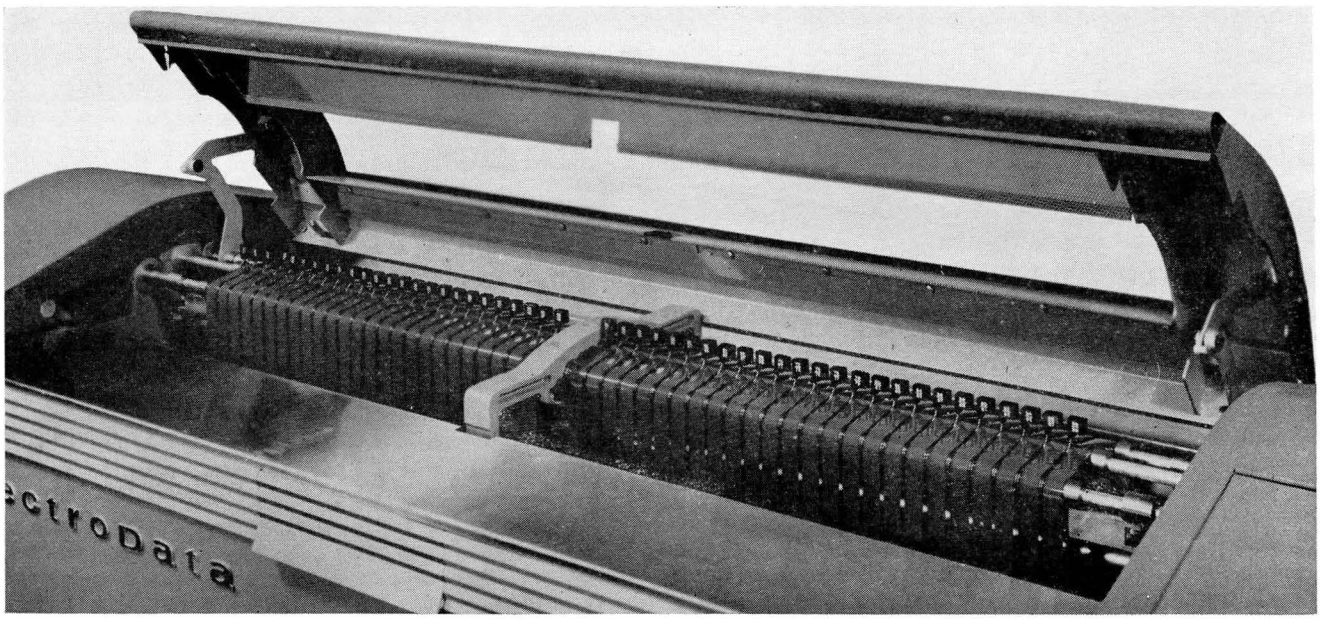

This file contains 50 lengths of magnetic tape, each 250 feet long; and it stores 20 million digits of information. This is the Datafile, part of the Datatron electronic computing system, made by the Electrodata Division of Burroughs Corp., Pasadena, Calif. (Figure 2)

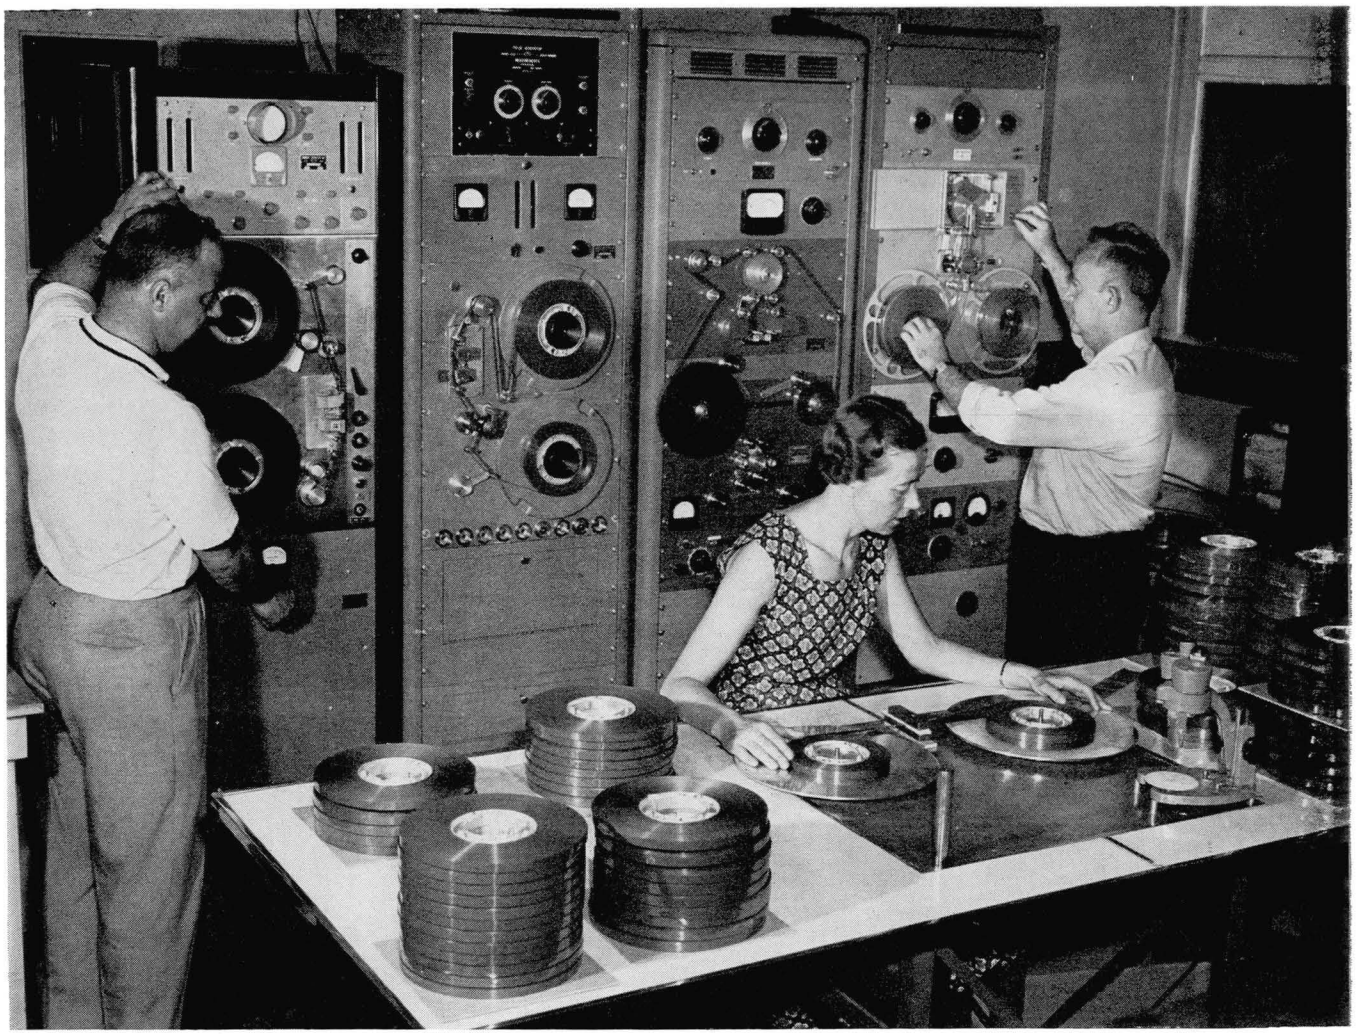

Here, a battery of automatic machines at Audio Devices, Inc., N.Y., makes 100% inspection of magnetic tape intended for use on computers, data processors, instrumentation recorders, etc. Several million pulses are recorded on each reel of tape; if even a single pulse fails to reproduce properly for a tape under test, the machine automatically stops and signals the operator, and the reel is rejected for computer use. (Figure 3)

Here are two views of a magnetic tape input-output unit. The tape is cellulose acetate coated with magnetic oxide, and stores 200 characters per inch, so that a single reel of 2400 feet holds over 5 million characters. At left (Figure 4) we look right into the case and see the two loops of tape at the bottom; their length guides the controls. At the right (Figure 5) Richard Blue of Bell Aircraft Corp., Buffalo, N.Y., is changing a reel. The machine is International Business Machines' Type 727.

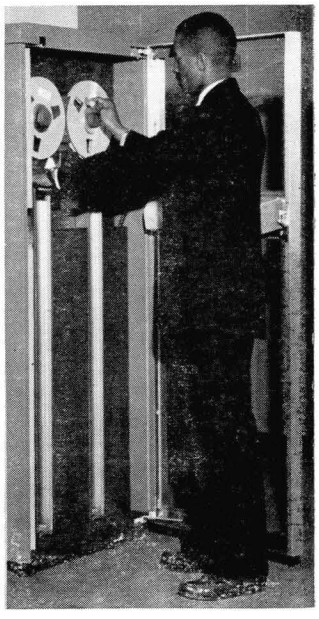

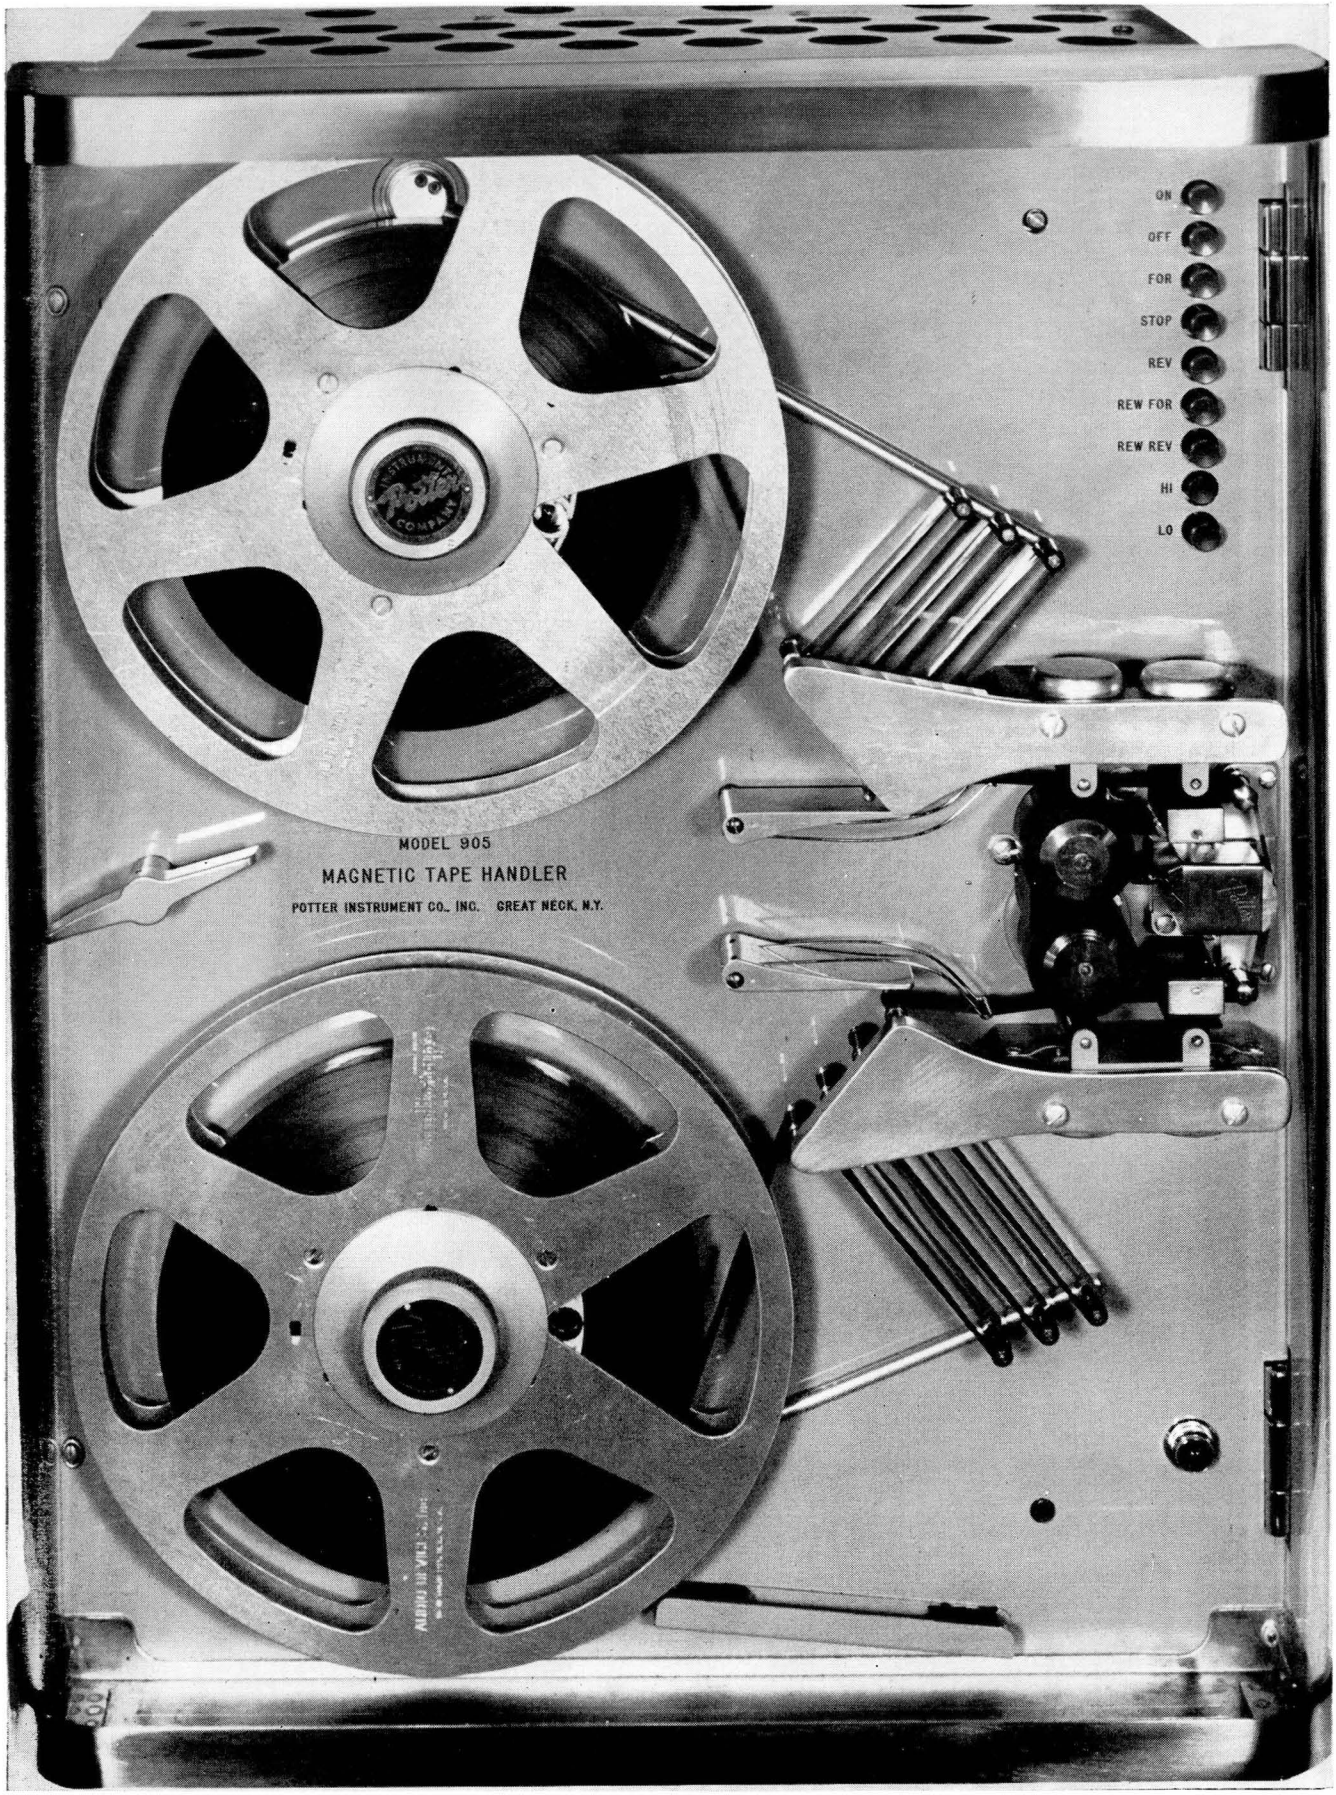

This device handles magnetic tape, recording data on the tape or reading it back. It starts and stops in 3 to 5 thousandths of a second, can travel as fast as 75 inches per second, and accepts a width of tape up to 1½ inches. It is the Model 905 Digital Magnetic Tape Handler made by Potter Instrument Co., Plainview, L.I., N.Y. (Figure 6)

2. What Does "Magnetic Core Memory Look Like?"

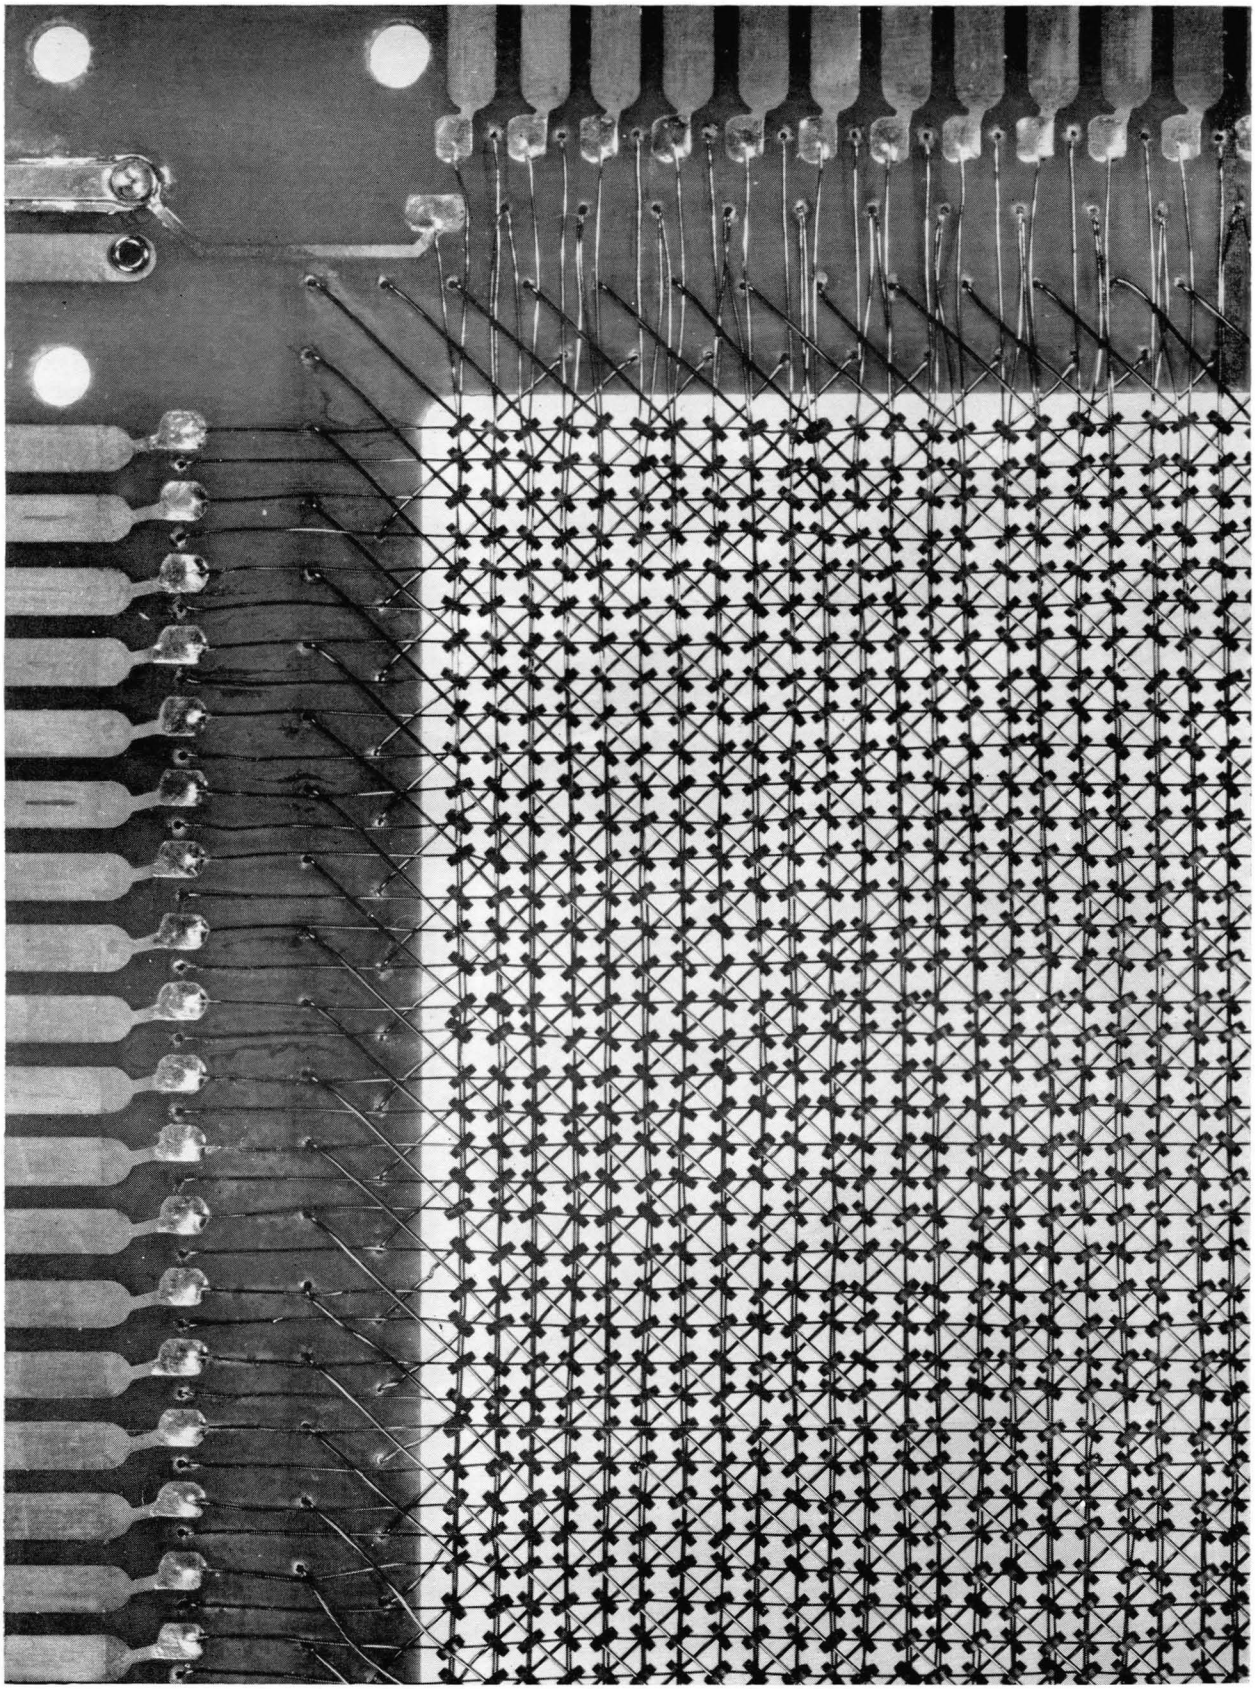

Here is a network of wires strung with tiny beads (magnetic cores shaped like doughnut rings) not much larger than the head of a pin. Each bead is made of a magnetic ceramic called a ferrite, and stores one binary digit of information, a "one" if the core is polarized in one direction, a "zero" if it is polarized in the other direction. This is an enlarged picture of a part of a corner of one of the core memory planes of the Univac II, made by Remington Rand Univac, Division of Sperry Rand. (Figure 7)

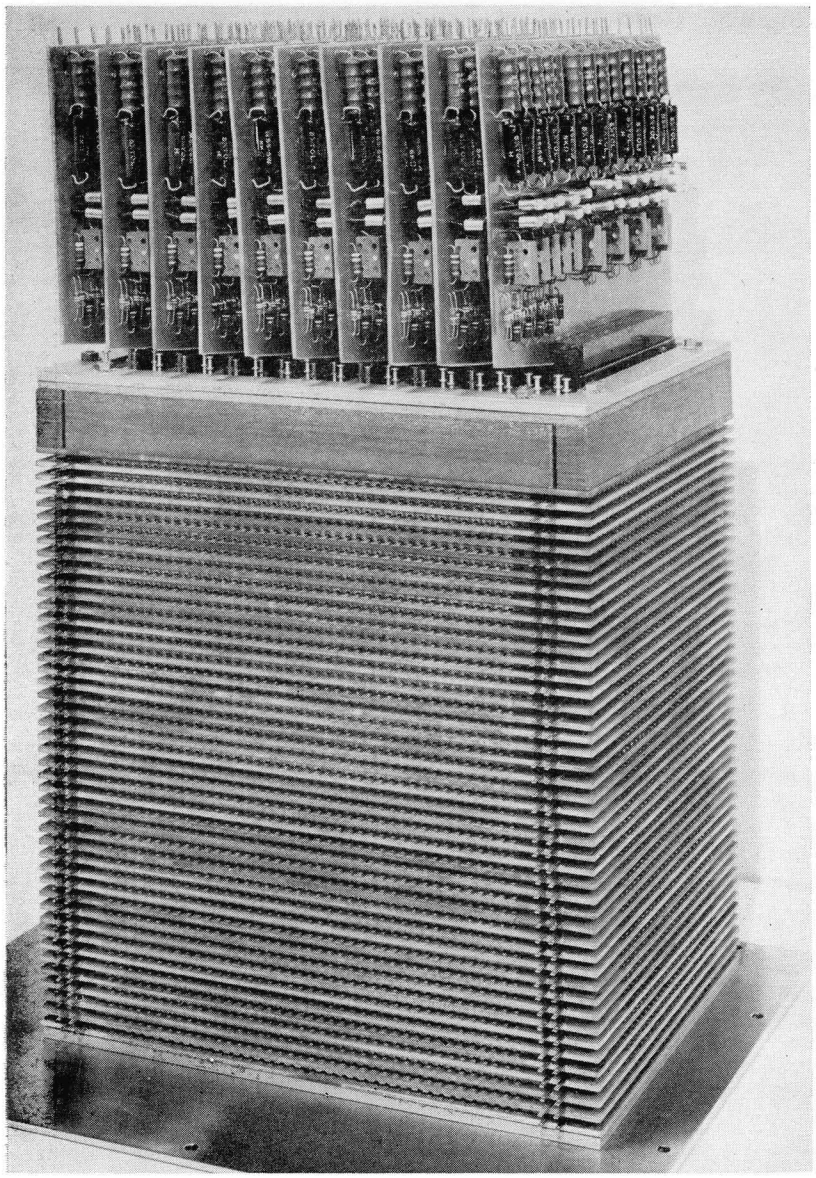

At left is a unit of the core memory stack of the Univac II, of Remington Rand Univac. It consists of about 44 core memory planes, and has a capacity of 24,000 characters. Any register in this memory will supply the information it holds within a few millionths of a second after the call for the information. (Figure 8)

Below are computer magnetic cores of another type, ceramic bobbins wound with tape consisting of any one of several magnetic alloys (Deltamax, Square Permalloy, . . .). The tape is 1/1000 of an inch thick down to 1/8000 of an inch. These cores are made by Arnold Engineering Co., Marengo, Ill. (Figure 9)

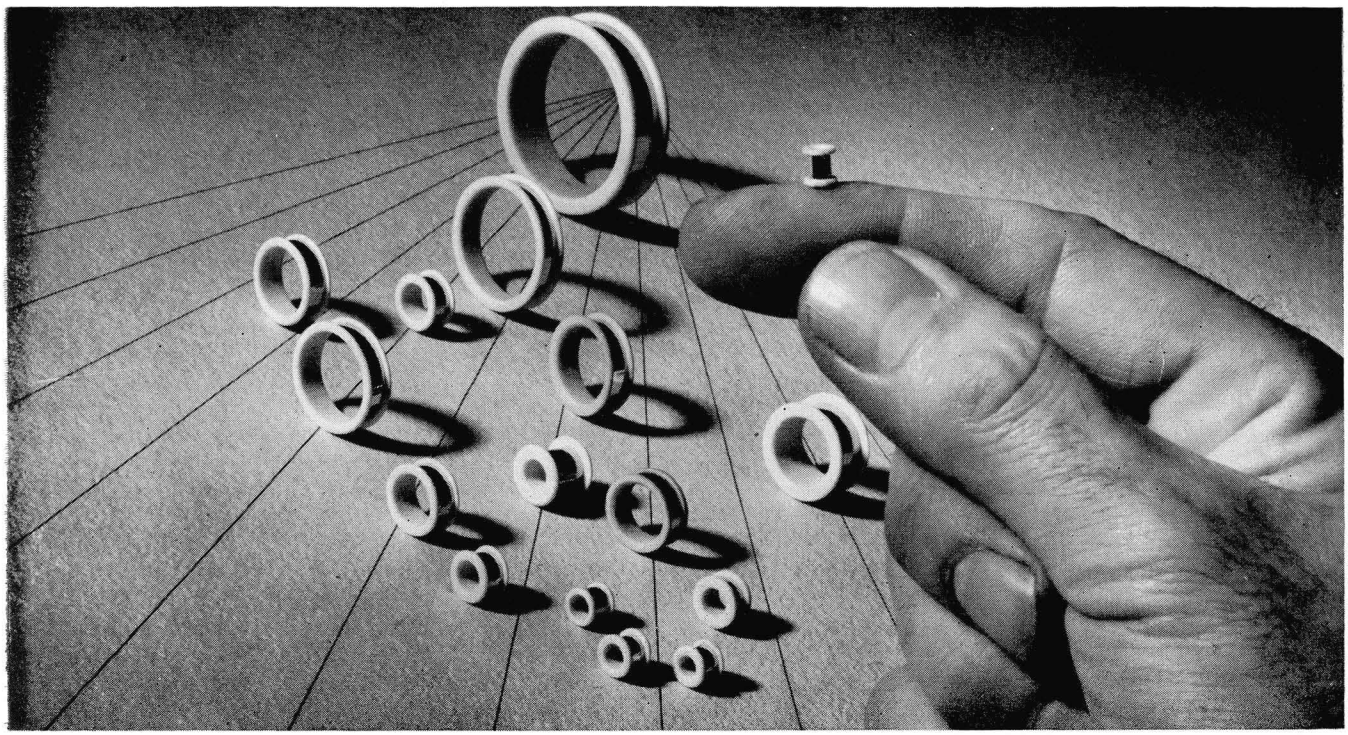

3. What Does "Magnetic Drum Memory" Look Like?"

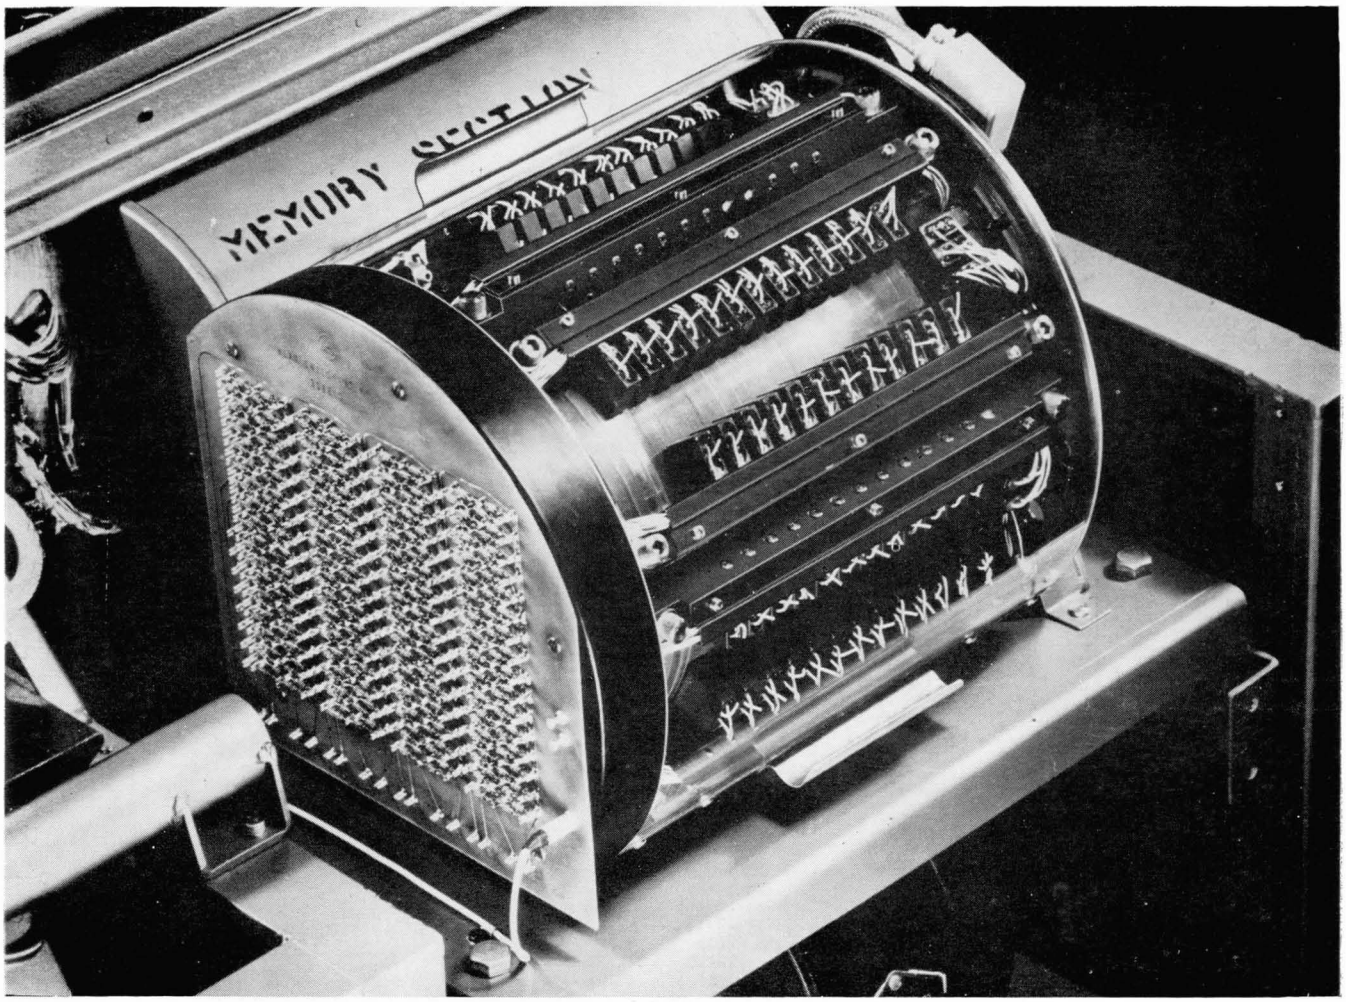

Above is a magnetic drum which is the memory for the Royal Precision LGP-30 Electronic Digital Computer. It stores 4096 machine words, each 32 binary digits long including the algebraic sign and the spacer mark. The computer is made by Librascope in California, and marketed by Royal McBee Corp. in New York, both of them subsidiaries of Royal Precision Corp. (Figure 10)

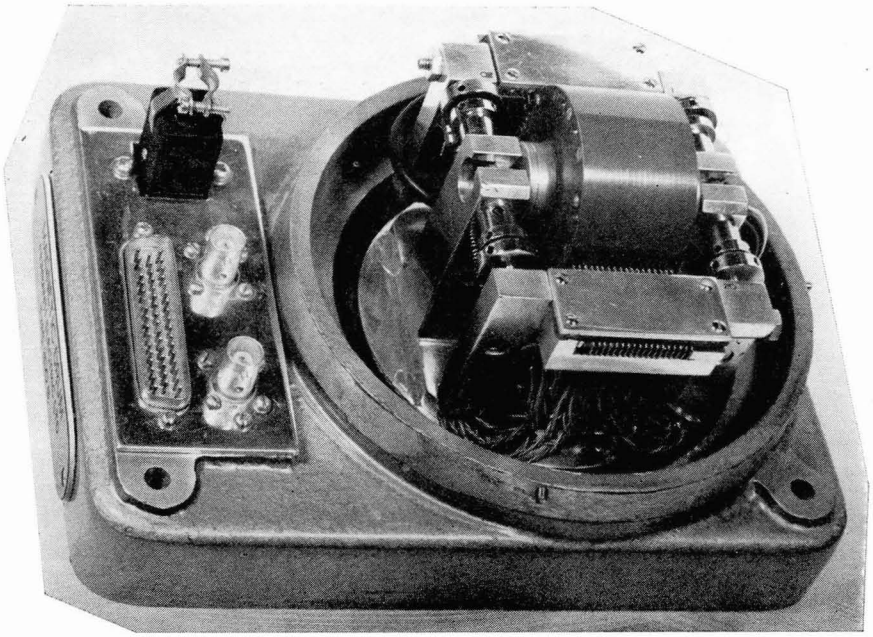

At the left is a very small magnetic drum with great capacity and very high speed, 22,500 revolutions per minute, which leads to fast access to any piece of information stored on the drum. This is the 200B High Speed Magnetic Storage Drum of Ferranti Electric Co., Hempstead, N.Y. (Figure 11)

This giant electronic brain won 8 major contracts — before it was born!

Several weeks ago, a new kind of giant electronic brain started operating in a vast business where complicated records had begun to swamp mortal man and the inadequate machinery at hand.

The name of this giant brain is "DATAmatic 1000". It is Honeywell's electronic data processing system.

But this story is *not* about the amazement of the business technicians who have been watching the DATAmatic 1000 at work. It is not about this system's record-breaking speed and unequalled capacity. Nor is it about this new brain's sizable advantage in true cost.

Skip all that for the moment. Just consider what, perhaps, is the most remarkable fact of all:

Eight of America's top organizations contracted for the two-million-dollar DATAmatic system many months ago — long before it was possible to see the physical machinery of this electronic marvel.

That is the kind of confidence they had in Honeywell engineering and scientific skill.

That is the tribute they paid to the keen engineers who had clearly taken a giant step forward in electronic data processing.

Do you wonder that Honeywell views this endorsement with pride?

And, in view of this multi-million-dollar vote of confidence, do you wonder that leaders in business are placing DATAmatic 1000 high on the list for investigation?

Consideration of any large-scale data processing program is incomplete without the facts on DATAmatic 1000. Our applications engineers will be glad to discuss your requirements. *Write for details to Walter W. Finke, President, DATAmatic, Dept. A1, Newton Highlands 61, Massachusetts.*

Honeywell

DATAmatic
ELECTRONIC DATA PROCESSING

ANNUAL INDEX TO COMPUTERS and AUTOMATION
Part 2

This index covers information published in the twelve issues of COMPUTERS and AUTOMATION, vol. 5, no. 12, Dec. 1956, to vol. 6, no. 11, Nov. 1957. The last part of each entry gives: volume/number (month of issue), page number.

Part 1 of this index was published in the preceding issue, December, 1957.

CORRECTIONS: in the February 1957 issue, pages 24, 25, and 41 and; in the June 1957 issue, page 15, 6/11 (Nov.), 3; in the Oct. 1956 issue, 5/12 (Dec. 1956), 9; in "The Computer Directory, 1956," pages 19 and 59, 5/12 (Dec. 1956), 9

"Council for Basic Education," 6/1 (Jan., Part II), 59

"Council Formed by Schools and Industry for Improving Science Instruction," Hughes Aircraft Co., 6/9 (Sept.), 21

Course, "A Survey Course in Automatic Data Processing Systems," by Lowell H. Hattery and Charles A. Phillips, 6/7 (July), 12

"Courses in Automatic Control," 6/3 (Mar.), 25

"Courses in Machine Accounting and Electronic Data Processing," Denis S. Philips, 6/10 (Oct.), 26

Culbertson, James T., "Robots and Automata: A Short History," 6/3 (Mar.), 32;
"Robots and Automata: A Short History (Bibliography)," 6/4 (Apr.), 20

D: Data handling, "Electronic Digital Data Handling," by Howard T. Engstrom, 6/2 (Feb.), 20

"The Datamatic 1000 Computer," by Henry W. Schrimpf, 6/4 (Apr.), 8

Davies, R. H., "Lattice Networks for Digital Storage," 6/5 (May), 19

Decision, "A Big Decision: Lease or Buy?", by Theodore Labiner, 6/10 (Oct.), 6

Diebold, John, "Industry and the Automated Future: Problems Along the Way," 6/2 (Feb.), 14

"Distribution of Empty Box Cars," 6/9 (Sept.), 28

"Division of Labor in Scientific Digital Computer Service Facilities," by L. N. Caplan, 6/4 (Apr.), 6

Dumey, Arnold I., "Indexing for Rapid Random Access Memory Systems," 5/12 (Dec. 1956), 6

E: Eastern Joint Computer Conference: New York, Dec. 10-12, 1956, "New Developments in Computers—Program Titles, and Abstracts," 5/12 (Dec. 1956), 20;
Washington, D.C., December 9-13, 1957, Program Titles, and Abstracts, 6/11 (Nov.), 26

"An Economist Looks at Data Processing," by Harry I. Greenfield, 6/10 (Oct.), 18

Education: "The Computer's Challenge to Education," by Clarence B. Hilberry, 5/12 (Dec. 1956), 16;
"Council for Basic Education," (Editor's Note), 6/1 (Jan., Part II), 59;
"Council Formed by Schools and Industry for Improving Science Instruction," Hughes Aircraft Co. (in Forum), 6/9 (Sept.), 21;
"High School Science Education," by Richard W. Melville, 6/1 (Jan., Part II), 55;

[Please turn to page 25]

The New

BRYANT MAGNETIC STORAGE DRUM

Economical . . . Precise . . . and Versatile!

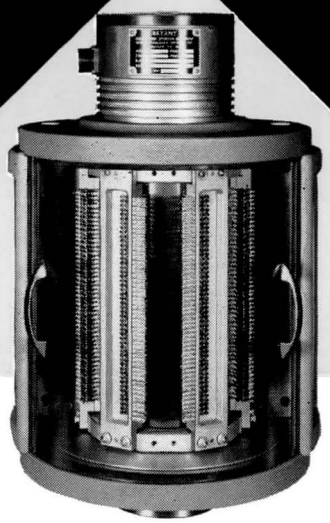

The new 512A Bryant general purpose magnetic storage drum is built to meet the exacting requirements of all permanent storage problems, yet is versatile enough to be used as a laboratory instrument. It is the result of 25 years' experience in designing and producing high-speed precision spindles. These standard 5" dia. x 12" long drums are stocked for immediate shipment at a price that reflects quantity manufacture, far below the cost of customer-designed drums.

Features:

- Guaranteed accuracy of drum run-out, .00010" T. I. R. or less.
- Integral motor drive – Bryant precision motor
- Capacities to 625,000 bits
- Speeds up to 12,000 R. P. M.
- 500 kilocycle drum operation possible
- Accommodates up to 240 magnetic read/record heads
- Provides for re-circulating registers as well as general storage
- High density ground magnetic oxide coating
- Super-precision ball bearing suspension
- Vertical mounting for trouble-free operation

Write for complete details on the new No. 512A

BRYANT GAGE and SPINDLE DIVISION
P. O. Box 620-K, Springfield, Vermont, U. S. A.
DIVISION OF BRYANT CHUCKING GRINDER CO.

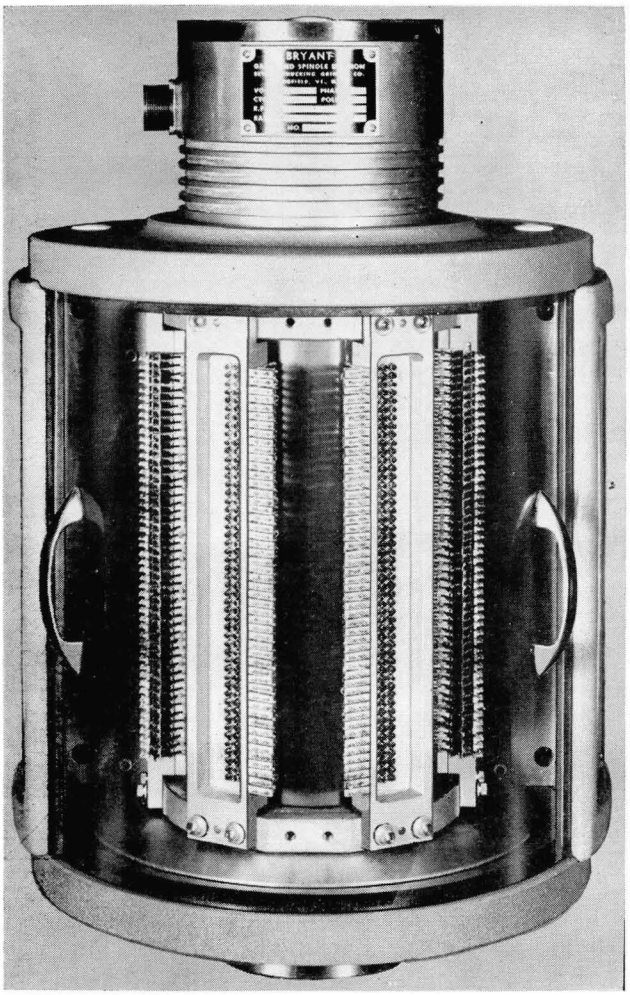

This magnetic drum (at left) is 5 inches in diameter and 12 inches long; it can turn at speeds up to 12,000 revolutions per minute, permits 240 magnetic read/record heads, and can store as many as 625,000 binary digits of information. This is the Type 512A drum made by the Bryant Gage and Spindle Division, Springfield, Vt. (Figure 12)

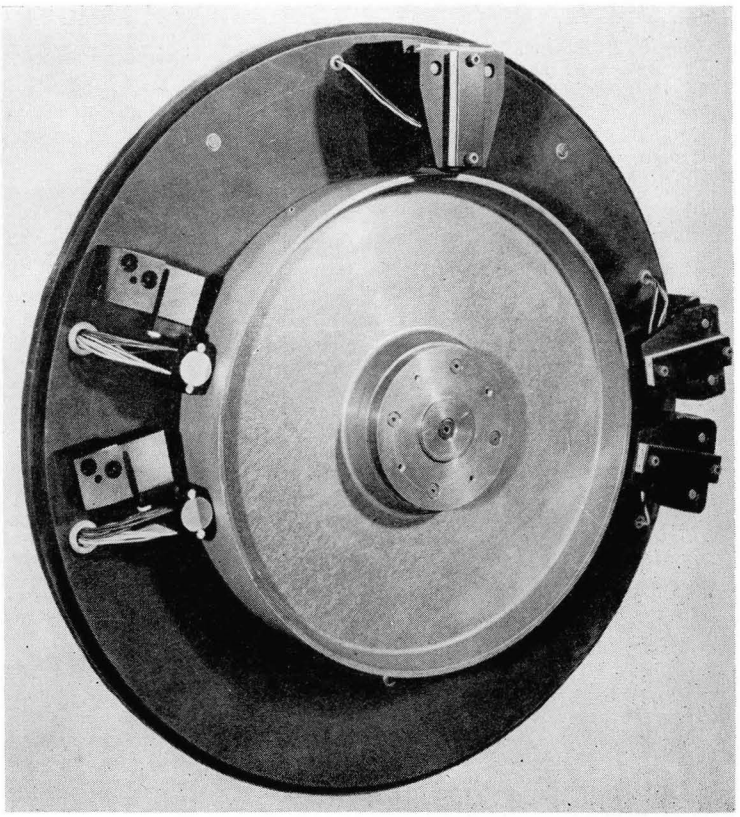

The magnetic drum (at right) in a usual application can: provide 28 channels of storage; contain 2400 binary digits on each channel; store about 67,000 binary digits of information; turn at 3600 revolutions per minute. This is the Monrobot 28 drum made by the Electronics Division, Monroe Calculating Machine Co., Morris Plains, N.J. (Figure 13)

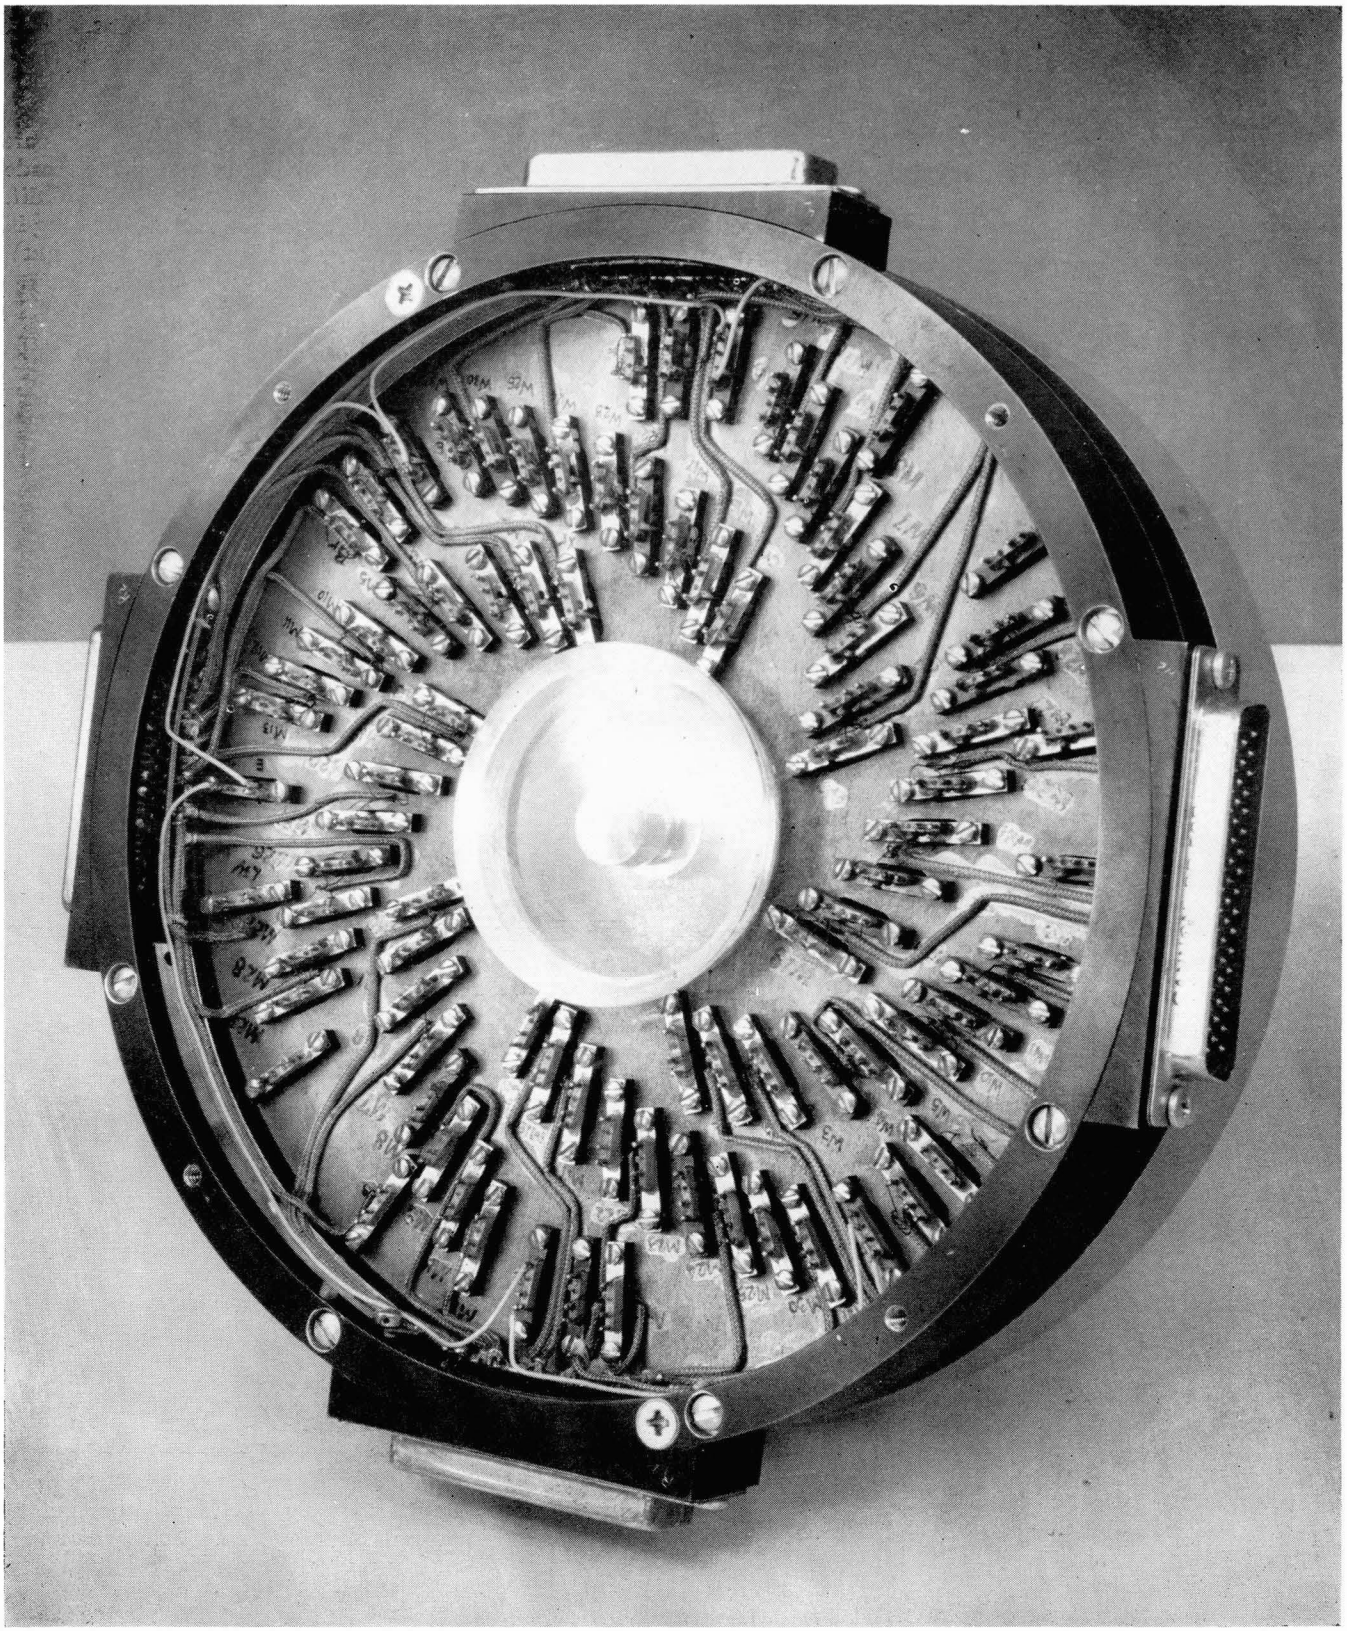

This is a magnetic disk memory for a digital computer. Eighty-eight separate magnetic heads are arranged over the disk, each one attending to a different track. The total diameter of the disk is eight inches. The density with which information is packed on this disk is stated to be "five times greater than the average rotating magnetic memory unit." This magnetic memory is used in the portable, general purpose, digital computer, RECOMP, made by Autonetics, Division of North American Aviation, Downey, Calif. (Figure 14)

4. What Do "Computer Components" Look Like?

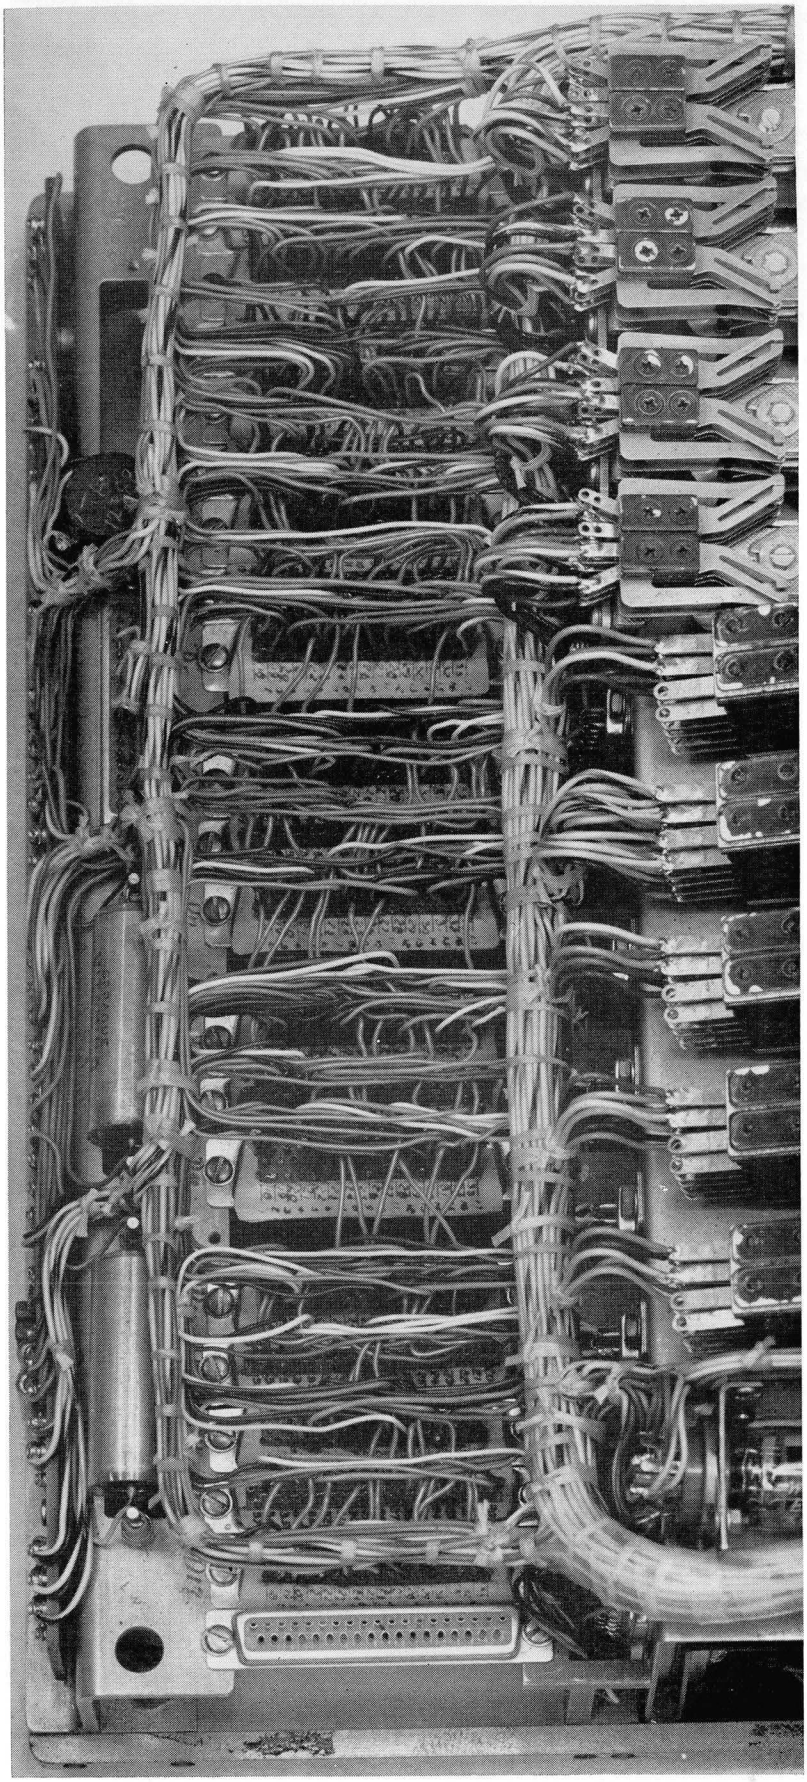

At left is a picture of components in part of the logical section of a computer made by Litton Industries, Beverly Hills, Calif. It shows wiring cables, sockets for plug-in circuit boards, nine relays (at the right), and other components. (Figure 15)

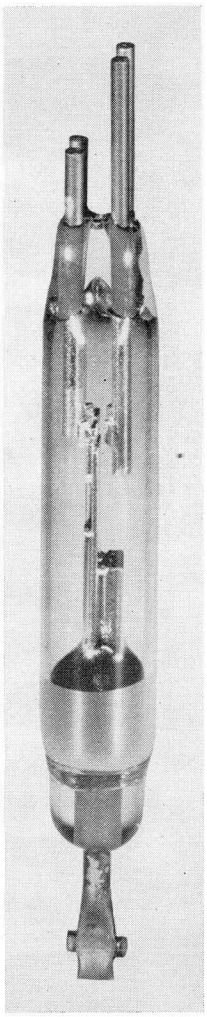

Above is the switching portion of a relay of an unusual type. The contacts have platinum surfaces, wetted all the time by mercury connected in a capillary way to a mercury reservoir, the whole being sealed in a glass capsule in an atmosphere of hydrogen at high pressure. The switch has a life of billions of operations, no "bounce" of contacts, and is extraordinarily stable. It is part of a mercury wetted contact relay made by C. P. Clare and Co., Chicago, Ill. (Figure 16)

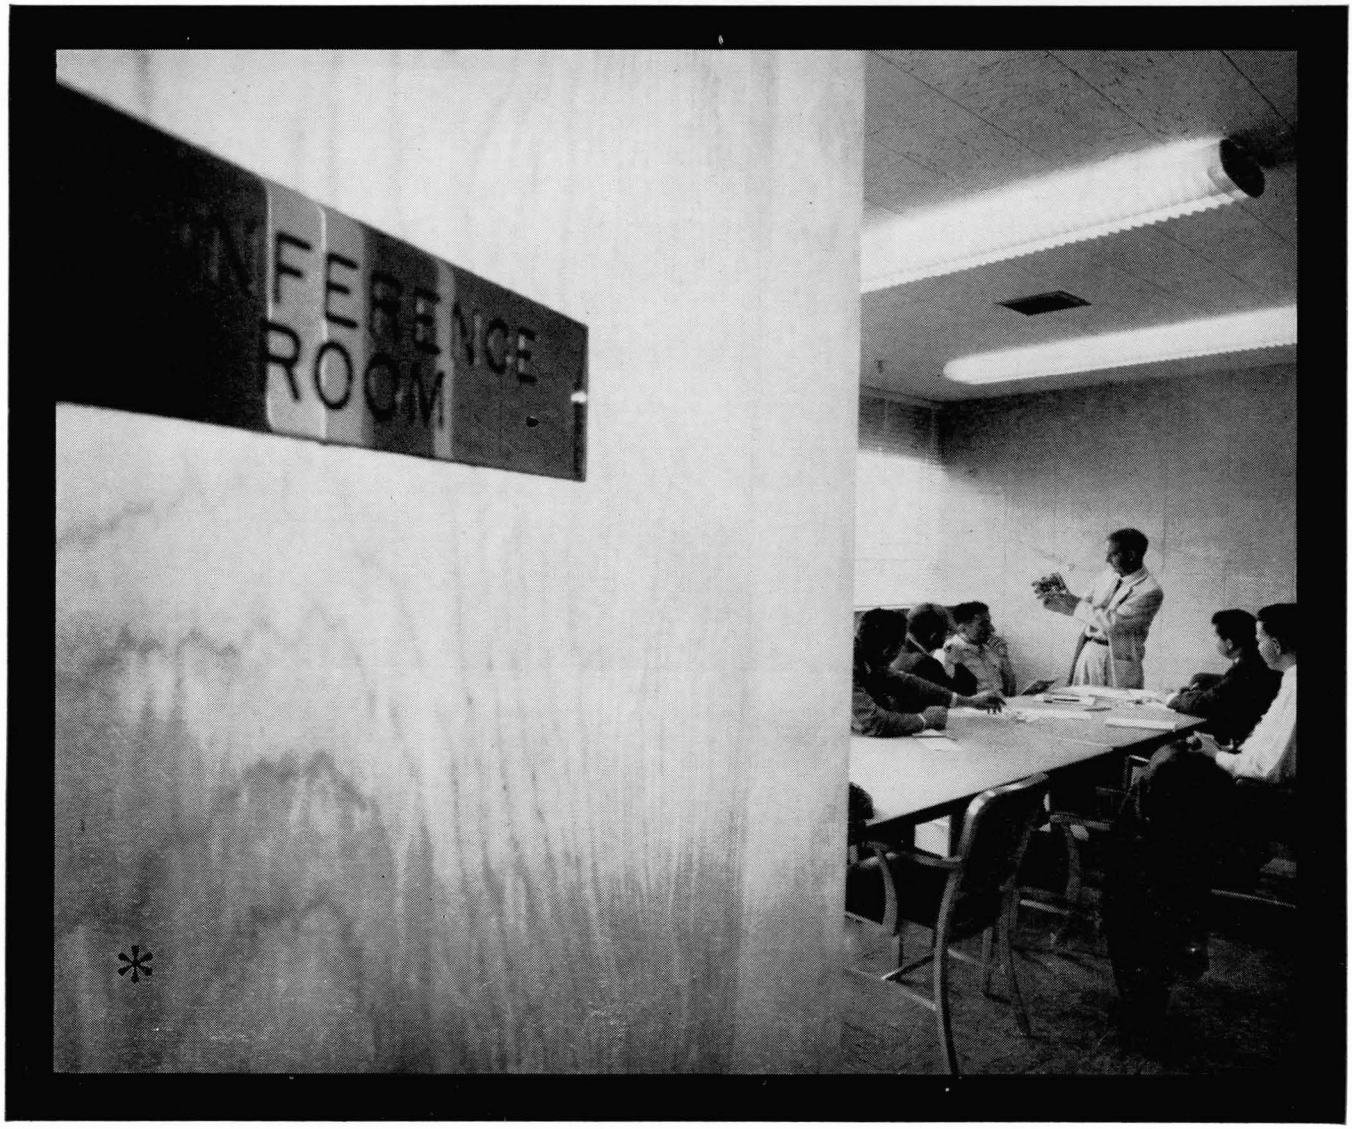

team with variations

Well known in operations research is the team approach, through which many varied disciplines are brought to bear on a problem. But tech/ops, a leader in the field of operations research, varies in this approach with individual, solitary thought and research. The team concept, together with individually conceived ideas, has produced a highly successful technique which is developing unique solutions to complex operations research problems in the fields of weapons systems, tactics, organizations and logistics.

You may find the variation *your* career needs to grow into its fullest, most meaningful expression, when you join the tech/ops team of scientists at Fort Monroe, Virginia; Burlington, Massachusetts; Monterey, California; or Washington, D. C.—where the future is being explored *now.*

Address: ROBERT L. KOLLER

TECHNICAL OPERATIONS, INCORPORATED
Burlington, Massachusetts

for your career at

FORT MONROE, Virginia: Three senior appointments available on the staff of Combat Operations Research Group. Candidates should have training at least on masters level in physics, mathematics or statistics, several years' experience in operations research or related fields.

BURLINGTON, Massachusetts: Senior appointment available for scientist to direct development of computer-simulation programs to solve complex operations research problems. Must have several years' experience in computer field.

WASHINGTON, D. C.: Two appointments available for operations analysts with training and experience in computer technology.

MONTEREY, California: Senior appointment available for scientist to direct operations of field experiment group.

tech/ops

* *Dr. Ian W. Tervet, Director of tech/ops' Monterey office, discusses a problem with a team of tech/ops scientists.*

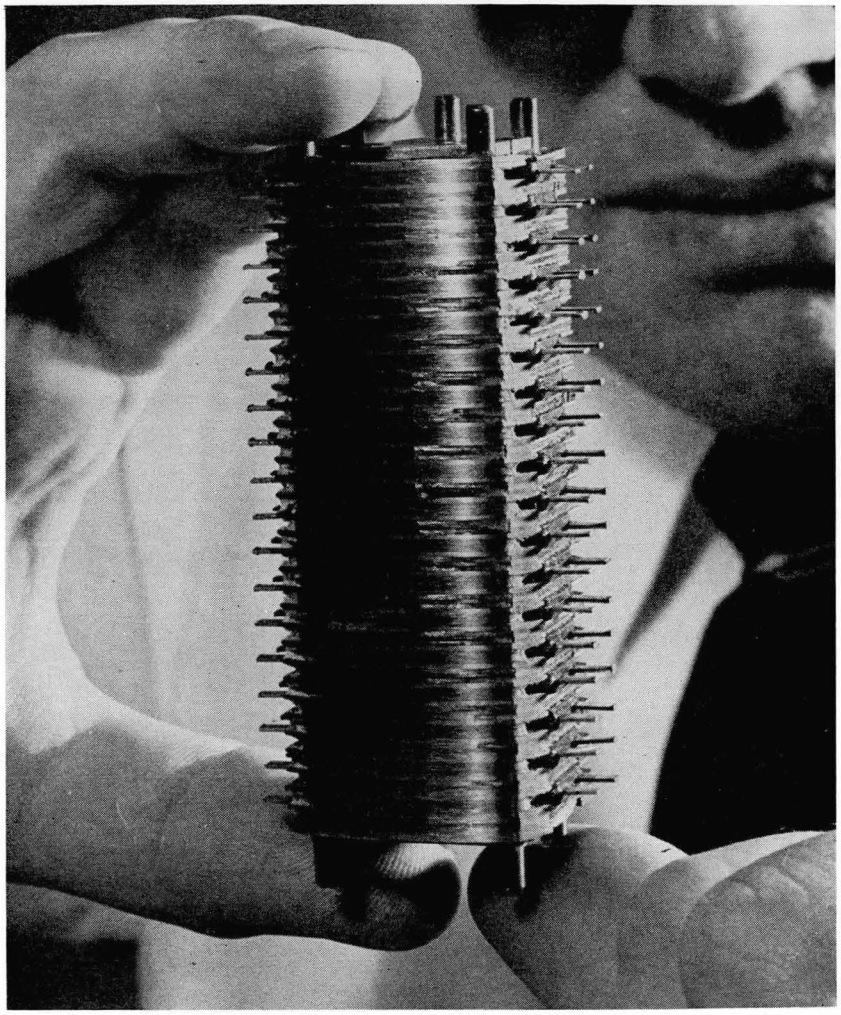

At left is an assembly of 18 magnetic heads, for reading from or recording on magnetic tape three inches wide; the device will handle 60,000 decimal digits per second. This is part of the Datamatic 1000 Electronic Dataprocessing System, made by Datamatic Corp., Newton, Mass. (Figure 17)

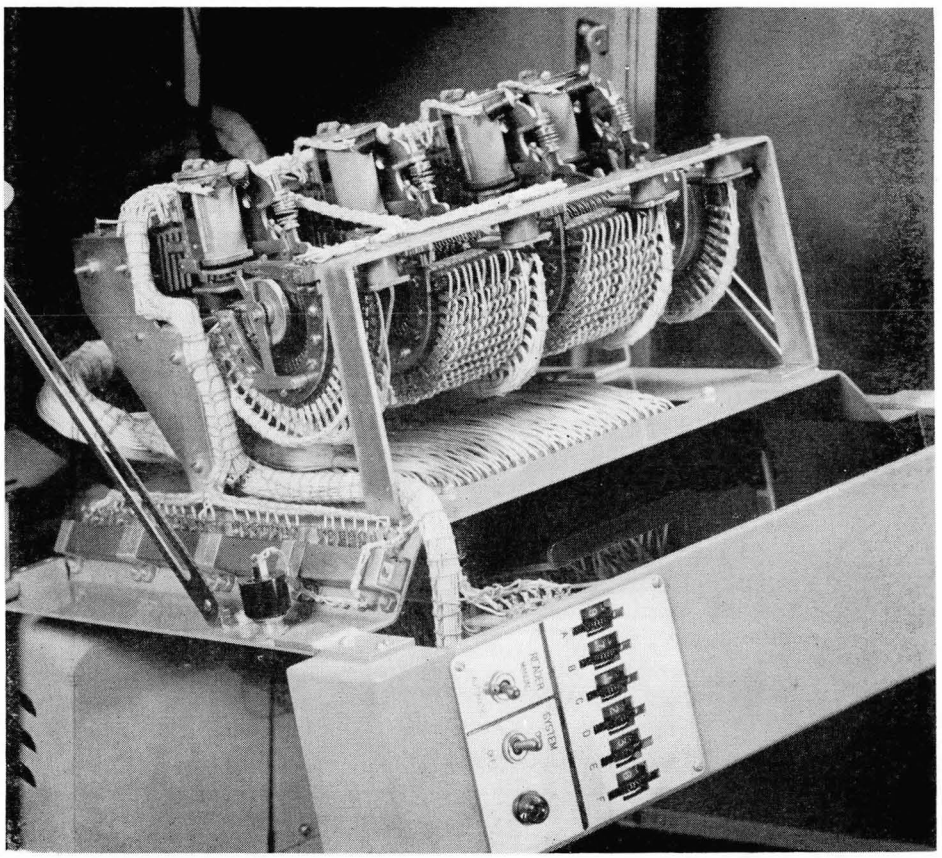

At right is a bank of four stepping switches, in use in the Dataflo Programmer 275, made by Underwood Corp., New York. (Figure 18)

Annual Index

[Continued from page 19]

"Hughes to Give Fellowships to 200 in Science," Hughes Aircraft Co., 6/1 (Jan., Part II), 63;
"Objective Measures of Education," by Donald Truitt, 6/1 (Jan., Part II), 60;
"The Role of Computers in High School Science Education," by George E. Forsythe, W. Eugene Ferguson, and DeForest L. Trautman, 6/8 (Aug.), 15;
"Satellites and Computers — and Psychology," by Edmund C. Berkeley, 6/11 (Nov.), 6;
"Three Comparisons," (in The Editor's Notes), 6/1 (Jan., Part II), 50
"Education and Computers," by Bo Brown, 6/3 (Mar.), 44
"Education and Computers — I," (in The Editor's Notes), 6/1 (Jan., Part I), 6
"Education and Computers — II," (in The Editor's Notes), 6/1 (Jan., Part II), 50
"Education and Computers—Discussion," from A. Lange and D. Truitt (in Forum), 6/3 (Mar.), 30
"Education and Computers — June, 1957, Report," (in The Editor's Notes), 6/7 (July), 6
"Education and Computers, Report No. 1," 6/1 (Jan., Part II), 50
"Education for Automation," by A. S. Householder, 6/1 (Jan., Part II), 51
"The Effect of Missiles on Computers," (in The Editor's Notes), 6/8 (Aug.), 3
"Election Predictions by Electronic Computer," Underwood Corp., 5/12 (Dec. 1956), 29
"Electric Typewriter Input-Output for Computers," IBM Corp., 6/2 (Feb.), 43
"Electronic Computer Charts Game — Teaches Business Executives How to Make Decisions," (News Item), 6/6 (June), 93
"Electronic Computers Aid The Search for Oil," (New Products & Ideas), 6/9 (Sept.), 28
"Electronic Computing Machines in the National Economy of the Soviet Union," by V. Pekelis, 6/2 (Feb.), 22
"Electronic Digital Data Handling," by Howard T. Engstrom, 6/2 (Feb.), 20
"Electronic Roulette Demonstrates Computers," Bendix Computer Div., 6/3 (Mar.), 13
England, Samuel J. M., "Magazines on 'Computology,'" 6/5 (May), 37
English syntax patterns, "Syntax Patterns in English Studied by Electronic Computer," by National Bureau of Standards, 6/7 (July), 15
Engstrom, Howard T., "Electronic Digital Data Handling," 6/2 (Feb.), 20
"Estimate of Computer Market — Summary of Replies March 8 to April 15, 1957," 6/5 (May), 10
"Estimate of the Computer Market — Survey," form of questionnaire, 6/5 (May), 40
"Exchanges of Information," from V. Barashenkov, 6/9 (Aug.), 26
"Experiments in Chess on Electronic Computing Machines," by P. Stein and S. Ulam, 6/9 (Sept.), 14

F: Fairchild Controls Corp., "A New Radar Device for Corrected Mapping," 6/5 (May), 19
"Fallout Computer — Some Technical Corrections," by J. Howard Wright, (in Forum), 6/10 (Oct.), 23

[Please turn to page 29]

General Insurance of America tested

. . . *and picked* audiotape

Chief Engineer cites type EP Audiotape for "dust-free coating, uniform signal output . . . high precision"

WHEN General Insurance Company of America bought four Electrodata tape transports 18 months ago, they knew one thing: their computing system should have the finest magnetic recording tape available. It was decided that the best way to make the final decision was to test.

The tests started immediately. Every nationally known make of magnetic recording tape was used on the transports for at least a month. The result was clear; type EP Audiotape was chosen.

As D. G. Jessup, Chief Engineer of General's Computing Department, wrote in a letter to Audio Devices, "To obtain the optimum reliability and performance from our computing system we need the oxide dust-free coating, uniform signal output level correct in both directions of travel, and high precision reels which you supply. Keep up the good work!"

The extra precision Mr. Jessup found in type EP Audiotape is not a matter of chance. Rather it is the result of meticulous selection and inspections that start when the master rolls of base materials are examined for uniformity. The quality control is continued through the manufacturing process, ending only when the tape is checked by a defect counter, rejects discarded, and the defect-free tape packed in sealed containers. This high standard of control is backed up by our guarantee that every reel of type EP Audiotape is defect-free.

For more information on type EP AUDIOTAPE, write for Bulletin T112A. Write to Box TA, Audio Devices, 444 Madison Ave., New York 22, N.Y.

audiotape TRADE MARK

AUDIO DEVICES, INC., 444 Madison Ave., New York 22, N. Y.
Offices in Hollywood and Chicago
Export Dept.: 13 East 40th St., New York 16, N. Y.

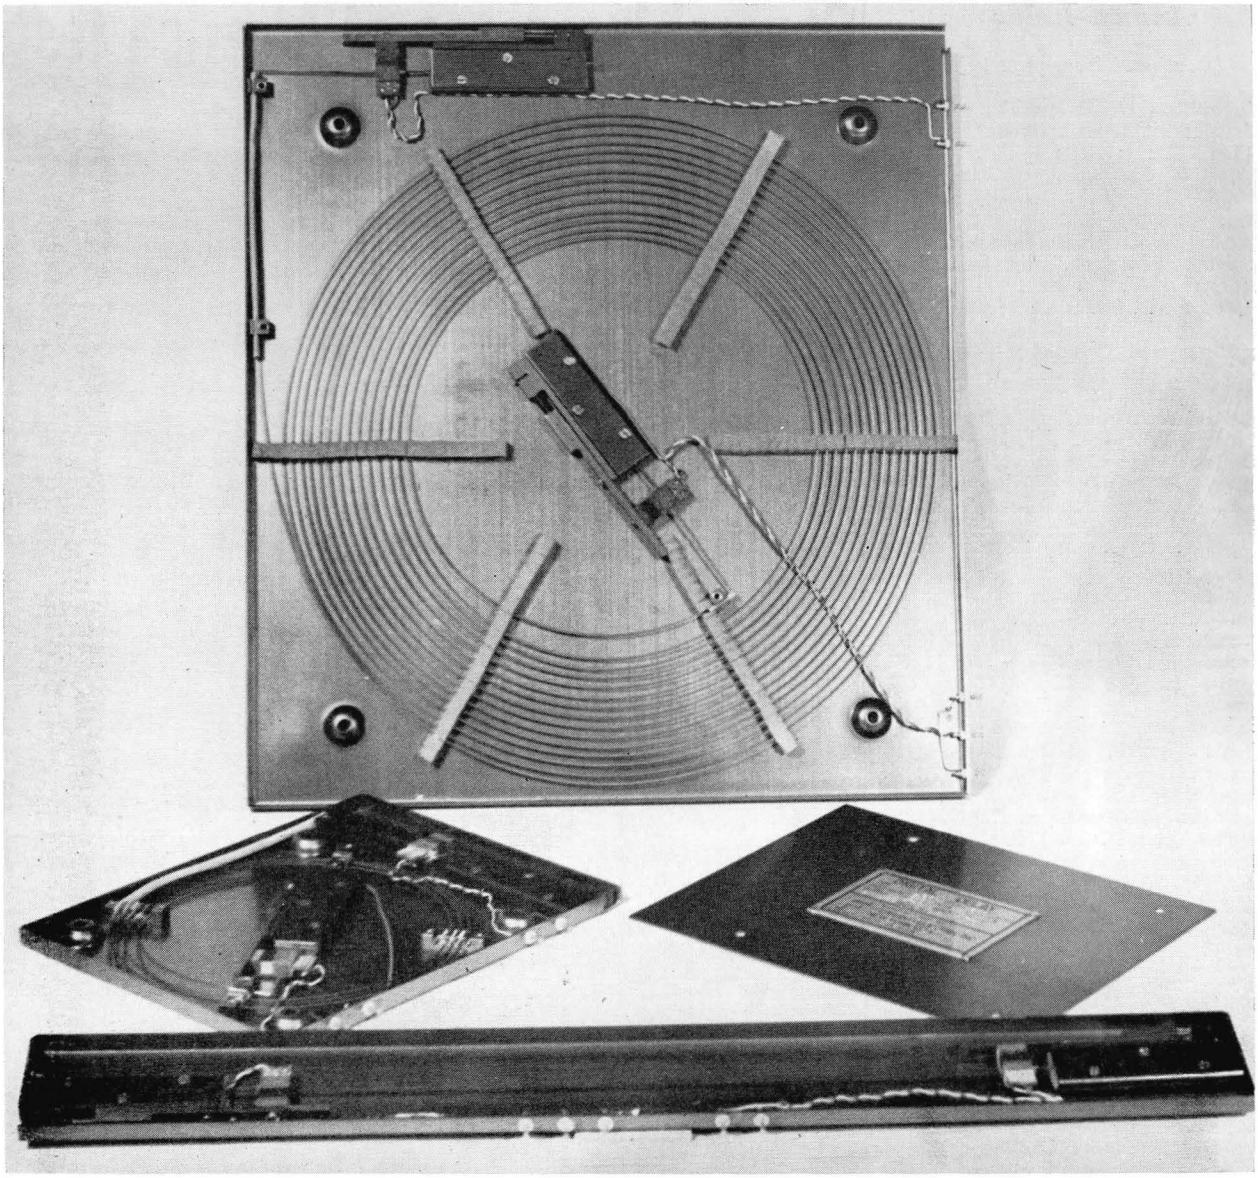

Here is a delay line of the magnetostriction type, stable under changing temperatures. Such a delay line will provide up to 1/200 of a second delay for separate pulses as fast as one million a second. It is made by Ferranti Electric, Inc., Hempstead, N.Y. (Figure 19)

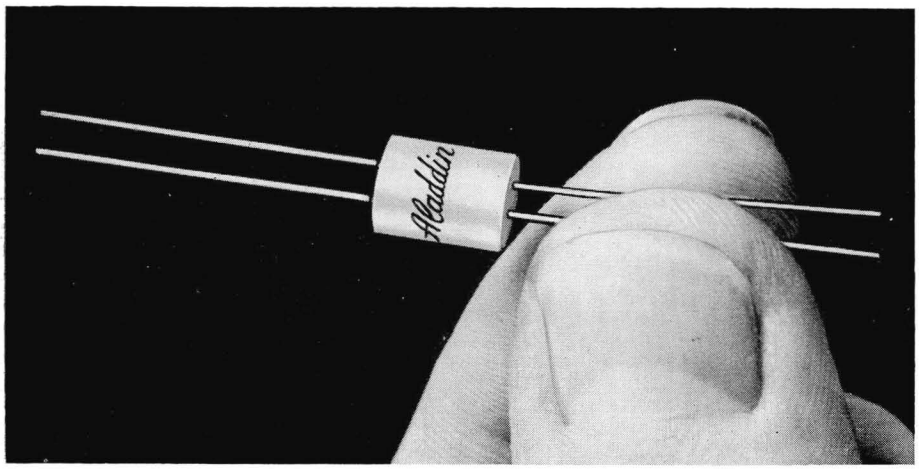

At left is a pulse transformer, .285 inches in diameter, and .350 inches long, held between thumb and forefinger. The core is ferrite; the two or more windings are made of size 48 wire. Many large-scale electronic data processing machines contain 1500 or more pulse transformers. This one is made by Aladdin Industries, Nashville, Tenn. (Figure 20)

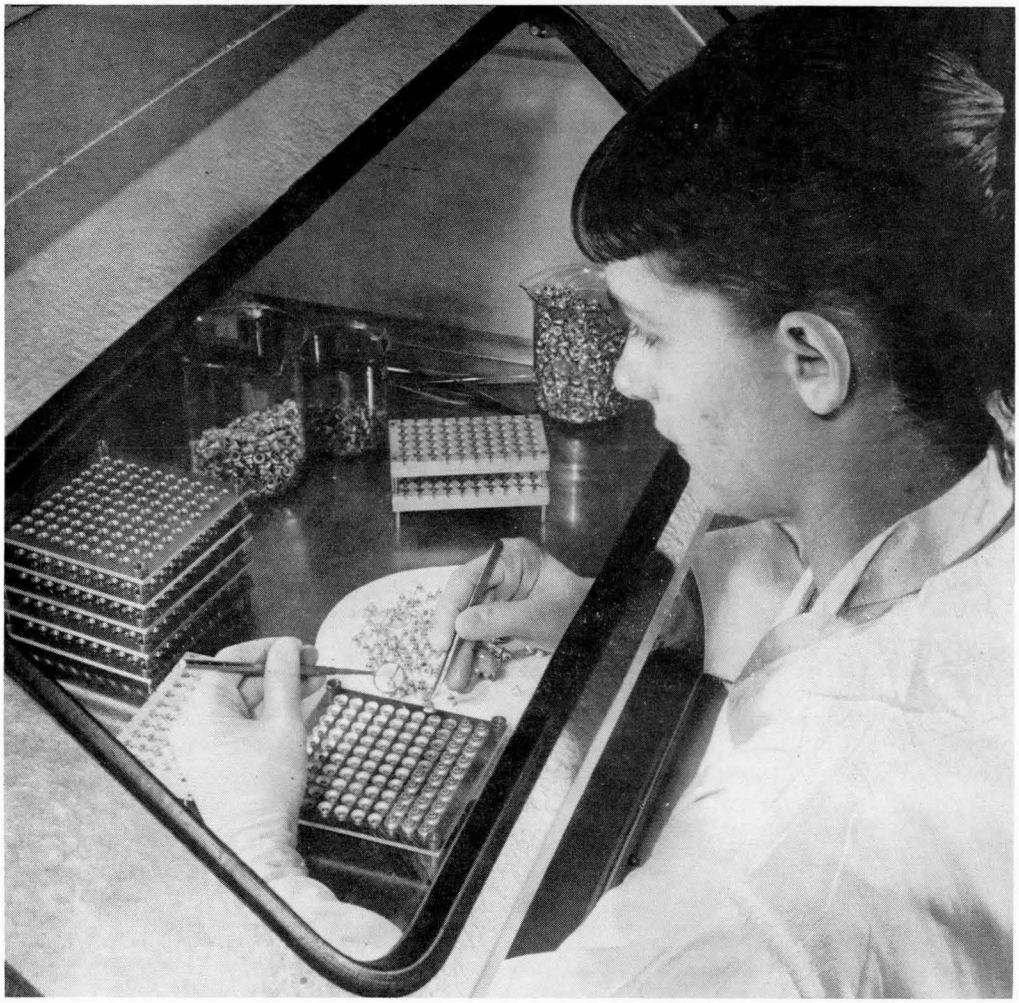

(At left)
Here is the final process of assembly of some transistors under a hood that keeps out dust and moisture. Ruth Lewandowski is using a dental mirror to guide her, as she fits metal caps on rows of transistors. The place is the semiconductor manufacturing plant of Hughes Aircraft Co., Los Angeles. (Figure 21)

Below is the top of a sandwich of two cards with four surfaces of etched wiring, containing all the diodes for gating signals in the Royal Precision LGP-30 Electronic Computer. The board contains 680 diodes and is pluggable. The machine is built by Librascope, California, and is marketed by Royal McBee, New York.
(Figure 22)

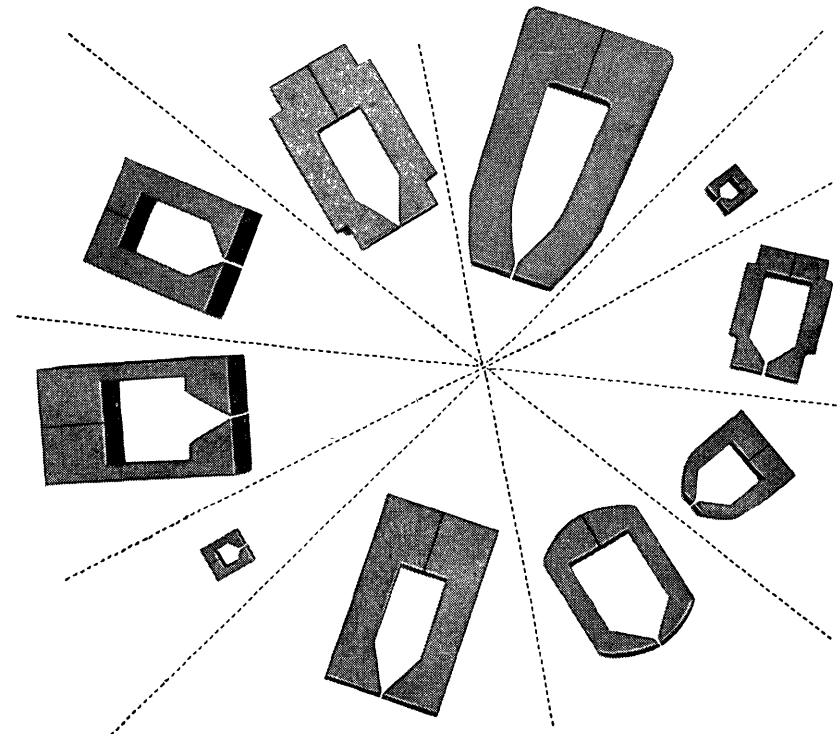

for
MAXIMUM PERMEABILITY
and
TIGHTEST TOLERANCES:

ferrite recording head cores

for electronic computer memory drums ... by FXC

The specially manufactured ferrite material of FXC recording head cores (Ferroxcube 3C, 101, 3C2 and 3E formulations) gives extremely high working permeability. Exclusive Ferroxcube machining techniques permit unprecedentedly close-tolerance air gaps and outstandingly fine finish, exceeding the most exacting computer requirements. There is a Ferroxcube applications engineer ready to analyze with you your own specialized needs and give his recommendations.

Write for literature describing standard sizes available from stock, exact permeability values and number of turns required for any given inductance.

FERROXCUBE CORPORATION OF AMERICA
50 East Bridge Street, Saugerties, New York

Manufacturers of ferrite cores for recording heads, magnetic memories, TV flyback transformers, pulse transformers, filters, inductors and high frequency shields and power transformers.

Annual Index

[Continued from page 25]

Fall-out, "Special Computer Predicts Fall-Out," (News Note), 6/7 (July), 3
Ferguson, W. Eugene, "The Role of Computers in High School Science Education — II," 6/8 (Aug.), 16
Ferranti Electric, Inc., "Lattice Networks for Digital Storage," 6/5 (May), 19
Ferroxcube Corp. of America, "Magnetic Recording Heads," 6/2 (Feb.), 42
Fiedler, Edgar R., and David R. Kennedy, "A Survey of Users of the IBM-650 Computer," 6/10 (Oct.), 10
"Fifty Ton Milling Machine Controlled by Coding Tape," (News Item), 6/6 (June), 94
"Films Introducing Electronic Data Processing Machines," Henry B. Ramsey, Jr., (in Forum), 6/10 (Oct.), 26
Foreign subscriptions, "Fifty-three Foreign Subscriptions At Once," (in The Editor's Notes), 6/3 (Mar.), 38
Forrester, Jay W., "Social and Public Relations' Responsibilities of the Computer Industry," 6/1 (Jan., Part II), 52
Forsythe, George E., "The Role of Computers in High School Science Education — I," 6/8 (Aug.), 15
Forum — SEE specific author, subject, or title
"Fourth Conference on High Speed Computers, Baton Rouge, March 1957," by Charles W. Barnett (in Forum), 5/12 (Dec. 1956), 32
Frank, Werner L., "Mathematical Subroutines for the Univac Scientific Computer — A Survey," 6/9 (Sept.), 10
Front cover: "Analog Computer in Use for Design of Instruments," (in the Editor's Notes), 6/10 (Oct.), 3;
"Leprechaun," 6/7 (July), 1;
"Master Control Room at a New Oil Refinery," 6/11 (Nov.), 1, 3;
"Programmed Component Assembly System," 6/9 (Sept.), 1, 3;
"Spacistor," 6/8 (Aug.), 1, 3

G: Garfield, Eugene, "Information About Computers and Their Applications," (in Forum), 6/2 (Feb.), 4
Gingold, Oliver J., "Office Equipment Outlook," 6/3 (Mar.), 8
Glantz, Herbert T., "Reliability in Business Automatic Data Processing," 6/5 (May), 20
Glossaries, "On Glossaries — And Malapropisms," by Alston S. Householder, 6/4 (Apr.), 33
"Glossary of Computer Terms: Comments," from Teruhiko Bessho (in Forum), 5/12 (Dec. 1956), 30
Good, I. J., "Variable-Length Multiplication," (in Forum), 6/2 (Feb.), 54
Greenfield, Harry I., "An Economist Looks at Data Processing," 6/10 (Oct.), 18
Grey, Louis D., "Cam Profile Design With the Univac 120," 6/4 (Apr.), 10
"Group Behavior of Robots," by Manfred Kochen, 6/3 (Mar.), 16
Guignon, V., "A New Idea in Component Supply," 6/5 (May), 19

H: Hattery, Lowell H., and Charles A. Phillips, "A Survey Course in Automatic Data Processing Systems," 6/7 (July), 12
Hewitt, Leland, and Ed Burnett, "The Market for Computers in Banking: Report No. 2," 6/9 (Sept.), 6

[Please turn to page 30]

INDUSTRY NEWS NOTES

ESSO CUBA REFINERY USES FISCHER & PORTER ANALOG COMPUTER-LOGGER

ESSO'S NEW catalytic-cracker refinery at Belot, Cuba features automatic data logging, coupled with a computer. The data logger, or log sheet printer, is conventional equipment in refinery operations, but the analog computer coupled with it, in a system made by Fischer & Porter, is considered by petroleum engineers to be a step along the road to computer control.

Data loggers have occasionally included some computing. But each item recorded on the loggers came generally from an individual measurement.

This system measures 101 process variables hourly in analog form, and makes them available in digital readout. It also feeds some of the measurements, reported in analog form, into an automatically programmed general purpose analog computer. This computer utilizes the basic information about process variables to solve 11 basic equations. The solutions are printed out in digital form as "true" or computed values, and serve as convenient operating guides in determining the efficiency of the process.

In many respects, such operating guides, according to Esso research engineers, are of more significance to the process operator than the measurable variables available. From a data logger, such guides can easily be computed, but they require time, and the aid of a technical observer.

The "operating guides" selected for automatic processing, for better control of the Belot cracking plant, are:

1. Carbon burning rate.
2. Catalyst circulation rate.
3. Catalyst-flow to oil-flow ratio.
4. Ratio of feed to reactor catalyst holdup. (How long the oil remains in contact with catalyst.)
5. 430 degree Fahrenheit vapor temperature conversion. (How much feed stock is being turned into gasoline.)
6. Percent weight of hydrogen in coke. (Measures oil lost with coke; indicates efficiency of stripping action.)
7. Percent weight of carbon made out of total feed. (Indicates fixed gases in relation to gasoline.)
8. Heat duty of top pump-around system. (Measures heat removal.)
9. Heat duty of mid pump-around system.
10. Regenerator superficial velocity. (Velocity of gas as measure of catalytic recovery.)
11. Reactor superficial velocity.

FRONT COVER: MAGNETIC CORE MEMORY PLANE

The front cover of this issue shows a computer component, a magnetic core memory plane. This is an array of 4096 small ferrite doughnuts, each of which can be magnetically polarized in either one of two directions, thus storing a one or a zero. Because these magnetic cores are supported by the bare wires which "write" in them and "read" from them, and the wires are pulled taut, the array becomes a plane. Each core is 25 mils thick, and has an inner diameter of 50 mils and an outer diameter of 80 mils. 820 milliamperes of current are sufficient to operate this memory. The cores and the memory plane are made by General Ceramics, Keasbey, N.J.

SYMPOSIUM: THINKING MACHINES OF THE FUTURE

Research Session on Information Processing
at the AIEE Winter Meeting
Thursday Afternoon, February 6, 1958
Hotel Statler, New York, N.Y.

The American Institute of Electrical Engineers has invited three speakers to explore the basic concept of information and the use of computers for conveying, digesting, and processing information so as to optimize certain controlled processes, or bypass human operations between the stage of concept and the stage of production.

The session will be addressed by Dr. J. B. Wiesner, Massachusetts Institute of Technology; Dr. Simon Ramo, Ramo-Wooldridge Corporation; and Dr. C. R. DeCarlo, International Business Machines Corporation.

The session is sponsored jointly by the Research Committee, the Computing Devices Committee, the Communication Theory Committee, and the Data Communication Committee of the AIEE.

IBM GROWTH

INTERNATIONAL BUSINESS MACHINES as of April 1957 had six million square feet of manufacturing, engineering, and educational facilities; new facilities under construction totaled 2.8 million square feet, all scheduled for completion by early 1958. New plants of the Data Processing Division have gone into production this year at Rochester, Minn.; San Jose, Calif.; and Burlington, Vt., so that the division now has five plants. The company's Time Equipment Division has announced the first IBM small-scale computer. Designed mainly for engineering applications, the new computer is expected to find a market in business as well. The bulk of IBM's defense work, in the Military Products Division, is in the computer field, consisting of the SAGE electronic air warning system, and the BRANE, a bombing and navigational system for installation in the B-52 Strato-fortress. IBM World Trade Corp. is tooling up for production of large-scale general purpose digital computers in France and Germany.

THE COMPUTER DIRECTORY AND BUYERS' GUIDE, 1958

is the June, 1958, issue of COMPUTERS AND AUTOMATION. We plan that it will be printed by letterpress, and will contain at least 75 pages. It will hold more information than last year's directory, which contained over 700 Organization entries and over 1300 Product and Service entries.

BE SURE TO SEND US YOUR ENTRIES.

Write us for information:

COMPUTERS AND AUTOMATION

815 Washington Street
Newtonville 60, Mass.

Annual Index

[Continued from page 29]

"High School Science Education," by Richard W. Melville, 6/1 (Jan., Part II), 55
Hilberry, Clarence B., "The Computer's Challenge to Education," 5/12 (Dec. 1956), 16
Householder, Alston S.: "Education for Automation," 6/1 (Jan., Part II), 51; "Making Mathematicians Interesting," 6/10 (Oct.), 3; "On Glossaries — And Malapropisms," 6/4 (Apr.), 33
Houston, Texas: "Meeting of Association for Computing Machinery, Houston, Tex., June 19 to 21, 1957, Program, Titles, and Abstracts," 6/7 (July), 18; "Second National Simulation Conference, Houston, Tex., April 11-13, 6/3 (Mar.), 37
Hughes Aircraft Co., "Council Formed by Schools and Industry for Improving Science Instruction," (in Forum), 6/9 (Sept.), 14
Hughes Aircraft Co., "New Air-To-Air Guided Missile," 6/3 (Mar.), 14
"Hughes to Give Fellowships to 200 in Science," Hughes Aircraft Co., 6/1 (Jan., Part II), 63

I: IBM Corp., "Electric Typewriter Input-Output for Computers," 6/2 (Feb.), 43
"IBM Electronic Data Processing Operations in the Midwest," Robert L. Fara, (in Forum), 5/12 (Dec. 1956), 33
IBM-650 Computer, "A Survey of Users of the IBM-650 Computer," by Edgar R. Fiedler and David R. Kennedy, 6/10 (Oct.), 10
IBM, "The Service Bureau," 6/3 (Mar.), 31
"IBM Yorktown Research Center," IBM Corp., 6/1 (Jan., Part I), 31
"IBM's Programmed Component Assembly System," by Neil D. Macdonald, 6/9 (Sept.), 9
Index, Dec. 1955 to Nov. 1956, 5/12 (Dec. 1956), 36
"Indexing for Rapid Random Access Memory Systems," by Arnold I. Dumey, 5/12 (Dec. 1956), 6
"Industry and the Automated Future: Problems Along the Way," by John Diebold, 6/2 (Feb.), 14
"Industry News Notes," (in The Editor's Notes), 6/8 (Aug.), 3
"Industry News Notes," by Ed Burnett: 6/8 (Aug.), 26; 6/9 (Sept.), 22; 6/10 (Oct.), 24; 6/11 (Nov.), 24
"Information About Computers and Their Applications" (in Forum), 6/2 (Feb.), 4
"Information retrieval, "Symposium on Systems for Information Retrieval," Western Reserve University, 6/3 (Mar.), 29
"Instruments and Regulators Conference, Chicago, April 7-10, 1957," The American Society of Mechanical Engineers, 6/3 (Mar.), 47
"International Conference on Operational Research," (in Forum), 6/3 (Mar.), 42
Introduction to computers, "A Pictorial Introduction to Computers," 6/6 (June), 49
"Introduction to Who's Who in the Computer Field, 1956-57," 6/E1 (Extra Issue), 6
IRE National Convention, March, 1957, New York, "Titles and Abstracts of Papers Bearing on Computers and Data Processors," 6/5 (May), 30

K: Kennedy, David R., and Edgar R. Fiedler, "A Survey of Users of the IBM-650 Computer," 6/10 (Oct.), 10
Kochen, Manfred, "Group Behavior of Robots," 6/3 (Mar.), 16
Koontz, Monroe M., "Supplementing Electronic Equipment With a Modern Communications System," 6/4 (Apr.), 12
Krick, Irving P., "Univac Pinpoints the Weather," 6/9 (Sept.), 8
L: Labiner, Theodore, "A Big Decision: Lease or Buy?", 6/10 (Oct.), 6
Lange, A., "Education and Computers — Discussion," 6/3 (Mar.), 30
Language translation, "On Language Translation," by A. F. R. Brown and the Editor, (in The Editor's Notes), 6/9 (Sept.), 3
"Larger Rapid Memory for the IBM 704," (New Products & Ideas), 6/7 (July), 25
"Lattice Networks for Digital Storage," by R. H. Davies, Ferranti Electric Co., 6/5 (May), 19
"Leprechaun: An Automatic Digital Computer the Size of a Television Set," 6/7 (July), 1, 10
"Letterpress," (in The Editor's Notes), 6/7 (July), 6
Library documents, "Automatic Search of Library Documents," by S. Richard Moyer, 6/5 (May), 24
Lockheed Missile Div., "Programming with SOAP (Symbolic Optimum Assembly Programming)," 6/4 (Apr.), 9
"Logical and Combinatorial Problems in Computer Design," by Robert Mc Naughton, 6/1 (Jan., Part I), 30
Los Angeles Chapter, Association for Computing Machinery, Statler Hotel, Los Angeles, March 1, 1957, (in Forum), 6/2 (Feb.), 40
Los Angeles, Calif.: "1957 Western Joint Computer Conference, Los Angeles, Feb. 26-28, 1957, and Association for Computing Machinery Symposium, March 1, 1957, Program & Titles," 6/1 (Jan., Part I), 28;
"Western Joint Computer Conference, Los Angeles, Feb. 26 to Feb. 28, 1957, Program, Titles, and Abstracts," 6/4 (Apr.), 25
Louisiana State University, "Fourth Conference on High Speed Computers, Baton Rouge, March, 1957," by Charles W. Barnett, 5/12 (Dec. 1956), 32

M: Macdonald, Neil D.: "Computation for an Earth Satellite," 6/2 (Feb.-, 6; "IBM's Programmed Component Assembly System," 6/9 (Sept.), 9; "The Project STRETCH Computer (IBM)," 6/4 (Apr.), 8; "The Spacistor — A New Kind of Semiconductor Amplifier," 6/8 (Aug.), 6
Machine accounting, "Courses in Machine Accounting and Electronic Data Processing," from Denis S. Philips (in Forum), 6/10 (Oct.), 26
"Magazines on 'Computology,'" (in Forum), by Samuel J. M. England, 6/5 (May), 37
Magnetic core memory, "Transistorized Magnetic Core Memory," by Bell Telephone Laboratories, 6/1 (Jan., Part I), 26
"Magnetic Recording Heads," Ferroxcube Corp. of America, 6/2 (Feb.), 42
Mails, "The United States Mail — Field for Automatic Processing of Information," (in Forum), 6/5 (May), 38
"The Maker of Computing Machines," by George R. Price, 6/10 (Oct.), 29
"Making Mathematicians Interesting," by Alston S. Householder, 6/10 (Oct.), 3
Margolin, R. J., "Variable-Length Multiplication," 6/8 (Aug.), 9
"The Market for Analog Computers" in the oil industry, 6/11 (Nov.), 18
"The Market for Computers in Banking: Report No. 2," by Ed Burnett and Leland Hewitt, 6/9 (Sept.), 6
"The Market for Computers in the Oil and Natural Gas Industry (Report No. 3)," by Ed Burnett, 6/11 (Nov.), 10
Market Survey, "Computer Market Survey — Report No. 1," by Edmund C. Berkeley, 6/5 (May), 8
"Master Control Room at a New Oil Refinery," 6/11 (Nov.), 1, 3
Master file, "Computer People: Master File," by Edmund C. Berkeley, (in Forum), 6/2 (Feb.), 50
"Mathematical Subroutines for the Univac Scientific Computer — A Survey," by Werner L. Frank, 6/9 (Sept.), 10
Mathematicians, "Making Mathematicians Interesting," by Alston S. Householder, (in Forum), 6/10 (Oct.), 3
McNaughton, Robert, "Logical and Combinatorial Problems in Computer Design," 6/1 (Jan., Part I), 30
Meeting — SEE: Conference
"Meeting of Association for Computing Machinery, Houston, Texas, June 19 to 21, 1957, Program, Titles, and Abstracts," 6/7 (July), 18
Meier, Richard L., "Self-Repairing and Reproducing Automata," 5/12 (Dec. 1956), 10
Melville, Richard W., "High School Science Education," 6/1 (Jan., Part II), 55
Memory, "Transistorized Magnetic Core Memory," by Bell Telephone Laboratories, 6/1 (Jan., Part I), 26
Michigan, University of, "Courses in Automatic Control," 6/3 (Mar.), 25
"Miniature Tape Recorder," North American Instruments, Inc., 6/3 (Mar.), 12
Missiles, "The Effect of Missiles on Computers," 6/8 (Aug.), 3
"'Mobidic' Being Developed by Sylvania Electric," 6/7 (July), 24
"Modern Large Scale Computer System Design," by Walter F. Bauer, 6/1 (Jan., Part I), 8
Moyer, S. Richard, "Automatic Search of Library Documents," 6/5 (May), 24
Multiplication, "Variable-Length Multiplication," by I. J. Good (in Forum), 6/2 (Feb.), 54
Multiplication, "Variable-Length Multiplication," by R. J. Margolin, (in Forum), 6/8 (Aug.), 9

N: "A Name," (in The Editor's Notes), 6/7 (July), 7
National Bureau of Standards, "Syntax Patterns in English Studied by Electronic Computer," 6/7 (July), 15
"New Patents," by Raymond R. Skolnick; 5/12 (Dec. 1956), 31; 6/1 (Jan., Part I), 42; 6/2 (Feb.), 38; 6/3 (Mar.), 15; 6/5 (May), 36; 6/7 (July), 34; 6/8 (Aug.), 32; 6/9 (Sept.), 32 6/10 (Oct.), 32; 6/11 (Nov.), 32
"New Air-To-Air Guided Missile," Hughes Aircraft Co., 6/3 (Mar.), 14
"New Computer Developments Around the World," by Everett S. Calhoun, 6/2 (Feb.), 10
"New Computers: A Report from the Manufacturers," Association for Computing Machinery, Los Angeles Chapter Meeting, Los Angeles, Mar. 1, 1957, 6/4 (Apr.), 30
"New Hourly-Computed Index of Stock Prices," 6/7 (July), 24

[Please turn to page 32]

NEW PATENTS

RAYMOND R. SKOLNICK, Reg. Patent Agent
Ford Inst. Co., Div. of Sperry Rand Corp.
Long Island City 1, New York

THE following is a compilation of patents pertaining to computers and associated equipment from the "Official Gazette of the United States Patent Office," dates of issue as indicated. Each entry consists of: patent number / inventor(s) / assignee / invention. Printed copies of patents may be obtained from the U.S. Commissioner of Patents, Washington 25, D.C., at a cost of 25 cents each.

Sept. 17, 1957: 2,806,353 / Louis N. Grafinger, Paramus, N.J., and Bernard J. O'Connor, Tuckahoe, N.Y. / Bendix Aviation Corp., Teterboro, N.J. / A mach number computer.

2,806,648 / Joseph D. Rutledge, Darling, Pa. / Sperry Rand Corp., New York, N.Y. / A half-adder for computing circuit.

2,806,950 / Robert Carbrey, Madison, N.J. / Bell Telephone Lab., Inc., New York, N.Y. / A circulating pulse decoder.

2,806,986 / Hans P. Luhn, Armond, N.Y. / I.B.M. Corp., New York, N.Y. / A high performance position servo system.

2,807,005 / James A. Weidenhammer, Poughkeepsie, N.Y. / I.B.M. Corp., New York, N.Y. / A device for converting and reinscribing magnetically recorded data.

2,807,015 / Robert J. Shank, Encino, Calif. / Hughes Aircraft Co., Del. / A range voltage generating circuit for automatic range tracking.

2,807,017 / Richard N. Close, Mineola, N.Y. / U.S.A. by Sec. of War / An aircraft borne radio computer system.

Sept. 24, 1957: 2,807,376 / Georges X. Lens, Antwerp, Belgium / International Standard Electric Corp., New York, N.Y. / A combined code recorder and selector.

2,807,413 / Edward J. Rabenda, Poughkeepsie, N.Y. / I.B.M. Corp., New York, N.Y. / An electronic decimal storage system.

2,807,414 / Louis A. Howard, U.S. Navy / I.B.M. Corp., New York, N.Y. / A machine for reading each card of an array of record cards each having a leading edge with columns of index points containing representations of data in the form of light transparent areas disposed parallel thereto.

2,807,415 / Robert I. Roth, Briarcliff Manor, N.Y. / I.B.M. Corp., New York, N.Y. / A record perforation analyzing means.

2,807,664 / Harry Kleinberg, Pensauken, and John S. Baer, Woodbury, N.J. / Radio Corp. of America, Del. / A system for recognizing information encoded in groups of binary-valued digital positions on a storage medium and for printing said information.

2,807,715 / Arnold Lesti, Nutley, N.J. / I.T.T. Corp., Maryland / A decoder for pulse code modulation systems.

2,807,716 / Floyd G. Steele, La Jolla, Calif. / Digital Control Systems, Inc., La Jolla, Calif. / A correlation of flip-flop and diode gating circuitry.

2,807,717 / Robert C. Paulsen, West Caldwell, N.J. / I.B.M. Corp., New York, N.Y. / A measuring and indicating system.

2,807,728 / Tom Kilburn, Manchester, Frederic C. Williams, Timperley, and Eric R. Laithwaite, Preston, Eng. / National Research Development Corp., London, Eng. / A digital data storage system.

Oct. 1, 1957: 2,808,202 / William C. Hahn, Scotia, N.Y. / General Electric Co., New York / A carry unit for binary digital computing devices.

2,808,203 / Bernard H. Geyer, Jr., Syracuse, and Curtis D. Cockburn, Baldwinsville, N.Y. / General Electric Co., New York / A binary system shifting register.

2,808,204 / Bernard H. Geyer, North Syracuse, and Charles R. Wayne, Syracuse, N.Y. / General Electric Co., New York / A binary digital computing apparatus.

2,808,205 / Francois H. Raymond, Le Vésinet, and Roger R. Dussine, Paris, Fr. / Societe d'Electronique et d'Automatisme, Courbevoie, Fr. / An electric adder-subtracter device.

[Please turn to page 34]

MATHEMATICIANS 1 TO 5 YEARS' EXPERIENCE INTERESTED IN

HOW MATHEMATICAL ANALYSIS CUTS LEAD TIME IN AIRBORNE REACTOR DEVELOPMENT AT GENERAL ELECTRIC



Mathematical methods are some of the strongest supports for General Electric's Aircraft Nuclear Propulsion Program. Management estimates that the mathematician's insight can cut the time required to bring a power plant from preliminary design to product stage as much as two years!

As this program to create nuclear power systems for aircraft progresses, problems become more complex, and the time element more pressing. The result is greater reliance on numerical analysis. This has opened positions for mathematicians in assignments involving:

- **Thermodynamics**
- **Shield Physics**
- **Nuclear Instrumentation**
- **General Mathematical Analysis**
- **Air Cycle Analysis**
- **Reactor Analysis**
- **Numerical Analysis**
- **Metallurgy**
- **Theoretical Physics**

Is Nuclear Experience Necessary? No — not for a majority of current openings at General Electric's Aircraft Nuclear Propulsion Dept. In-plant seminars and a Master's Degree Program, on full tuition refund basis, provide essential nuclear theory and technology. A FEW POSITIONS REQUIRE A SPECIALIST'S KNOWLEDGE OF NUCLEONICS.

Location Cincinnati, Ohio, known as an engineering center and a fine place to live. Excellent housing available. Fine schools. A few positions in Idaho Falls, Idaho.

●

PUBLICATION OF TECHNICAL PAPERS IS ENCOURAGED

Please write in confidence to Mr. J. R. Rosselot. You will receive a prompt reply and a copy of "Aircraft Nuclear Propulsion" by Dr. M. C. Leverett, Manager ANP Development Laboratory.

●

AIRCRAFT NUCLEAR PROPULSION DEPT.

GENERAL ELECTRIC

P.O. Box 132, Cincinnati 15, Ohio

Annual Index

[Continued from page 30]

"A New Idea in Component Supply," by V. Guignon, 6/5 (May), 19
New Products and Ideas — SEE: specific company, subject, or title
"New Products and Ideas," (in The Editor's Notes), 6/4 (Apr.), 4
"A New Radar Device for Corrected Mapping," Fairchild Controls Corp., 6/5 (May), 19
"The Nine Billion Names of God," by Arthur C. Clarke, 6/2 (Feb.), 24
North American Instruments, Inc., "Miniature Tape Recorder," 6/3 (Mar.), 12
"Numerical Analysis Course," Clemson College, 6/3 (Mar.), 45

O: "Objective Measures of Education," by Donald Truitt, 6/1 (Jan., Part II), 60
"Office Equipment Outlook," by Oliver J. Gingold, 6/3 (Mar.), 8
"Oil and Natural Gas: The Magnitude of the Industry," by Ed Burnett, 6/11 (Nov.), 15
"The Oil and Natural Gas Industry," (in The Editor's Notes), 6/11 (Nov.), 3
Oil industry, "Computer Applications in the Oil Industry: Selected Typical Examples," 6/11 (Nov.), 19
Oil industry: "The Market for Analog Computers," 6/11 (Nov.), 18
"The Market for Computers in the Oil and Natural Gas Industry (Report No. 3)," by Ed Burnett, 6/11 (Nov.), 10
"The Refinery of the Year," 6/11 (Nov.), 21
"Some Uses of Computers in the Oil and Gas Industry," 6/11 (Nov.), 14
"On Glossaries — And Malapropisms," by Alston S. Householder, (in Forum), 6/4 (Apr.), 33
"On Language Translation," by the Editor and A. F. R. Brown, 6/9 (Sept.), 3
Operations research, "International Conference on Operational Research," 6/3 (Mar.), 42
Organizations — SEE: Roster of Organizations
Output, "Swift Output: 10,000 Characters per Second," Stromberg-Carlson, 5/12 (Dec. 1956), 28

P: "Pan American World Airways— Requirements for Automatic Data Processing," by Daniel B. Priest, 6/7 (July), 7
Patents — SEE: "New Patents"
Pekelis, V., "Electronic Computing Machines in the National Economy of the Soviet Union," 6/2 (Feb.), 22
Philco Corp., "Transistor Arithmetic Control Unit," 6/3 (Mar.), 11
Philips, Denis S., "Courses in Machine Accounting and Electronic Data Processing," (in Forum), 6/10 (Oct.), 26
Phillips, Charles A., and Lowell H. Hattery, "A Survey Course in Automatic Data Processing Systems," 6/7 (July), 12
"A Pictorial Introduction to Computers," 6/6 (June), 49
Poultry feed, "Computer Applications to Poultry Feed," by Wilbur E. Clark (in Forum), 6/8 (Aug.), 9
"Preprints and Publication," by Eric A. Weiss, 6/8 (Aug.), 3
Price, George R., "The Maker of Computing Machines," 6/10 (Oct.), 29
Priest, Daniel B., "Pan American World Airways—Requirements for Automatic Data Processing," 6/7 (July), 7
"Printing by Letterpress and Other Changes," (in The Editor's Notes), 6/6 (June), 6
"Products and Services for Sale or Rent: Buyers' Guide for the Computer Field" (cumulative), 6/6 (June), 40
"Products and Services for Sale or Rent in the Computer Field — List of Headings," 6/6 (June), 41
Programmed component assembly system: "Front Cover," (in The Editor's Notes), 6/9 (Sept.), 3
"IBM's Programmed Component Assembly System," by Neil D. Macdonald, 6/9 (Sept.), 9
"Programming With SOAP (Symbolic Optimum Assembly Programming)," Lockheed Missiles Div., 6/4 (Apr.), 9
"The Project STRETCH Computer (IBM)," by Neil D. Macdonald, 6/4 (Apr.), 8
Public relations, "Social and Public Relations' Responsibilities of the Computer Industry," 6/1 (Jan., Part 2), 52
"Push-Button Air-Ground Communication," 6/7 (July), 25

R: Radar mapping, "A New Radar Device for Corrected Mapping," Fairchild Controls Corp., 6/5 (May), 19
Ramsey, Henry B., Jr., "Films Introducing Electronic Data Processing Machines," 6/10 (Oct.), 26
Random access memory, "Indexing for Rapid Random Access Memory Systems," by Arnold I. Dumey, 5/12 (Dec. 1956), 6
Reac Analog Computer, "The Solution of Boundary Value Problems on a Reac Analog Computer," 6/2 (Feb.), 26
Reader's Digest, "The United States Mails — Field for Automatic Processing of Information," 6/5 (May), 38
Readers, "What Readers Say About 'Computers and Automation,'" 6/2 (Feb.), 44
"Reference Information," (in The Editor's Notes), 6/3 (Mar.), 38
"The Refinery of the Year," oil industry report, 6/11 (Nov.), 21
"Reliability in Business Automatic Data Processing," by Herbert T. Glantz, 6/5 (May), 20
"The Reliability of a Sage System Prototype," (New Products and Ideas), 6/9 (Sept.), 28
"Remote Control for a Vehicle," (New Products and Ideas), 6/7 (July), 24
"Robot Machinist," 6/6 (June), 94
"Robots and Automata: A Short History," by James T. Culbertson, 6/3 (Mar.), 32
"Robots and Automata: A Short History (Bibliography)," by James T. Culbertson, 6/4 (Apr.), 20
Robots, "Group Behavior of Robots," by Manfred Kochen, 6/3 (Mar.), 16
"The Role of Computers in High School Science Education," by George E. Forsythe, W. Eugene Ferguson, and DeForest L. Trautman, 6/8 (Aug.), 15
"Roster of Organizations in the Computer Field" (cumulative), 6/6 (June), 9

S: Satellite, "Computation for an Earth Satellite," by Neil D. Macdonald, 6/2 (Feb.), 6
"The Satellite Sputnik," (in The Editor's Notes), 6/11 (Nov.), 3
"Satellites and Computers — and Psychology," by Edmund C. Berkeley, 6/11 (Nov.), 6
Schrimpf, Henry W., "The Datamatic 1000 Computer," 6/4 (Apr.), 8
"Science Fiction About Computers," (in The Editor's Notes), 6/8 (Aug.), 3
Science Fiction: "The Maker of Computing Machines," by George R. Price, 6/10 (Oct.), 29
"The Nine Billion Names of God," by Arthur C. Clarke, 6/2 (Feb.), 24
"Second National Simulation Conference, Houston, Tex., April 11-13, 1957" 6/3 (Mar.), 37
"Self-Repairing and Reproducing Automata," by Richard L. Meier, 5/12 (Dec. 1956), 10
Semiconductor amplifier, "The Spacistor — A New Kind of Semiconductor Amplifier," by Neil D. Macdonald, 6/8 (Aug.), 6
"The Service Bureau," IBM, 6/3 (Mar.), 31
Simulation conference — SEE: Second National Simulation Conference
"Simulation of a Liquid Level Control System with an Analog Computer," by Charles W. Worley, 6/2 (Feb.), 30
Simulator, "A Three-Axis Simulator for Controlled Flight Test of Airborne Systems," Bendix Computer Div., 6/5 (May), 18
"Simulators for Training Airplane Crews," American Airlines, 6/3 (Mar.), 10
Skolnick, Raymond R., "New Patents" — SEE: "New Patents"
"Social and Public Relations' Responsibilities of the Computer Industry," by Jay W. Forrester, 6/1 (Jan., Part II), 52
"The Solution of Boundary Value Problems on a Reac Analog Computer," by M. Yanowitch, 6/2 (Feb.), 26
"Some Uses of Computers in the Oil and Gas Industry," 6/11 (Nov.), 14
Soviet Union, education, "Three Comparisons," (in The Editor's Notes), 6/1 (Jan., Part 2), 50
Soviet Union: "Electronic Computing Machines in the National Economy of the Soviet Union," by V. Pekelis, 6/2 (Feb.), 22;
"Fifty-Three Foreign Subscriptions at Once," (in The Editor's Notes), 6/3 (Mar.), 38
Spacistor, "Front Cover: Spacistor," (in The Editor's Notes), 6/8 (Aug.), 1, 3
"The Spacistor — A New Kind of Semiconductor Amplifier," by Neil D. Macdonald, 6/8 (Aug.), 6
"Special Computer Predicts Fall-Out," 6/7 (July), 3
Sputnik, "Satellites and Computers—and Psychology," by Edmund C. Berkeley, 6/11 (Nov.), 6
"The Satellite Sputnik," (in The Editor's Notes), 6/11 (Nov.), 3
Stein, P., and S. Ulam, "Experiments in Chess on Electronic Computing Machines," 6/9 (Sept.), 14
Stromberg-Carlson, "Swift Output: 10,000 Characters Per Second," 5/12 (Dec. 1956), 28
"Summer Computer Courses," 6/6 (June), 93
Summerfield, Arthur E., "The United States Mails — Field for Automatic Processing of Information," 6/5 (May), 38
"Supermendur — An Improved Magnetic Alloy," Bell Telephone Laboratories, 6/3 (Mar.), 14
"Supplementing Electronic Equipment With a Modern Communications System, by Monroe M. Koontz, 6/4 (Apr.), 12
"A Survey Course in Automatic Data Processing Systems," by Lowell H. Hattery and Charles A. Phillips, 6/7 (July), 12

"Survey — Estimate of the Computer Market," form of questionnaire, 6/3 (Mar.), 39; 6/5 (May), 40
"A Survey of Users of the IBM-650 Computer," by Edgar R. Fiedler and David R. Kennedy, 6/10 (Oct.), 10
"Surveys — Estimate of the Market for Computers and Data Processors," (in The Editor's Notes), 6/3 (Mar.), 6
"Swift Output: 10,000 Characters Per Second," Stromberg - Carlson, 5/12 (Dec. 1956), 28
Switching, "Symposium on the Theory of Switching, Cambridge, Mass., April 2-5, 1957," 6/3 (Mar.), 48
Symposium — SEE also Conferences
"Symposium on Systems for Information Retrieval," Western Reserve University, 6/3 (Mar.), 29
"Symposium on Systems for Information Retrieval, Western Reserve University School of Library Science, Cleveland, Ohio, April 15-17, 1957, Program," 6/4 (Apr.), 31
"Symposium on the Theory of Switching, Cambridge, Mass., April 2-5, 1957," 6/3 (Mar.), 48
"Syntax Patterns in English Studied by Electronic Computer," by National Bureau of Standards, 6/7 (July), 15
System design, "Modern Large Scale Computer System Design," by Walter F. Bauer, 6/1 (Jan., Part I), 8

T: "A Three-Axis Simulator for Controlled Flight Test of Airborne Systems," Bendix Computer Div., 6/5 (May), 18
"Three Comparisons," (in The Editor's Notes), 6/1 (Jan., Part 2), 50
Toledo, Raymond, "Comments on 'Computers and Automation,'" 6/11 (Nov.), 3
"Transistor Arithmetic Control Unit," Philco Corp., 6/3 (Mar.), 11
"Transistorized Magnetic Core Memory," by Bell Telephone Laboratories, 6/1 (Jan., Part I), 26
Trautman, DeForest L., "The Role of Computers in High School Science Education — III," 6/8 (Aug.), 15
Truitt, Donald, "Education and Computers — Discussion," (in Forum), 6/3 (Mar.), 30;
"Objective Measures of Education," 6/1 (Jan., Part 2), 60
Types of automatic computing machinery, list (cumulative), 6/3 (Mar.), 22
Types of components of automatic computing machinery, list (cumulative), 6/3 (Mar.), 24

U: Ulam, S., and P. Stein, "Experiments in Chess on Electronic Computing Machines," 6/9 (Sept.), 14
Underwood Corp., "Electron Predictions by Electronic Computer," 5/12 (Dec. 1956), 29
"The United States Mails — Field for Automatic Processing of Information," (in Forum), 6/5 (May), 38
Univac, "Mathematical Subroutines for the Univac Scientific Computer — A Survey," by Werner L. Frank, 6/9 (Sept.), 10
Univac 120, "Cam Profile Design With the Univac 120," by Louis D. Grey, 6/4 (Apr.), 10
"Univac Pinpoints the Weather," by Irving P. Krick, 6/9 (Sept.), 8
Univ. of Michigan, "Courses in Automatic Control," 6/3 (Mar.), 25
"University of Pennsylvania Computing Center, 6/7 (July), 14
"Use of a Computer for Certain Operations of Classification," by Andrew D. Booth, 6/4 (Apr.), 18

V: "Variable-Length Multiplication," by I. J. Good, 6/2 (Feb.), 54
"Variable-Length Multiplication," by R. J. Margolin, 6/8 (Aug.), 9

W: Washington, D.C., Eastern Joint Computer Conference, December 9-13, 1957, Program, Titles, and Abstracts, 6/11 (Nov.), 26
Weather, "Univac Pinpoints the Weather," by Irving P. Krick, 6/9 (Sept.), 8
Weiss, Eric A., "Preprints and Publication," 6/8 (Aug.), 3
WESCON, "Western Electronic Show and Convention," 6/7 (July), 11
Western Joint Computer Conference, Los Angeles, Feb. 26-28, 1957; notice, 5/12 (Dec. 1956), 42; Program, Titles, and Abstracts, 6/4 (Apr.), 25
Western Joint Computer Conference, Los Angeles, Feb. 26-28, 1957, and Association for Computing Machinery Symposium, March 1, 1957, Program and Titles, 6/1 (Jan., Part 1), 28
Western Electronic Show and Convention, (in Forum), 6/7 (July), 11
Western Reserve University School of Library Science, "Symposium on Systems for Information Retrieval, Cleveland, Ohio, April 15-17, 1957, Program," 6/4 (Apr.), 31
Western Reserve University, "Symposium on Systems for Information Retrieval, 6/3 (Mar.), 29
"What Readers Say About 'Computers and Automation,'" (in Forum), 6/2 (Feb.), 44
Who's Who, "Abbreviations Used in the Who's Who," 6/E1 (Extra Issue), 14
"Who's Who in the Computer Field, 1956-57," (in The Editor's Notes), 6/E1 (Extra Issue), 7
"Who's Who in the Computer Field, 1956-57; 1. Some Statistics; 2. Supplement of New or Revised Full Entries," 6/8 (Aug.), 20
"Who's Who in the Computer Field — 1956-57 (Third edition, cumulative, information as of Dec. 20, 1956)," 6/E1 (Extra Issue), 6
Worley, Charles W., "Simulation of a Liquid Level Control System with an Analog Computer," 6/2 (Feb.), 30
Wright, J. Howard, "Fallout Computer — Some Technical Corrections," (in Forum), 6/10 (Oct.), 23
Wright, P. A. R., "Analogue Computers in Europe," (in Forum), 6/5 (May), 42

Y: Yanowitch, M., "The Solution of Boundary Value Problems on a Raec Analog Computer," 6/2 (Feb.), 26

THE COMPUTER DIRECTORY AND BUYERS' GUIDE, 1958

is the June 1958 issue of

COMPUTERS AND AUTOMATION

Be sure to send your entries to:

Directory Editor

COMPUTERS AND AUTOMATION

815 Washington Street

Newtonville 60, Mass.

...when you think of...

GE

TANTALYTIC® CAPACITORS think of

Schweber

IN STOCK—OVER 250 DIFFERENT RATINGS polar and non-polar types.

+85° Designed for high speed aircraft and missile systems where quality, long life, and small size are required.



+125° For high temperature, miniaturized high reliability. Designed for cramped quarters.

+125° Permits maximum flexibility in chassis arrangement in minimum space. High temperature, long life.



We know you will appreciate a supplier who sells TANTALUM CAPACITORS as a MAIN LINE instead of a side line! Send for our latest specially prepared GE Tantalytic bulletin by filling in coupon below.

Schweber ELECTRONICS

60 HERRICKS ROAD MINEOLA L I N Y

PIONEER 6-6520

GENTLEMEN:

PLEASE RUSH your specially prepared 1957 GE Tantalytic® Bulletin listing over 250 Tantalum Capacitors in numerical sequence by microfarads.

COMPANY NAME .....

.....

ADDRESS .....

.....

ATTENTION .....

New Patents

[Continued from page 31]

2,808,557 / John W. Smith, Cedar Rapids, Iowa / Collins Radio Company, Cedar Rapids, Iowa / A remote control servosystem.

October 8, 1957: 2,808,649 / Einard Nyyssonen, Watertown, Mass. / U.S.A. by Sec'y of the Air Force / A range computing apparatus for gynomonic maps.

2,808,983 / Albert M. Uttley, Great Malvern, Spencer W. Noble, Upper Colwall, and Ronald H. Carter, Malvern, Eng. / National Research Development Corp., London, Eng. / An electronic digital computing apparatus.

2,808,984 / Byron O. Marshall, Jr., Pittsburgh, Pa., and John D. Dillon, Melbourne, Fla. / — / A coding device.

2,808,985 / Clifford A. Shank, Redondo Beach, and Norman M. Brown, Jr., and Charles E. Ault, Los Angeles, Calif. / Garrett Corp., Los Angeles, Calif. / An angle of attack Computer.

2,808,986 / Joseph J. Stone, Jr., Clinton, Estle R. Mann, Oak Ridge, and Edward S. Bettis, Fountain City, Tenn. / U.S.A. by U.S. Atomic Energy Comm. / An electronic digital computer.

2,808,987 / Jack B. Speller, White Plains, and Frank S. Preston, Tarrytown, N.Y. / Norden-Ketay Corp., Ill. / An apparatus for generating trigonometric functions.

2,808,988 / Wilhelm Kafka, Tennenlohe-Turmberg, near Erlangen, Germany / Siemens-Schuckertwerke Aktiengesellschaft, Berlin-Siemensstadt and Erlangen, Germany / An electrical apparatus for forming products or quotients of physical magnitudes.

2,808,989 / James R. Younkin, Bartlesville, Okla. / Phillips Petroleum Co., Del. / A computer for solving simutaneous equations.

2,808,990 / Roland L. Van Allen, Alexandria, Va. / U.S.A. by Sec'y of the Navy / A polarity responsive voltage computing device.

2,809,367 / Raymond Stuart-Williams, Pacific Palisades, Calif. / Telemeter Magnetics and Electronics Corp., Los Angeles, Calif. / A magnetic core memory system.

2,809,369 / Thomas A. Feeney, Los Angeles, and Ralph D. Adams, Inglewood, Calif. / Coleman Engineering Co., Los Angeles, Calif. / An analog-to-digital converter.

APPLIED MATHEMATICIANS

and

NUMERICAL ANALYSTS

OUR rapidly expanding research program has challenging positions open for experienced and well-qualified personnel for work on analytical programs in *aerodynamics, dynamics* and *vibration, aeroelasticity,* and related fields. Also involved is the development of *digital computer techniques* related to the programs described above, employing a small high-speed computer.

If you are experienced in any of these areas and seek the opportunity of working on a diversity of industrial and military problems in both fundamental and applied fields, write to:

S. H. SIMPSON, JR.
Assistant Vice President, Dept. 2-5

SOUTHWEST RESEARCH INSTITUTE
8500 Culebra Road
San Antonio 6, Texas

ADVERTISING INDEX

Following is the index of advertisements. Each item contains: Name and address of the advertiser / page number where the advertisement appears / name of the agency if any.

Amperex Electronic Corp., Hicksville, L.I., N.Y. / Page 2 / Sam Groden, Inc.

Ampex Instrument Corp., 934 Charter St., Redwood City, Calif. / Page 8 / Boland Associates

Audio Devices, Inc., 444 Madison Ave., New York 22, N.Y. / Page 25 / Marsteller, Rickard, Gebhardt & Reed, Inc.

Bryant Chucking Grinder Co., Springfield, Vt. / Page 19 / Henry A. Loudon Advertising, Inc.

C. P. Clare & Co., 3101 Pratt Blvd., Chicago 45, Ill. / Page 10 / Reincke, Meyer & Finn

Datamatic Corp., Newton Highlands, Mass. / Page 18 / Batten, Barton, Durstine & Osborne, Inc.

Electronic Associates, Inc., Long Branch, N.J. / Page 36 / Halsted & Van Vechten, Inc.

ESC Corp., 534 Bergen Blvd., Palisades Park, N.J. / Page 5 / Keyes, Martin & Co.

Ferroxcube Corp. of America, E. Bridge St., Saugerties, N.Y. / Page 28 / Sam Groden, Inc.

General Electric Co., Aircraft Nuclear Propulsion Dept., Cincinnati, Ohio / Page 31 / Deutsch & Shea, Inc.

Radio Corp. of America, Industrial Tube Div., Harrison, N.J. / Page 11 / Al Paul Lefton Co.

Ramo-Wooldridge Corp., 5730 Arbor Vitae St., Los Angeles, Calif. / Page 35 / The McCarty Co.

Royal-McBee Corp., Data Processing Equipment Div., Port Chester, N.Y. / Page 3 / C. J. LaRoche & Co., Inc.

Southwest Research Institute, 8500 Culebra Rd., San Antonio 6, Tex. / Page 34 / —

Schweber Electronics, 122 Herricks Rd., Mineola, L.I., N.Y. / Page 33 / Vision Associates

Technical Operations, Inc., Burlington, Mass. / Page 23 / Bywords

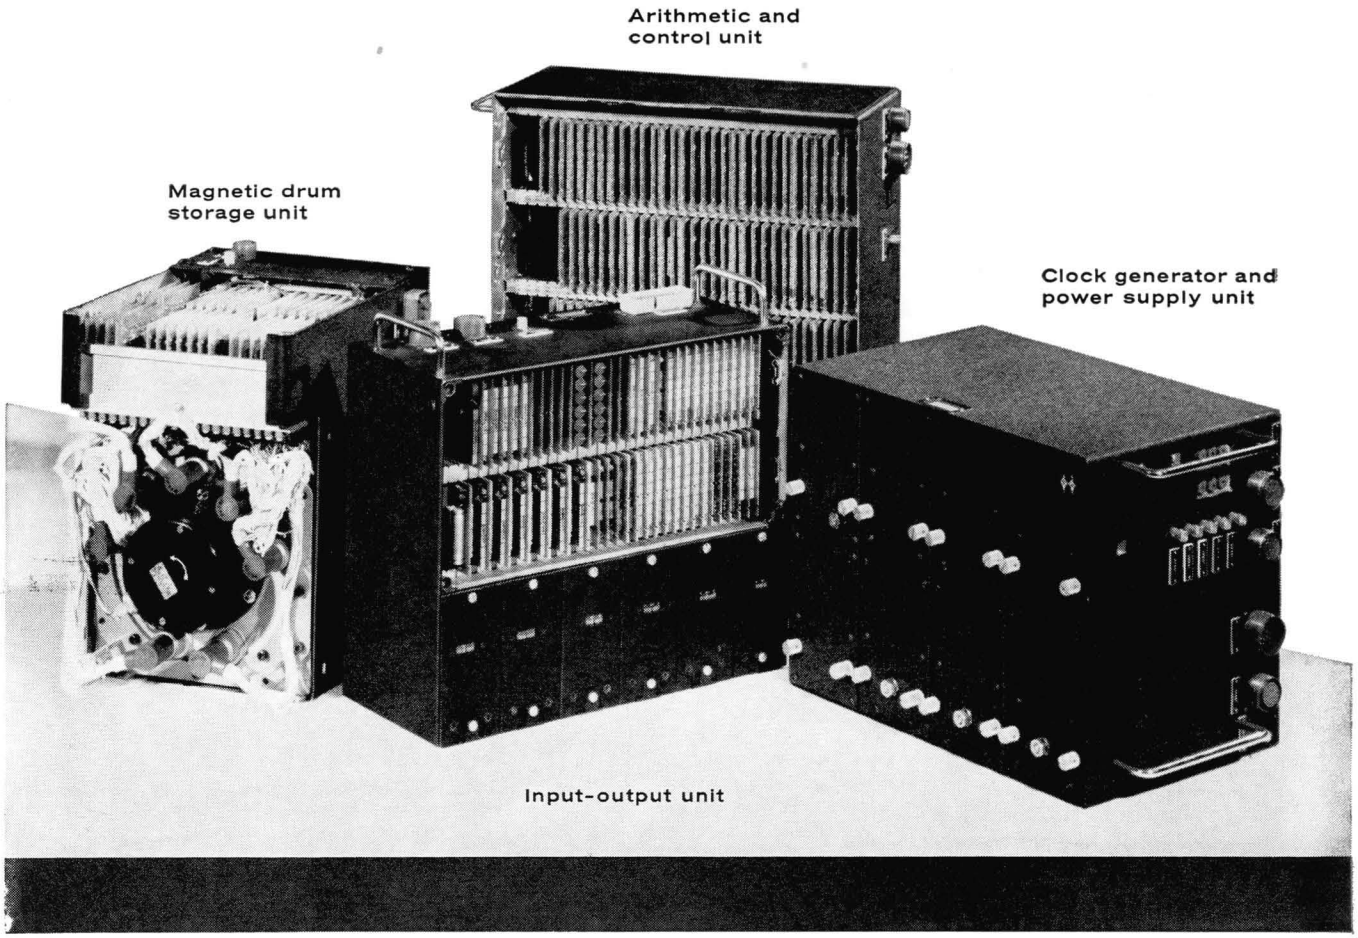

The Importance of
DIGITAL TECHNIQUES

Digital techniques constitute one of the important developments which have made possible the recent advances in computers and related equipment for computation, data processing, and industrial and military electronic control.

Digital computers for scientific computation range from small specialized units costing a few thousand dollars, to large general-purpose computers costing over a million dollars. One of these large computers is a part of the Ramo-Wooldridge Computing Center, and a second such unit is being installed early this year.

Electronic data processing for business and industry is rapidly growing based on earlier developments in electronic computers. Data processors have much in common with computers, including the utilization of digital techniques. A closely related field is that of industrial process control. To meet the needs in this field, Ramo-Wooldridge has recently put on the market the RW-300 Digital Control Computer.

The use of digital techniques in military control systems is an accomplished fact. Modern interceptor aircraft, for example, use digital fire control systems. A number of Ramo-Wooldridge scientists and engineers have pioneered in this field, and the photograph above shows the RW-30 Airborne Digital Computer.

The RW-30 is an example of what can be accomplished through the application of digital techniques in conjunction with modern semiconductor components. It performs complete mathematical operations, including multiplications, at the rate of 4000 per second (as fast as large scientific computers). Yet it occupies only 4.19 cubic feet, weighs 203 pounds and uses 400 watts power. It is packaged in four separate units to facilitate installation in aircraft. The magnetic drum memory has a capacity of 2607 21-bit words.

The versatility inherent in digital techniques makes it possible for the RW-30 to handle such varied military aircraft problems as navigation, armament control and bombing, and combinations of these problems, without changes in the RW-30 itself.

The RW-30 also serves to illustrate the balanced integration of systems analysis and product engineering which is a principal objective at Ramo-Wooldridge. Similar programs are in progress on other airborne and electronic control systems, communication and navigation systems, and electronic instrumentation and test equipment. Engineers and scientists are invited to explore openings in these fields at Ramo-Wooldridge.

The Ramo-Wooldridge Corporation

5730 ARBOR VITAE STREET • LOS ANGELES 45, CALIFORNIA

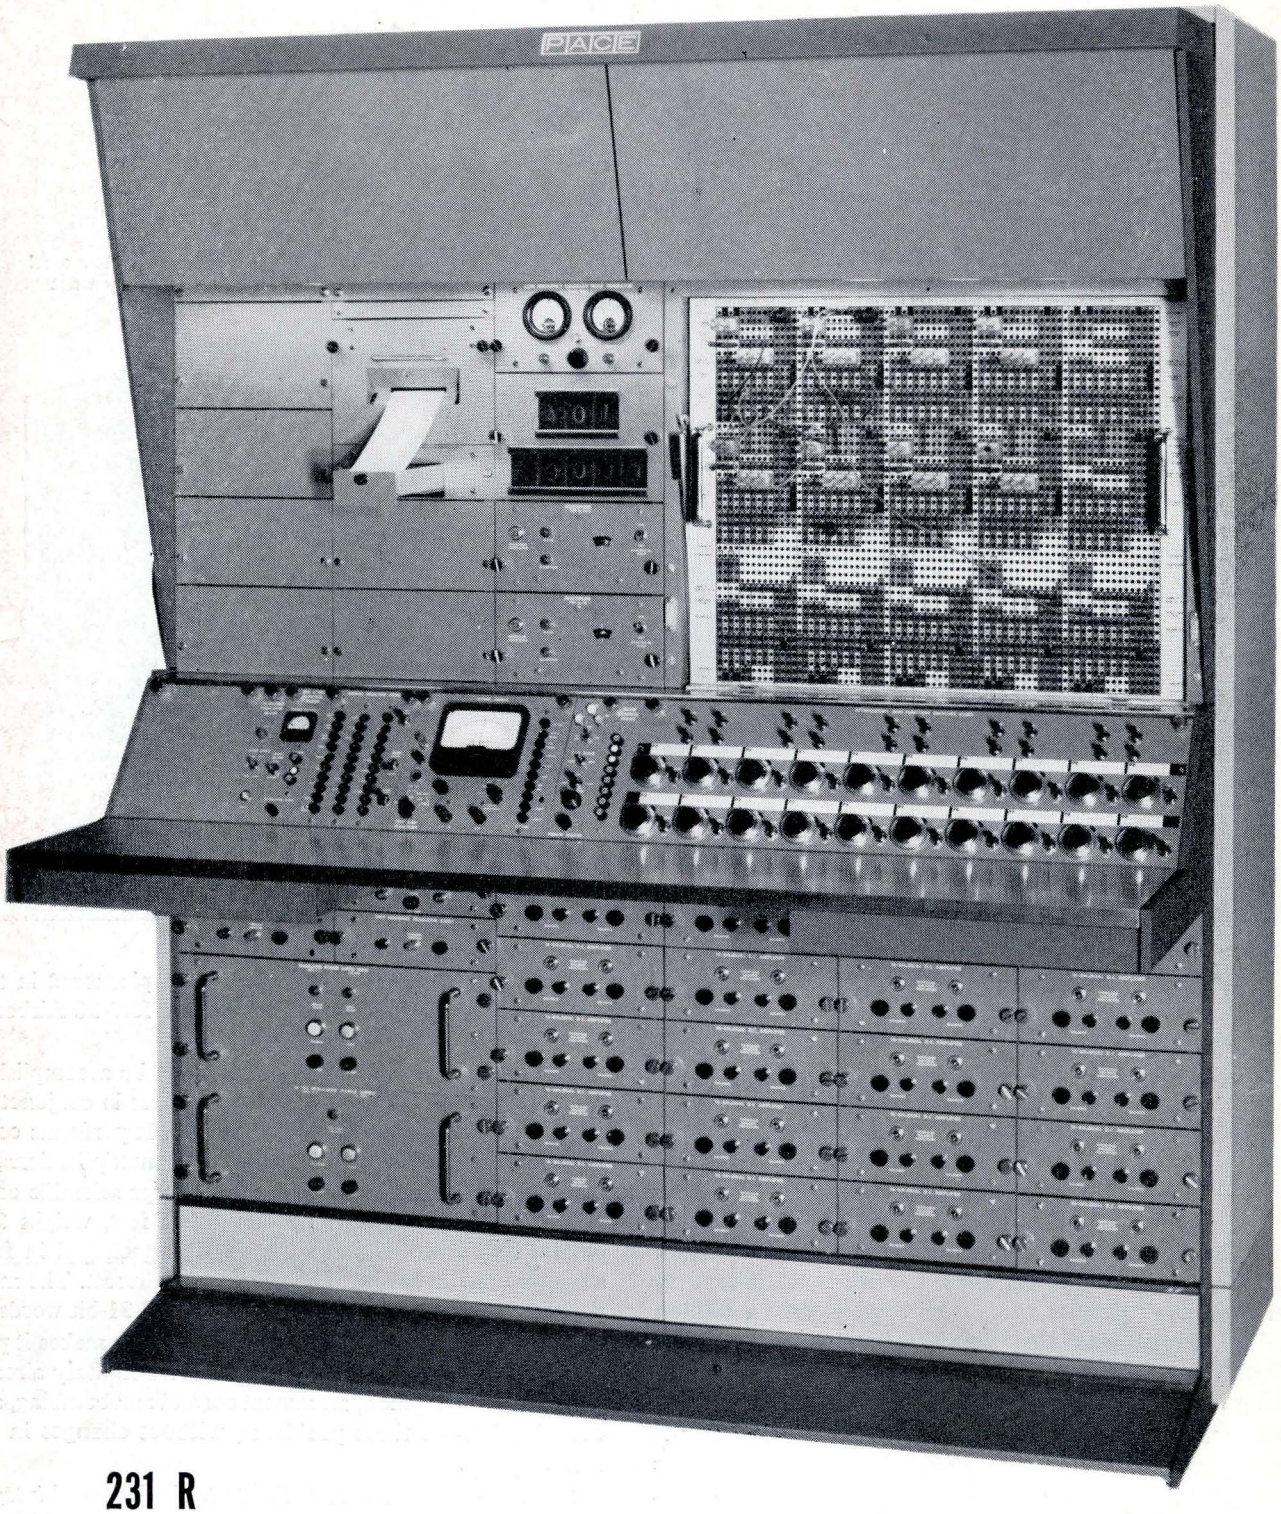

231 R

Symbol of the greatest advance in analog computing techniques——announcing PACE Analog Computer Console 231 R. This console incorporates new and exclusive features that enable it to set new standards in the art of analog computing for speed, precision, and reliability. For full information, write for bulletin number CG-116, Electronic Associates, Inc., Long Branch, N. J.