


MECL

**INTEGRATED CIRCUITS
MC300/MC350 SERIES**

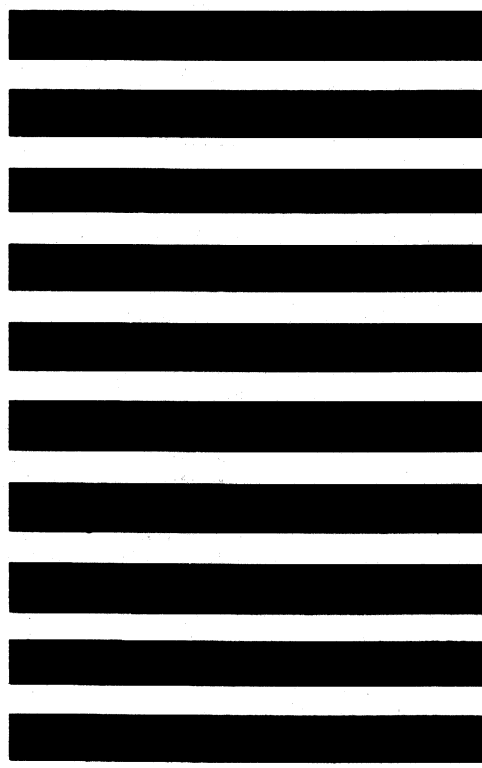

MECL

INTEGRATED CIRCUITS

INDEX MC300 Series

	Page No.
Numerical Index	2-3
Logic Description	2-4
General Information	2-6
Circuit Description	2-6
Definitions	2-7
Packages	2-7
Worst-Case Transfer Characteristics	2-8
Maximum Ratings	2-8
Noise Margins	2-8
 DEVICE SPECIFICATIONS	
GATES	
MC306	3-Input Gate 2-9
MC307	3-Input Gate 2-9
MC301	5-Input Gate 2-12
MC309	Dual 2-Input Gate 2-14
MC310	Dual 2-Input Gate 2-14
MC311	Dual 2-Input Gate 2-14
MC312A	Dual 3-Input Gate 2-16
MC313F	Quad 2-Input Gate 2-18
 FLIP-FLOPS	
MC302	R-S Flip-Flop 2-20
MC308	AC-Coupled J-K Flip-Flop 2-22
MC314	AC-Coupled J-K Flip-Flop 2-24
 HALF-ADDER	
MC303	Half-Adder 2-26
 GATE EXPANDER	
MC305	Gate Expander 2-28
 DRIVERS	
MC304	Bias Driver 2-29
MC315	Line Driver 2-30
MC316	Lamp Driver 2-31
 TRANSLATORS	
MC317	MECL to Saturated Logic Translator 2-32
MC318	Saturated Logic to MECL Translator 2-33

NUMERICAL INDEX
(Functions and Characteristics)

$V_{CC} = 0, V_{EE} = -5.2 \text{ V}, T_A = 25^\circ\text{C}$

Function	Type ①	DC Output Loading Factor Each Output	Propagation Delay t_{pd} ns typ	Total Power Dissipation mW typ/pkg	Case	Page No.
5-Input OR/NOR Gate	MC301	25	7.5	37	71, 72	2-12
R-S Flip-Flop	MC302	↓	11	42		2-20
Half-Adder	MC303	↓	7.5	63		2-26
Bias Driver	MC304	↓	—	18		2-29
5-Input Gate Expander	MC305	—	4.5	—		2-28
3-Input OR/NOR Gate	MC306	25	7.5	37		2-9
3-Input OR/NOR Gate	MC307		7.5	15		2-9
AC-Coupled J-K Flip-Flop	MC308		8.5	87		2-22
Dual 2-Input NOR Gate	MC309		7.0	54		2-14
Dual 2-Input NOR Gate	MC310		7.0	54		2-14
Dual 2-Input NOR Gate	MC311		7.0	41		2-14
Dual 3-Input NOR Gate (With Internal Bias)	MC312A		7.5	70	↓	2-16
Quad 2-Input NOR Gate	MC313F	↓	7.0	125	83	2-18
AC-Coupled J-K Flip-Flop	MC314	↓	12	118	71, 72	2-24
Line Driver	MC315	—	14	180 ②		2-30
Lamp Driver	MC316	—	—	135		2-31
Level Translator — MECL to Saturated Logic	MC317	7 (DTL)	27.5	63	↓	2-32
Level Translator — Saturated Logic to MECL	MC318	25 (MECL)	17	105	71, 72	2-33

① G suffix denotes Metal Can, F suffix denotes Flat Package. (i.e., MC301G = Metal Can, MC301F = Flat Package.)

② With 93-ohm load (each side)

LOGIC DESCRIPTION

MECL MC300 series

POSITIVE LOGIC: V_{hi} is a logical "1", V_{li} is a logical "0"

NEGATIVE LOGIC: V_{hi} is a logical "0", V_{li} is a logical "1"

The logic diagrams shown describe the circuits of the MC300 line and permit quick selection of those circuits required for the implementation of this particular logic system. Pertinent information such as logic equations, typical time delay, typical power dissipation, and truth tables is provided to show line compatibility. Package pin numbers and fan-in and fan-out for each device are specified on each logic diagram. The numbers at the

ends of the terminals are package pin numbers. The numbers in parentheses indicate ac loading factors at each terminal.

MECL circuits require a bias voltage which, for best results, should be obtained from a regulated, temperature-compensated, bias supply. A bias driver, type MC304, is included in the MECL line to provide this function when the bias driver is not contained in the logic element. Specifications for the bias driver are given on page 2-29.

<p>MC302 — R-S FLIP-FLOP</p> <p>(1) 6 (15) (1) 7 (15) (1) 9 (15) (1) 10 (15)</p> <p>1.8 — E</p> <p>$t_{dr} = 10.5 \text{ ns}$ $P_D = 42 \text{ mW}$</p> <table border="1"> <tr><td>R</td><td>S</td><td>Q^{n+1}</td></tr> <tr><td>0</td><td>1</td><td>1</td></tr> <tr><td>1</td><td>0</td><td>0</td></tr> <tr><td>0</td><td>0</td><td>Q^n</td></tr> <tr><td>1</td><td>1</td><td>N.D.</td></tr> </table> <p>DC Set-Reset flip-flop with expandable input and buffered outputs.</p>	R	S	Q^{n+1}	0	1	1	1	0	0	0	0	Q^n	1	1	N.D.	<p>MC308 — AC-COUPLED J-K FLIP-FLOP</p> <p>CLOCKED J-K OPERATION</p> <table border="1"> <tr><td>\bar{J}_s</td><td>\bar{K}_s</td><td>\bar{C}_D</td><td>Q^{n+1}</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>\bar{Q}^n</td></tr> <tr><td>0</td><td>0</td><td>0</td><td>Q^n</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>1</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>0</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>Q^n</td></tr> </table> <p>(1) 9 \bar{K}_s (15) (1) 7 \bar{J}_s (15) (1) 10 \bar{C}_D (8) (3) 8 \bar{J} (15)</p> <p>$t_{dr} = 7.5 \text{ ns}$ $P_D = 87 \text{ mW}$</p> <p>AC-Coupled J-K flip-flop with dc Set and Reset inputs and buffered outputs for counter and shift register applications up to 15 MHz.</p>	\bar{J}_s	\bar{K}_s	\bar{C}_D	Q^{n+1}	0	0	1	\bar{Q}^n	0	0	0	Q^n	0	1	1	1	1	0	1	0	1	1	1	Q^n	<p>MC314 — AC-COUPLED J-K FLIP-FLOP</p> <p>CLOCKED J-K OPERATION</p> <table border="1"> <tr><td>J</td><td>\bar{K}</td><td>\bar{C}</td><td>Q^{n+1}</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>\bar{Q}^n</td></tr> <tr><td>0</td><td>0</td><td>0</td><td>Q^n</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>1</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>0</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>Q^n</td></tr> </table> <p>(1) 9 \bar{K} (15) (1) 7 \bar{J} (15) (1) 10 \bar{C} (8) (3) 8 \bar{K} (15)</p> <p>$t_{dr} = 12 \text{ ns}$ $P_D = 118 \text{ mW}$</p> <p>High-speed ac-coupled J-K flip-flop with dc Set and Reset inputs for counter and shift register applications up to 30 MHz operation.</p>	J	\bar{K}	\bar{C}	Q^{n+1}	0	0	1	\bar{Q}^n	0	0	0	Q^n	0	1	1	1	1	0	1	0	1	1	1	Q^n
R	S	Q^{n+1}																																																															
0	1	1																																																															
1	0	0																																																															
0	0	Q^n																																																															
1	1	N.D.																																																															
\bar{J}_s	\bar{K}_s	\bar{C}_D	Q^{n+1}																																																														
0	0	1	\bar{Q}^n																																																														
0	0	0	Q^n																																																														
0	1	1	1																																																														
1	0	1	0																																																														
1	1	1	Q^n																																																														
J	\bar{K}	\bar{C}	Q^{n+1}																																																														
0	0	1	\bar{Q}^n																																																														
0	0	0	Q^n																																																														
0	1	1	1																																																														
1	0	1	0																																																														
1	1	1	Q^n																																																														
<p>MC301 — 5-INPUT GATE</p> <p>(1) 6 (15) (1) 7 (15) (1) 8 (15) (1) 9 (15) (1) 10 (15)</p> <p>$5 = 6 + 7 + 8 + 9 + 10$ $4 = 6 + 7 + 8 + 9 + 10$</p> <p>$t_{dr} = 7.5 \text{ ns}$ $P_D = 37 \text{ mW}$</p> <p>Provides the positive logic "NOR" function and its complement simultaneously.</p>	<p>MC306 — 3-INPUT GATE</p> <p>(1) 6 (15) (1) 7 (15) (1) 8 (15)</p> <p>$5 = 6 + 7 + 8$ $4 = 6 + 7 + 8$</p> <p>$t_{dr} = 6.0 \text{ ns}$ $P_D = 37 \text{ mW}$</p> <p>Provides the positive logic "NOR" function and its complement simultaneously.</p>	<p>MC307 — 3-INPUT GATE</p> <p>(1) 6 (15) (1) 7 (15) (1) 8 (15)</p> <p>$5 = 6 + 7 + 8$ $4 = 6 + 7 + 8$</p> <p>$t_{dr} = 6.0 \text{ ns}$ *No pull-down resistors $P_D = 15 \text{ mW}$</p> <p>Provides the positive logic "NOR" function and its complement simultaneously. Same as MC306, with pull-down resistors omitted, permitting a reduction of power dissipation (see schematic diagram on page 2-9)</p>																																																															
<p>MC303 — 3-INPUT GATE</p> <p>(1) 7 (15) (1) 8 (15) (1) 9 (15)</p> <p>$6 = 7 + 8$ $5 = 7 + 8$</p> <p>$t_{dr} = 6.5 \text{ ns}$ $P_D = 27 \text{ mW/gate}$</p> <p>Provides the positive logic "NOR" function.</p>																																																																	

<p>MC310 — DUAL 2-INPUT GATE</p> <p>**Optional pull-down resistor. If resistor is desired, connect pin 4 to pin 5.</p> <p>$t_{\text{del}} = 6.5 \text{ ns}$ $P_D = 27 \text{ mW/gate}$</p> <p>Provides the positive logic "NOR" function. Same as MC309 with one output pull-down resistor optional (see schematic diagram on page 2-14).</p>	<p>MC311 — DUAL 2-INPUT GATE</p> <p>**Optional pull-down resistor. If resistor is desired, connect pin 4 to pin 5 or pin 6.</p> <p>$t_{\text{del}} = 6.5 \text{ ns}$ $P_D = 21 \text{ mW/gate}$</p> <p>Provides the positive logic "NOR" function. Same as MC309 with one output pull-down resistor omitted and the second optional (see schematic diagram on page 2-14).</p>	
<p>MC312A — DUAL 3-INPUT GATE</p> <p>$t_{\text{del}} = 6.5 \text{ ns}$ $P_D = 35 \text{ mW/gate}$</p> <p>Provides the positive logic "NOR" function, and features an internal bias driver. This gate without the bias driver is available as the MC312.</p>	<p>MC313F — QUAD 2-INPUT GATE</p> <p>$t_{\text{del}} = 6.5 \text{ ns}$ $P_D = 31 \text{ mW/gate}$</p> <p>Provides the positive logic "NOR" function, and features an internal bias driver.</p>	<p>MC315 — LINE DRIVER</p> <p>$t_{\text{del}} = 14 \text{ ns}$ $P_D = 180 \text{ mW (with } 93 \Omega \text{ load)}$</p> <p>Drives lines of 93 ohms or greater while providing the positive logic "NOR" function and its complement simultaneously.</p>
<p>MC303 — HALF-ADDER</p> <p>$t_{\text{del}} = 7 \text{ ns}$ $P_D = 63 \text{ mW}$</p> <p>Provides the "SUM", "CARRY", and "NOR" functions simultaneously. If complement inputs are not used, an undefined state can occur.</p>	<p>MC316 — LAMP DRIVER</p> <p>$P_D = 135 \text{ mW}$</p> <p>Capable of driving 6-volt lamps. Positive "NOR" function is obtained by applying V_{OH} to pin 4, 5, or 6, with pins 7 and 8 used as inputs. Positive "OR" is obtained by applying V_{OH} to pin 7 or 8, with pins 4, 5, and 6 used as inputs.</p>	<p>MC317 — LEVEL TRANSLATOR</p> <p>$t_{\text{del}} = 30 \text{ ns}$ $P_D = 63 \text{ mW}$</p> <p>Intended for converting non-saturated MECL signal levels to saturated logic levels. Positive "NOR" function is obtained by applying V_{OH} to pin 7 or 8, with pins 4, 5, and 6 used as inputs. Positive "OR" is obtained by applying V_{OH} to pin 4, 5, or 6, with pins 7 and 8 used as inputs.</p>
<p>MC318 — LEVEL TRANSLATOR</p> <p>$t_{\text{del}} = 17 \text{ ns}$ $P_D = 105 \text{ mW}$</p> <p>Intended for converting saturated logic levels to non-saturated MECL signal levels. By applying DTL input logic levels as defined by logical "0" at 0.4 V and logical "1" at 5.0 V, corresponding MECL outputs are obtained as defined by logical "0" at -1.55 V and logical "1" at -0.75 V.</p>	<p>MC305 — 5-INPUT EXPANDER</p> <p>$t_{\text{del}} = 5 \text{ ns}$</p> <p>For use with the MC302, MC306, MC307, and MC315. Each expander unit increases the fan-in of the basic gate by five. For highest performance, a maximum of three expander units per gate is recommended.</p>	<p>Note: Any unused input should be connected to V_{EE}.</p>

CIRCUIT DESCRIPTION

The MECL line of monolithic integrated logic circuits was designed as a non-saturating form of logic which eliminates transistor storage time as a speed limiting characteristic, and permits extremely high-speed operation.

The typical MECL circuit comprises a differential-amplifier input, with emitter-follower output to restore dc levels. High fan-out operation is possible because of the high input impedance of the differential amplifier and the low output impedance of the emitter followers. Power-supply noise is virtually eliminated by the nearly constant current drain of the differential amplifier, even during the transition period. Basic gate design provides for simultaneous output of both the function and its complement.

POWER-SUPPLY CONNECTIONS

Any one of the power supply nodes, V_{BB} , V_{CC} , or V_{EE} may be used as ground; however, the manufacturer has found it most convenient to ground the V_{CC} node. In such a case: $V_{CC} = 0$, $V_{BB} = -1.15$ V, $V_{EE} = -5.2$ V, as shown in the schematic diagram above.

SYSTEM LOGIC SPECIFICATIONS

The output logic swing of 0.8 V then varies from a low state of $V_L = -1.55$ V to a high state of $V_H = -0.75$ V with respect to ground.

Positive logic is used when reference is made to logical "0's" or "1's". Then

$$\begin{aligned} \text{"0"} &= -1.55 \text{ V} \\ \text{"1"} &= -0.75 \text{ V} \end{aligned} \quad \text{typical}$$

Dynamic logic refers to a change of logic states. Dynamic "0" is a negative going voltage excursion and a dynamic "1" is a positive going voltage excursion.


CIRCUIT OPERATION

A bias of -1.15 volts is applied to the "bias input" of the differential amplifier and the logic signals are applied to the "signal input". If a logical "0" is applied, the current through R_E is supplied by the fixed-biased transistor. A drop of 800 mV occurs across R_{C2} . The OR output then is -1.55 V, or one V_{BE} -drop below 800 mV. Since no current flows in the "signal input" transistor, the NOR output is a V_{BE} -drop below ground, or -0.75 volts. When a logical "1" level is applied to the "signal input", the current through R_{C2} is switched to the "signal input" transistor and a drop of 800 mV occurs across R_{C1} . The OR output then goes to -0.75 volts and the NOR output goes to -1.55 volts.

Note: Any unused input should be connected to V_{EE} .

BIAS VOLTAGE SOURCE

The bias voltage applied to the bias input is obtained from a regulated, temperature-compensated bias driver, type MC304. The temperature characteristics of the bias driver compensate for any variations in circuit operating point over the temperature range or supply voltage changes, to insure that the threshold point is always in the center of the transition region. The bias driver can be used to drive up to 25 logic elements and should be employed for all elements except those with built-in bias networks.

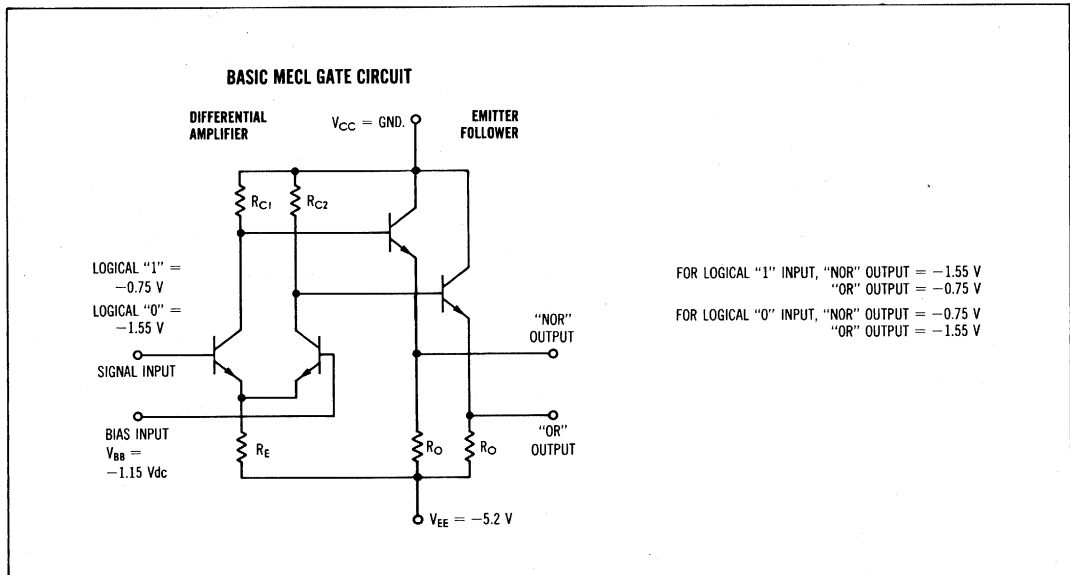

GENERAL INFORMATION (continued)

DEFINITIONS


- e_{in} AC signal applied to the input
- e_{out} AC signal at the output
- I_C Amount of current drawn from the positive power supply by the test unit
- I_{CEX} Total collector leakage current exhibited by the gate expander when all inputs are at the negative supply potential
- I_E Amount of current drawn from the test unit by the negative power supply
- I_{in} Current drawn by the input of the test unit when a logical "1" (V_H) is applied to the input
- I_L Current drawn from a node when that node is at ground potential
- t_{d1} Time required for the output pulse to reach the 50% point of its leading edge when referenced to the 50% point of the input pulse leading edge
- t_{d2} Time required for the output pulse to reach the 50% point of its trailing edge when referenced to the 50% point of the input pulse trailing edge
- t_{df} Time required for a flip-flop output to reach the 50% point of its negative going edge when referenced to the 50% point of the input pulse leading edge
- t_{dr} Time required for a flip-flop output to reach the 50% point of its positive going edge when referenced to the 50% point of the input pulse leading edge
- t_f Time required for the output pulse to go more negative from its 90% point to its 10% point

- t_r Time required for the output pulse to go more positive from its 10% point to its 90% point
- V_1 "NOR" output voltage — logical "1" level output voltage when a logical "0" level (V_L) is applied to the input
- V_2 "OR" output voltage — logical "0" level output voltage when a logical "0" level (V_L) is applied to the input
- V_3 Saturation breakpoint voltage which corresponds to the "NOR" output characteristic where the rate of change in the output voltage to the rate of change in input voltage is zero
- V_4 "NOR" output voltage — logical "0" level output voltage when a logical "1" level ($V_1 \max$) level is applied to the input
- V_5 "OR" output voltage — logical "1" level output voltage when a logical "1" ($V_1 \max$) level is applied to the input
- V_6 Output latch voltage — input voltage to a flip-flop which causes the output voltage to change from a logical "1" level to a logical "0" level and corresponds to the point where the rate of change in the output voltage to the rate of the input voltage approaches infinity
- V_H Logical "1" input voltage
- V_L Logical "0" input voltage
- V_{OH} High-level output voltage when the saturated logic circuit output is in an "off" condition
- V_{OL} Low-level output voltage when the saturated logic output circuit is in an "on" condition
- ΔV_1 } Change in the "1" level output voltage as the load is varied from no load to full load
- ΔV_5 }

PACKAGES

All MECL integrated circuits are available in both the TO-91, 10-lead flat package and the 10-lead metal package. To order the flat package, add suffix "F" to basic type number; to order metal package, add suffix "G".





Exception: Type MC313F is available only in the TO-86, 14-lead flat package.

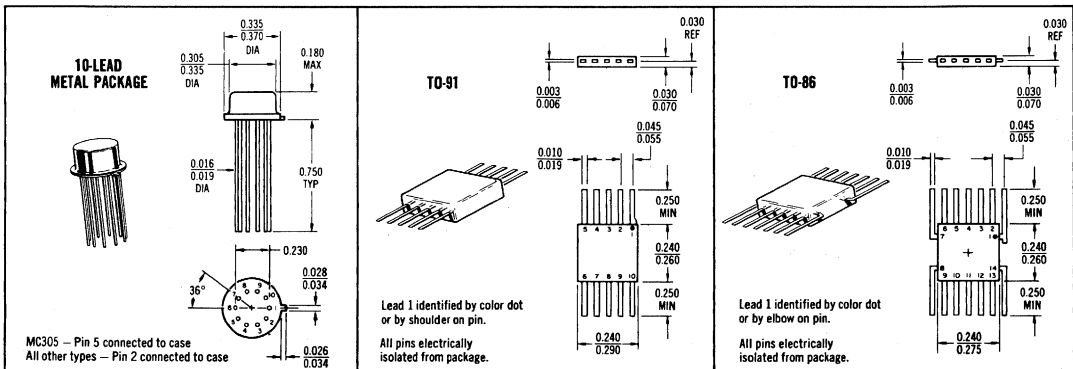

GENERAL INFORMATION (continued)

WORST-CASE TRANSFER CHARACTERISTICS

The following graphs show minimum and maximum limits of major parameters associated with the transfer characteristics of the MECL line. Min-Max limits, given at three different temperatures can be interpreted for design purposes as 10% to 90% spreads at all points on the curve except for guaranteed points in the Electrical Characteristics tables.

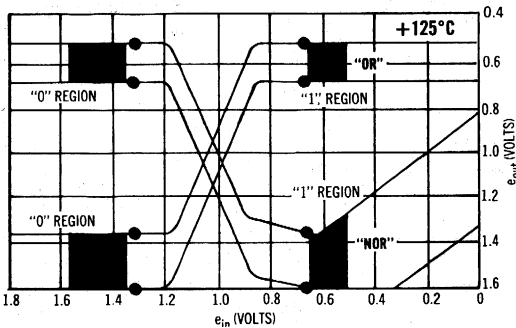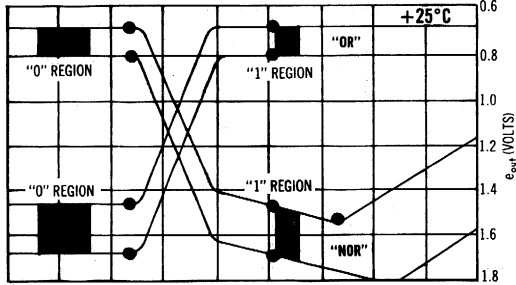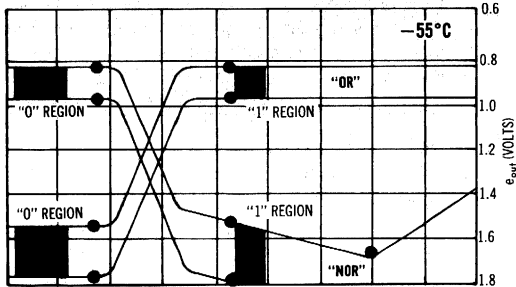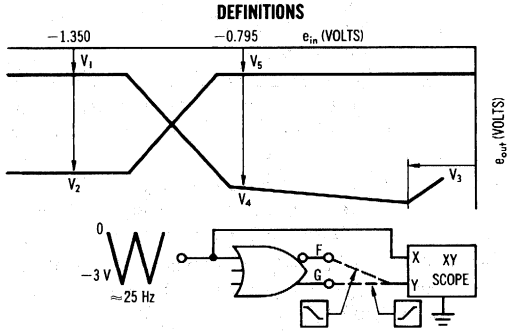

MAXIMUM RATINGS

Characteristic	Symbol	Rating	Unit
Power Supply Voltage ($V_{CC} = 0$ Vdc)	V_{EE}	-10	Vdc
Base Input Voltage ($V_{CC} = 0$ Vdc)	V_{in}	0 Vdc to V_{EE}	Vdc
Output Source Current	I_o	20	mAdc
Storage Temperature Range	T_{stg}	-65 to +150	°C

Ratings above which device life may be impaired:

Power Supply Voltage ($V_{CC} = 0$ Vdc)	V_{EE}	-10	Vdc
Base Input Voltage ($V_{CC} = 0$ Vdc)	V_{in}	0 Vdc to V_{EE}	Vdc
Output Source Current	I_o	20	mAdc
Storage Temperature Range	T_{stg}	-65 to +150	°C

Recommended maximum ratings above which performance may be degraded:



Operating Temperature Range	T_A	-55 to +125	°C
AC Fan-In (Expandable Gates)	m	18	—
AC Fan-Out* (Gates and Flip-Flops)	n	15	—

*Although a minimum dc fan-out of 25 is guaranteed in each electrical specification, it is recommended that the maximum ac fan-out of 15 be used for high-speed operation.

NOISE MARGINS (90 PERCENTILE)


The following graphs show worst-case Noise Margins as a function of temperature and fan-out. Top graph illustrates the advantage gained through use of MC304 bias driver, as compared with non-compensated fixed bias source, bottom.

Note: Any unused input should be connected to V_{EE} .

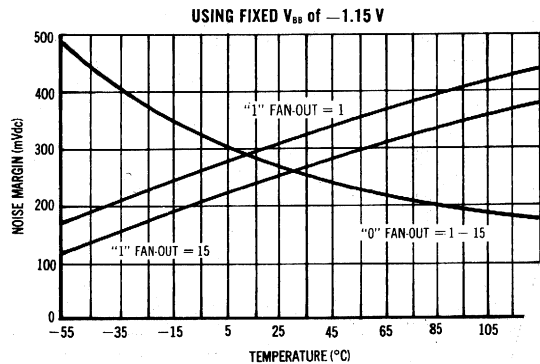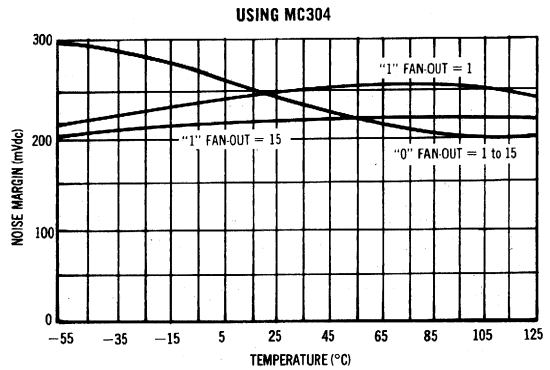


MC306, MC307 (continued)



TYPICAL INPUT CHARACTERISTICS





TYPICAL OUTPUT CHARACTERISTICS



TYPICAL SWITCHING TIME VARIATIONS
MC306



SWITCHING CHARACTERISTICS (10% to 90% distribution)

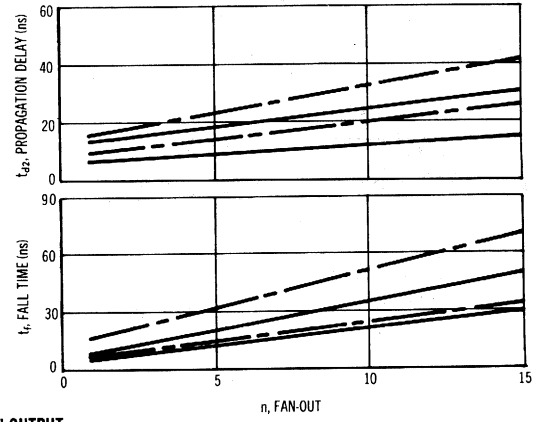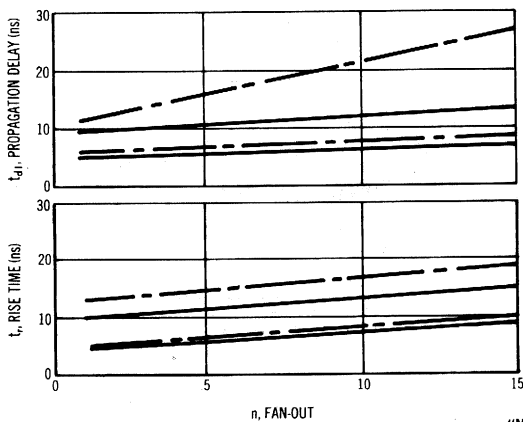

— -55°C and $+25^\circ\text{C}$
- - $+125^\circ\text{C}$

MC306, MC307 (continued)

ELECTRICAL CHARACTERISTICS



Characteristic	V _H Pin No	V _I max Pin No	V _L Pin No	V _{EE} Pin No	V _{BB} Pin No	dV _{in} Pin No	I _L Pin No	Ground Pin No	Symbol Pin No in ()	Test Limits						Unit	
										-55°C		+25°C		+125°C			
										Min	Max	Min	Max	Min	Max		
Power Supply	MC306	—	—	—	2,6,7,8	1	—	—	3	I _E (2)	—	8.85	—	8.85	—	8.15	mAdc
Drain Current	MC307	—	—	—	2,6,7,8	1	—	—	3	I _E (2)	—	3.6	—	3.6	—	3.3	mAdc
Input Current		6	—	—	2,7,8	1	—	—	3	I _{in} (6)	—	—	—	100	—	—	μAdc
		7	—	—	2,6,8	1	—	—	3	I _{in} (7)	—	—	—	—	—	—	↓
		8	—	—	2,6,7	1	—	—	3	I _{in} (8)	—	—	—	—	—	—	↓
"NOR" Logical "1" Output Voltage		—	—	6	2,7,8	1	—	—	3	V _I (5)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc
		—	—	7	2,6,8	1	—	—	3	V _I (5)	↓	↓	↓	↓	↓	↓	↓
		—	—	8	2,6,7	1	—	—	3	V _I (5)	↓	↓	↓	↓	↓	↓	↓
"NOR" Logical "0" Output Voltage		—	6	—	2,7,8	1	—	—	3	V _A (5)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc
		—	7	—	2,6,8	1	—	—	3	V _A (5)	↓	↓	↓	↓	↓	↓	↓
		—	8	—	2,6,7	1	—	—	3	V _A (5)	↓	↓	↓	↓	↓	↓	↓
"OR" Logical "1" Output Voltage		—	6	—	2,7,8	1	—	—	3	V _S (4)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc
		—	7	—	2,6,8	1	—	—	3	V _S (4)	↓	↓	↓	↓	↓	↓	↓
		—	8	—	2,6,7	1	—	—	3	V _S (4)	↓	↓	↓	↓	↓	↓	↓
"OR" Logical "0" Output Voltage		—	—	6	2,7,8	1	—	—	3	V _Z (4)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc
		—	—	7	2,6,8	1	—	—	3	V _Z (4)	↓	↓	↓	↓	↓	↓	↓
		—	—	8	2,6,7	1	—	—	3	V _Z (4)	↓	↓	↓	↓	↓	↓	↓
"NOR" Output Voltage Change (No load to full load)		—	—	6	2,7,8	1	—	5⊕	3	ΔV _I (5)	—	-0.055	—	-0.055	—	-0.060	Volts
"OR" Output Voltage Change (No load to full load)		—	6	—	2,7,8	1	—	4⊕	3	ΔV _S (4)	—	-0.055	—	-0.055	—	-0.060	Volts
"NOR" Saturation Breakpoint Voltage		—	—	—	2,7,8	1	6⊙	—	3	V _S (5)	—	-0.40	—	-0.55	—	-0.68	Vdc
		—	—	—	2,6,8	1	7⊙	—	3	V _S (5)	—	↓	—	↓	—	↓	↓
		—	—	—	2,6,7	1	8⊙	—	3	V _S (5)	—	↓	—	↓	—	↓	↓
Switching Times		Pulse In	Pulse Out								Typ	Max	Typ	Max	Typ	Max	
Propagation Delay Time		6	4	—	2,7,8	1	—	—	3	t _{d1} (4)	7.0	11.0	7.0	11.5	9.5	14.5	ns
		6	5	—	2,7,8	1	—	—	3	t _{d1} (5)	5.5	10.0	5.5	10.5	7.0	12.5	
		6	4	—	2,7,8	1	—	—	3	t _{d2} (4)	5.5	10.0	5.5	11.0	7.0	12.5	
		6	5	—	2,7,8	1	—	—	3	t _{d2} (5)	7.0	10.5	7.0	11.0	9.5	14.5	
Rise Time		6	4	—	2,7,8	1	—	—	3	t _r (4)	6.0	8.5	6.0	10.0	8.0	13.0	
		6	5	—	2,7,8	1	—	—	3	t _r (5)	7.5	11.5	7.5	12.5	9.5	15.0	
Fall Time		6	4	—	2,7,8	1	—	—	3	t _f (4)	6.5	10.5	6.5	12.0	9.0	15.0	
		6	5	—	2,7,8	1	—	—	3	t _f (5)	6.5	12.0	6.5	12.5	9.0	15.0	

Pins not listed are left open.

⊕ Input voltage is adjusted to obtain dV "NOR" / dV_{in} = 0.

⊙ Current test conditions: no load = 0; full load = -2.5mAdc ±5%.

SWITCHING CHARACTERISTICS (10% to 90% distribution)

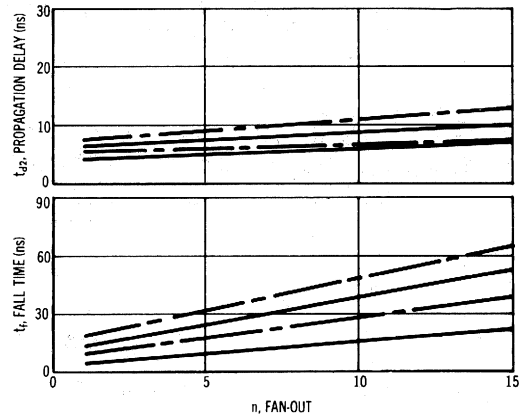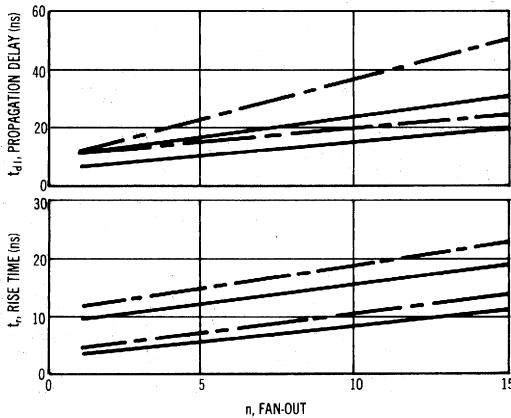


— -55°C and +25°C
 - -125°C

5-INPUT GATE


MECL MC300 series

MC301


A 5-input gate that provides the positive logic "OR" function and its complement simultaneously.

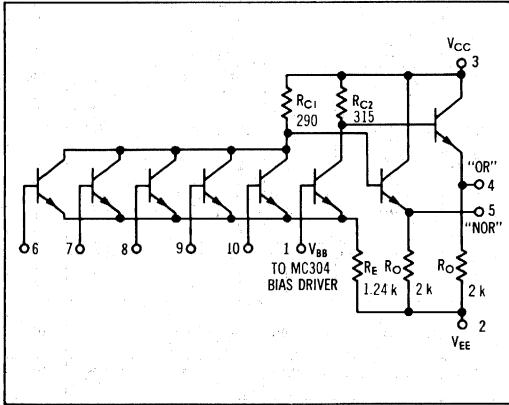


SWITCHING TIME TEST CIRCUIT

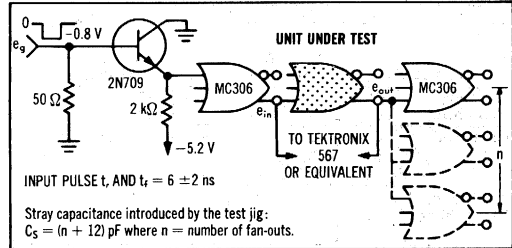


PROPAGATION DELAY




RISE AND FALL TIME







TYPICAL INPUT CHARACTERISTICS



TYPICAL OUTPUT CHARACTERISTICS



SWITCHING CHARACTERISTICS (10% to 90% distribution)

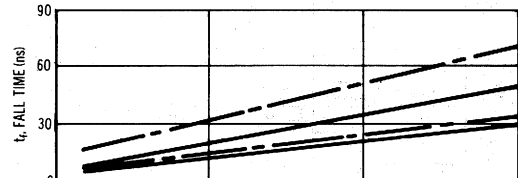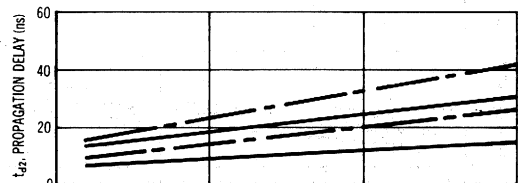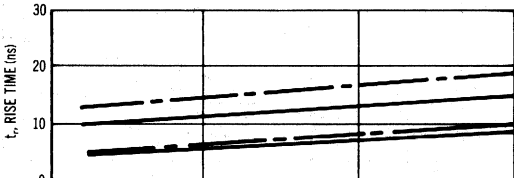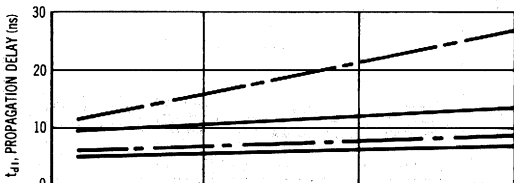

"NOR" OUTPUT

— —55°C and +25°C
 - - - +125°C

MC301 (continued)



ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions					Symbol Pin No in ()	Test Limits						Unit			
	V _{dc} ± 1%						-55°C		+25°C		+125°C					
	V _H Pin No	V _{I max} Pin No	V _L Pin No	V _{EE} Pin No	V _{SB} Pin No		Min	Max	Min	Max	Min	Max				
Power Supply Drain Current	—	—	—	2,6,7,8,9,10	1	—	—	8.85	—	8.85	—	8.15	mAdc			
Input Current	6	—	—	2,7,8,9,10	1	—	—	—	100	—	—	—	μAdc			
	7	—	—	2,6,8,9,10	1	—	—	—	—	—	—	—	—			
	8	—	—	2,6,7,9,10	1	—	—	—	—	—	—	—	—			
	9	—	—	2,6,7,8,10	1	—	—	—	—	—	—	—	—			
	10	—	—	2,6,7,8,9	1	—	—	—	—	—	—	—	—			
"NOR" Logical "1" Output Voltage	—	—	6	2,7,8,9,10	1	—	—	3	V _I (5)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc
	—	—	7	2,6,8,9,10	1	—	—	3	V _I (5)	—	—	—	—	—	—	—
	—	—	8	2,6,7,9,10	1	—	—	3	V _I (5)	—	—	—	—	—	—	—
	—	—	9	2,6,7,8,10	1	—	—	3	V _I (5)	—	—	—	—	—	—	—
	—	—	10	2,6,7,8,9	1	—	—	3	V _I (5)	—	—	—	—	—	—	—
"NOR" Logical "0" Output Voltage	—	6	—	2,7,8,9,10	1	—	—	3	V _O (5)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc
	—	7	—	2,6,8,9,10	1	—	—	3	V _O (5)	—	—	—	—	—	—	—
	—	8	—	2,6,7,9,10	1	—	—	3	V _O (5)	—	—	—	—	—	—	—
	—	9	—	2,6,7,8,10	1	—	—	3	V _O (5)	—	—	—	—	—	—	—
	—	10	—	2,6,7,8,9	1	—	—	3	V _O (5)	—	—	—	—	—	—	—
"OR" Logical "1" Output Voltage	—	6	—	2,7,8,9,10	1	—	—	3	V _I (4)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc
	—	7	—	2,6,8,9,10	1	—	—	3	V _I (4)	—	—	—	—	—	—	—
	—	8	—	2,6,7,9,10	1	—	—	3	V _I (4)	—	—	—	—	—	—	—
	—	9	—	2,6,7,8,10	1	—	—	3	V _I (4)	—	—	—	—	—	—	—
	—	10	—	2,6,7,8,9	1	—	—	3	V _I (4)	—	—	—	—	—	—	—
"OR" Logical "0" Output Voltage	—	—	6	2,7,8,9,10	1	—	—	3	V _O (4)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc
	—	—	7	2,6,8,9,10	1	—	—	3	V _O (4)	—	—	—	—	—	—	—
	—	—	8	2,6,7,9,10	1	—	—	3	V _O (4)	—	—	—	—	—	—	—
	—	—	9	2,6,7,8,10	1	—	—	3	V _O (4)	—	—	—	—	—	—	—
	—	—	10	2,6,7,8,9	1	—	—	3	V _O (4)	—	—	—	—	—	—	—
"NOR" Output Voltage Change (No load to full load)	—	—	6	2,7,8,9,10	1	—	5Ⓞ	3	ΔV _I (5)	—	-0.055	—	-0.055	—	-0.060	Volts
"OR" Output Voltage Change (No load to full load)	—	6	—	2,7,8,9,10	1	—	4Ⓞ	3	ΔV _I (4)	—	-0.055	—	-0.055	—	-0.060	Volts
"NOR" Saturation Breakpoint Voltage	—	—	—	2,7,8,9,10	1	6Ⓞ	—	3	V _S (5)	—	-0.40	—	-0.55	—	-0.68	Vdc
	—	—	—	2,6,8,9,10	1	7Ⓞ	—	3	V _S (5)	—	—	—	—	—	—	—
	—	—	—	2,6,7,9,10	1	8Ⓞ	—	3	V _S (5)	—	—	—	—	—	—	—
	—	—	—	2,6,7,8,10	1	9Ⓞ	—	3	V _S (5)	—	—	—	—	—	—	—
	—	—	—	2,6,7,8,9	1	10Ⓞ	—	3	V _S (5)	—	—	—	—	—	—	—
Switching Times	Pulse In	Pulse Out								Typ	Max	Typ	Max	Typ	Max	
Propagation Delay Time	6	4	—	2,7,8,9,10	1	—	—	3	t _{pd} (4)	8.0	12.0	8.5	12.5	10.0	15.5	ns
	6	5	—	2,7,8,9,10	1	—	—	3	t _{pd} (5)	6.5	10.0	6.5	11.0	7.5	14.0	
	6	4	—	2,7,8,9,10	1	—	—	3	t _{pd} (4)	5.5	9.0	6.0	10.0	8.0	12.0	
	6	5	—	2,7,8,9,10	1	—	—	3	t _{pd} (5)	7.5	11.0	8.0	12.5	10.0	15.5	
Rise Time	6	4	—	2,7,8,9,10	1	—	—	3	t _r (4)	6.5	9.0	7.0	10.0	10.5	15.5	
	6	5	—	2,7,8,9,10	1	—	—	3	t _r (5)	8.5	14.0	9.0	14.5	11.0	17.5	
Fall Time	6	4	—	2,7,8,9,10	1	—	—	3	t _f (4)	7.0	11.5	7.5	13.0	10.0	16.0	
	6	5	—	2,7,8,9,10	1	—	—	3	t _f (5)	7.0	12.0	7.5	12.5	10.0	15.5	

Pins not listed are left open

Ⓞ Input voltage is adjusted to obtain dV "NOR" / dV_{in} = "0".

Ⓞ Current test conditions: no load = 0; full load = -2.5mAdc ± 5%.

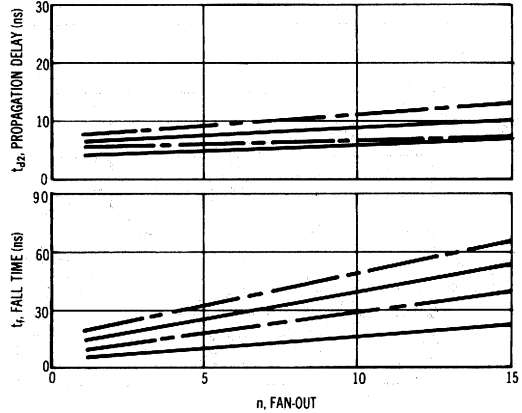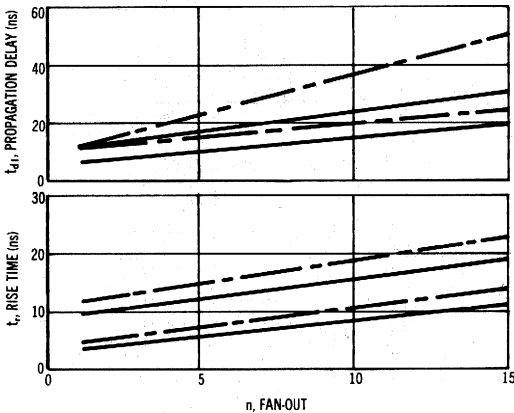

"OR" OUTPUT




— — — -55°C and +25°C
 - - - - +125°C

DUAL 2-INPUT GATES




MECL MC300 series

MC309 · MC310 · MC311


Dual 2-input gates that provide the positive logic "NOR" function. MC309 has two output pull-down resistors; MC310 has one of the output pull-down resistors optional; MC311 omits one output pull-down resistor and has the second optional.

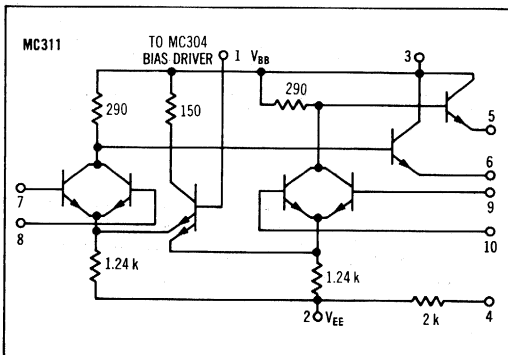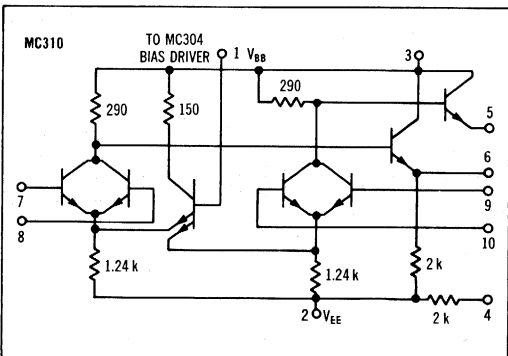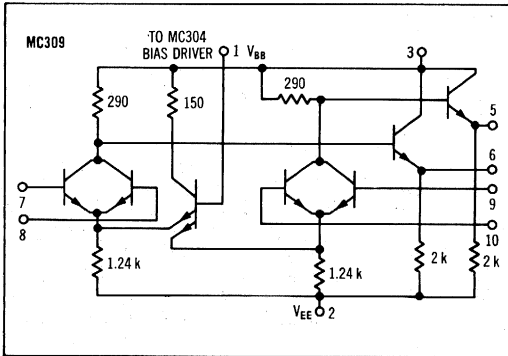


SWITCHING TIME TEST CIRCUIT

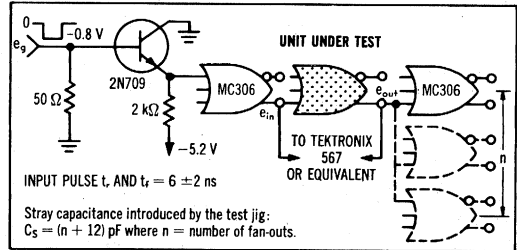

TYPICAL INPUT CHARACTERISTICS



TYPICAL OUTPUT CHARACTERISTICS




MC309, MC310, MC311 (continued)

ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions					dV _{in}	I _L	Ground	Symbol Pin No in ()	Test Limits						Unit	
	V _{dc} ± 1%									-55°C		+25°C		+125°C			
	V _{I4} Pin No	V _{I1max} Pin No	V _L Pin No	V _{EE} Pin No	V _{BB} Pin No					Min	Max	Min	Max	Min	Max		
Power Supply	MC309, MC310	—	—	—	—	—	—	3	I _E (2)	—	13.0	—	13.0	—	12.0	mAdc	
Drain Current	MC311	—	—	—	—	—	—	3	I _E (2)	—	10.1	—	10.1	—	9.3	mAdc	
Input Current	7	—	—	2,8,9,10	1	—	—	3	I _{in} (7)	—	—	—	100	—	—	μAdc	
	8	—	—	2,7,9,10	1	—	—	3	I _{in} (8)	—	—	—	—	—	—	↓	
	9	—	—	2,7,8,10	1	—	—	3	I _{in} (9)	—	—	—	—	—	—	↓	
	10	—	—	2,7,8,9	1	—	—	3	I _{in} (10)	—	—	—	—	—	—	↓	
"NOR" Logical "1" Output Voltage	—	—	7	2,8,9,10	1	—	—	3	V _I (6)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	V _{dc}	
	—	—	8	2,7,9,10	1	—	—	3	V _I (6)	↓	↓	↓	↓	↓	↓	↓	
	—	—	9	2,7,8,10	1	—	—	3	V _I (5)	↓	↓	↓	↓	↓	↓	↓	
	—	—	10	2,7,8,9	1	—	—	3	V _I (5)	↓	↓	↓	↓	↓	↓	↓	
"NOR" Logical "0" Output Voltage	—	7	—	2,8,9,10	1	—	—	3	V _V (6)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	V _{dc}	
	—	8	—	2,7,9,10	1	—	—	3	V _V (6)	↓	↓	↓	↓	↓	↓	↓	
	—	9	—	2,7,8,10	1	—	—	3	V _V (5)	↓	↓	↓	↓	↓	↓	↓	
	—	10	—	2,7,8,9	1	—	—	3	V _V (5)	↓	↓	↓	↓	↓	↓	↓	
"NOR" Output Voltage Change (No load to full load)	—	—	—	2,7,8,9,10	1	—	6 ⊕	3	ΔV _I (6)	—	-0.055	—	-0.055	—	-0.060	V _{dc}	
	—	—	—	2,7,8,9,10	1	—	5 ⊕	3	ΔV _I (5)	—	-0.055	—	-0.055	—	-0.060	V _{dc}	
"NOR" Saturation Breakpoint Voltage	—	—	—	2,8,9,10	1	7 ⊕	—	3	V _S (6)	—	-0.40	—	-0.55	—	-0.68	V _{dc}	
	—	—	—	2,7,9,10	1	8 ⊕	—	3	V _S (6)	—	↓	—	↓	—	↓	↓	
	—	—	—	2,7,8,10	1	9 ⊕	—	3	V _S (5)	—	↓	—	↓	—	↓	↓	
	—	—	—	2,7,8,9	1	10 ⊕	—	3	V _S (5)	—	↓	—	↓	—	↓	↓	
Switching Times	Pulse In	Pulse Out									Typ	Max	Typ	Max	Typ	Max	ns
Propagation Delay Time	7	6	—	2,8,9,10	1	—	—	3	t _{er} (6)	5.5	10.0	6.0	11.0	7.0	12.0	↓	
	10	5	—	2,7,8,9	1	—	—	3	t _{er} (5)	5.5	10.0	6.0	11.0	7.0	12.0		
	7	6	—	2,8,9,10	1	—	—	3	t _{er} (6)	6.5	13.0	7.0	13.5	9.5	15.0		
	10	5	—	2,7,8,9	1	—	—	3	t _{er} (5)	6.5	13.0	7.0	13.5	9.5	15.0		
Rise Time	7	6	—	2,8,9,10	1	—	—	3	t _r (6)	6.0	12.0	6.0	12.0	7.0	13.5	↓	
	10	5	—	2,7,8,9	1	—	—	3	t _r (5)	6.0	12.0	6.0	12.0	7.0	13.5		
Fall Time	7	6	—	2,8,9,10	1	—	—	3	t _f (6)	7.0	13.0	7.5	14.0	9.5	17.0	↓	
	10	5	—	2,7,8,9	1	—	—	3	t _f (5)	7.0	13.0	7.5	14.0	9.5	17.0		

Pins not listed are left open For MC310, connect pin 4 to pin 5 for all tests ⊕ Input voltage is adjusted to obtain dV "NOR" / dV_{in} = 0.
 ⊗ Current test conditions: no load = 0; full load = -2.5 mAdc ± 5%.

SWITCHING CHARACTERISTICS (10% to 90% distribution)

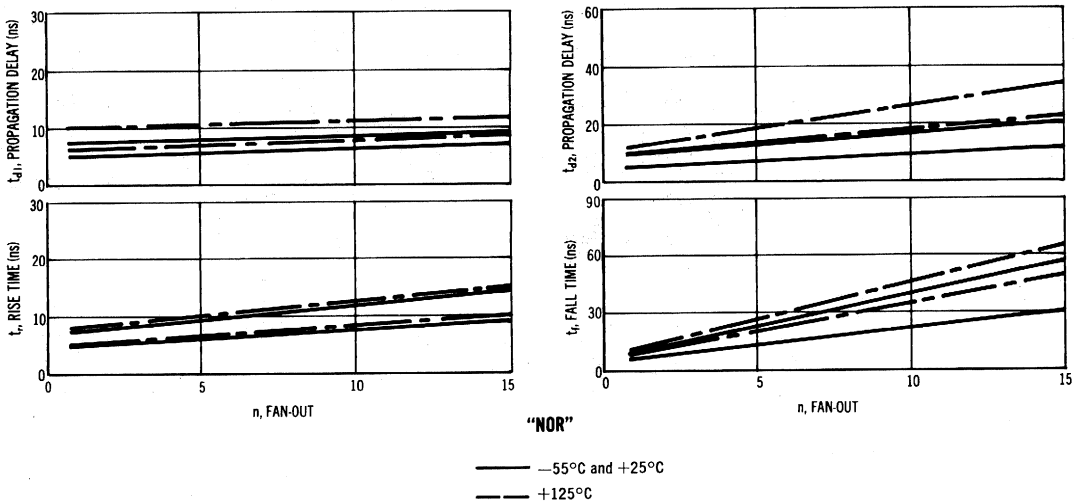


DUAL 3-INPUT GATE




MECL MC300 series

MC312A


Dual 3-input gate that provides the positive logic "NOR" function, and features an internal bias driver. This gate is available without bias driver as MC312.

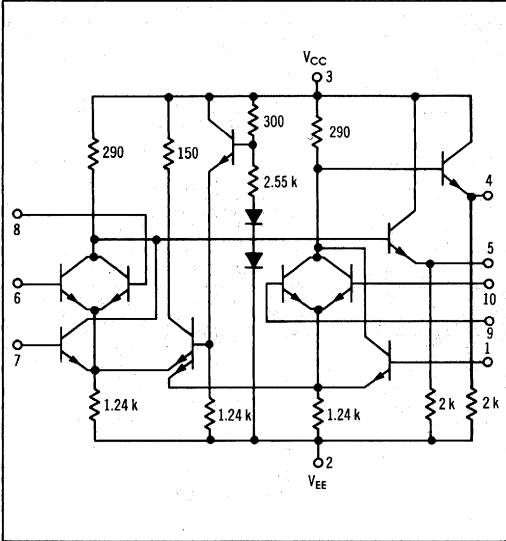


SWITCHING TIME TEST CIRCUIT

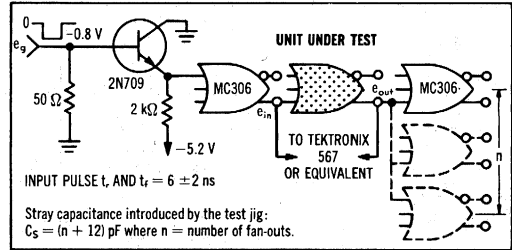

TYPICAL INPUT CHARACTERISTICS



TYPICAL OUTPUT CHARACTERISTICS




MC312A (continued)

ELECTRICAL CHARACTERISTICS

Characteristic	V _H Pin No	V _{I max} Pin No	V _L Pin No	V _{EE} Pin No	dV _{in} Pin No	I _L Pin No	Ground Pin No	Symbol Pin No in ()	Test Limits						Unit			
									-55°C		+25°C		+125°C					
									Min	Max	Min	Max	Min	Max				
Power Supply Drain Current	—	—	—	1.2,6,7,8,9,10	—	—	3	I _E (2)	—	17.7	—	17.0	—	16.4	mAdc			
Input Current	1	—	—	2,6,7,8,9,10	—	—	3	I _{in} (1)	—	—	—	100	—	—	μAdc			
	6	—	—	1,2,7,8,9,10	—	—	3	I _{in} (6)	—	—	—	—	—	↓				
	7	—	—	1,2,6,8,9,10	—	—	3	I _{in} (7)	—	—	—	—	↓					
	8	—	—	1,2,6,7,9,10	—	—	3	I _{in} (8)	—	—	—	—				↓		
	9	—	—	1,2,6,7,8,10	—	—	3	I _{in} (9)	—	—	—	—					↓	
	10	—	—	1,2,6,7,8,9	—	—	3	I _{in} (10)	—	—	—	—						↓
"NOR" Logical "1" Output Voltage	—	—	6	1,2,7,8,9,10	—	—	3	V _i (5)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc			
	—	—	7	1,2,6,8,9,10	—	—	3	V _i (5)	↓	↓	↓	↓	↓	↓				
	—	—	8	1,2,6,7,9,10	—	—	3	V _i (5)	↓	↓	↓	↓	↓			↓		
	—	—	1	2,6,7,8,9,10	—	—	3	V _i (4)	↓	↓	↓	↓	↓				↓	
	—	—	9	1,2,6,7,8,10	—	—	3	V _i (4)	↓	↓	↓	↓	↓					↓
	—	—	10	1,2,6,7,8,9	—	—	3	V _i (4)	↓	↓	↓	↓	↓					
"NOR" Logical "0" Output Voltage	—	6	—	1,2,7,8,9,10	—	—	3	V _e (5)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc			
	—	7	—	1,2,6,8,9,10	—	—	3	V _e (5)	↓	↓	↓	↓	↓	↓				
	—	8	—	1,2,6,7,9,10	—	—	3	V _e (5)	↓	↓	↓	↓	↓			↓		
	—	1	—	2,6,7,8,9,10	—	—	3	V _e (4)	↓	↓	↓	↓	↓				↓	
	—	9	—	1,2,6,7,8,10	—	—	3	V _e (4)	↓	↓	↓	↓	↓					↓
	—	10	—	1,2,6,7,8,9	—	—	3	V _e (4)	↓	↓	↓	↓	↓					
"NOR" Output Voltage Change	—	—	6	1,2,7,8,9,10	—	5⊕	3	ΔV _i (5)	—	-0.055	—	-0.055	—	-0.060	Volts Volts			
	—	—	1	2,6,7,8,9,10	—	4⊕	3	ΔV _i (4)	—	-0.055	—	-0.055	—	-0.060				
"NOR" Saturation Breakpoint Voltage	—	—	—	1,2,7,8,9,10	6⊕	—	3	V _s (5)	—	-0.40	—	-0.55	—	-0.68	Vdc			
	—	—	—	1,2,6,8,9,10	7⊕	—	3	V _s (5)	↓	↓	↓	↓	↓	↓				
	—	—	—	1,2,6,7,9,10	8⊕	—	3	V _s (5)	↓	↓	↓	↓	↓			↓		
	—	—	—	2,6,7,8,9,10	1⊕	—	3	V _s (4)	↓	↓	↓	↓	↓				↓	
	—	—	—	1,2,6,7,8,10	9⊕	—	3	V _s (4)	↓	↓	↓	↓	↓					↓
	—	—	—	1,2,6,7,8,9	10⊕	—	3	V _s (4)	↓	↓	↓	↓	↓					
Switching Times	Pulse In	Pulse Out	—	—	—	—	—	—	Typ	Max	Typ	Max	Typ	Max	ns			
	Propagation Delay Time		—	—	—	—	—	—	—	—	—	—	—	—		↓		
Rise Time	6	5	—	1,2,7,8,9,10	—	—	3	t _{ai} (5)	6.5	10.5	6.5	10.5	7.5	11.5	↓			
	1	4	—	2,6,7,8,9,10	—	—	3	t _{ai} (4)	6.5	10.5	6.5	10.5	7.5	11.5				
	6	5	—	1,2,7,8,9,10	—	—	3	t _{as} (5)	8.5	11.5	8.5	11.5	10.0	15.0				
	1	4	—	2,6,7,8,9,10	—	—	3	t _{as} (4)	8.5	11.5	8.5	11.5	10.0	15.0				
Fall Time	6	5	—	1,2,7,8,9,10	—	—	3	t _f (5)	9.0	12.5	9.5	12.5	11.5	15.5	↓			
	1	4	—	2,6,7,8,9,10	—	—	3	t _f (4)	9.0	12.5	9.5	12.5	11.5	15.5				
6	5	—	1,2,7,8,9,10	—	—	3	t _f (5)	8.5	14.0	9.0	14.0	11.5	17.0	↓				
1	4	—	2,6,7,8,9,10	—	—	3	t _f (4)	8.5	14.0	9.0	14.0	11.5	17.0					

Pins not listed are left open.
 ⊕ Input voltage is adjusted to obtain dv/dV_{in} = 0. ⊕ Current test conditions: no load = 0; full load = -2.5 mAdc ±5%.

SWITCHING CHARACTERISTICS (10% to 90% distribution)

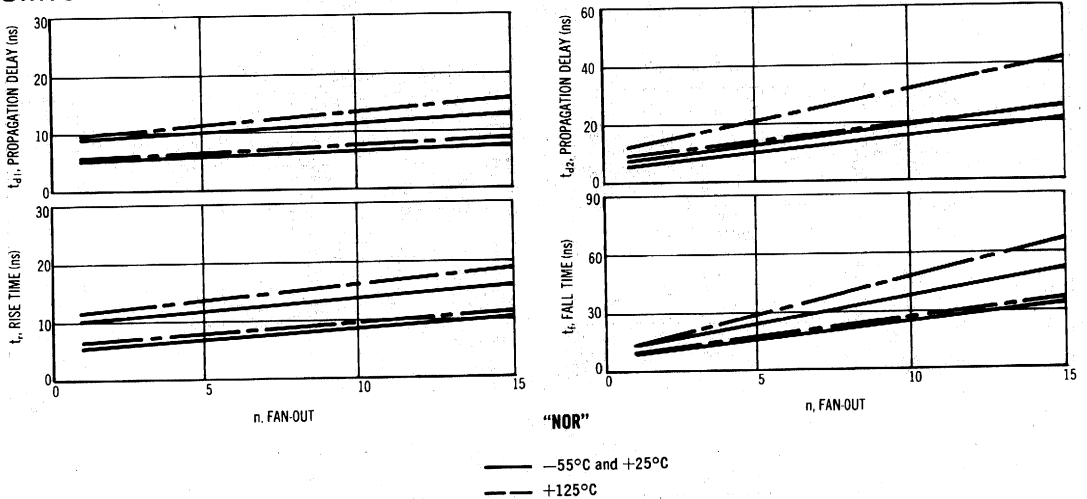


QUAD 2-INPUT GATE


MECL MC300 series

MC313F


Quad 2-input gate that provides the positive logic "NOR" function, and features an internal bias driver.

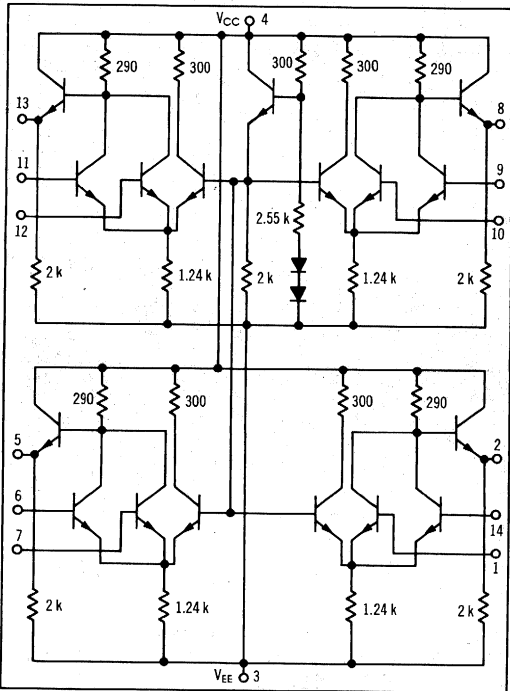


SWITCHING TIME TEST CIRCUIT

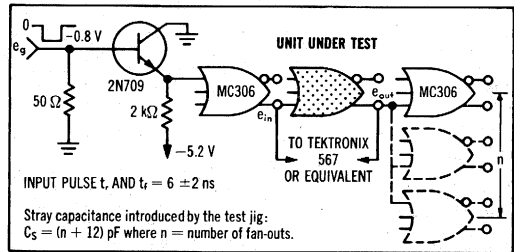


PROPAGATION DELAY




RISE AND FALL TIME



TYPICAL INPUT CHARACTERISTICS



TYPICAL OUTPUT CHARACTERISTICS





MC313F (continued)

ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions				dV _{in}	I _L	Ground	Symbol	Test Limits						Unit				
	V _{dc} ± 1%								-55°C		+25°C		+125°C						
	V _H	V _{I,max}	V _L	V _{EE}					Min	Max	Min	Max	Min	Max					
	Pin No	Pin No	Pin No	Pin No	Pin No	Pin No	Pin No	in ()											
Power Supply Drain Current	—	—	—	1,3,6,7,9,10,11,12,14	—	—	4	I _E (3)	—	31.0	—	30.0	—	29.0	mAdc				
Input Current	1	—	—	3,6,7,9,10,11,12,14	—	—	4	I _{in} (1)	—	—	—	100	—	—	μAdc				
	6	—	—	1,3,6,7,9,10,11,12,14	—	—	4	I _{in} (6)	—	—	—	—	—	↓					
	7	—	—	1,3,6,7,9,10,11,12,14	—	—	4	I _{in} (7)	—	—	—	—	↓						
	9	—	—	1,3,6,7,9,10,11,12,14	—	—	4	I _{in} (9)	—	—	—	—				↓			
	10	—	—	1,3,6,7,9,10,11,12,14	—	—	4	I _{in} (10)	—	—	—	—					↓		
	11	—	—	1,3,6,7,9,10,11,12,14	—	—	4	I _{in} (11)	—	—	—	—						↓	
	12	—	—	1,3,6,7,9,10,11,12,14	—	—	4	I _{in} (12)	—	—	—	—							↓
14	—	—	1,3,6,7,9,10,11,12,14	—	—	4	I _{in} (14)	—	—	—	—	—	↓						
"NOR" Logical "1" Output Voltage	—	—	1	3,6,7,9,10,11,12,14	—	—	4	V _I (2)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc				
	—	—	6	1,3,6,7,9,10,11,12,14	—	—	4	V _I (5)	↓	↓	↓	↓	↓	↓					
	—	—	7	1,3,6,7,9,10,11,12,14	—	—	4	V _I (5)	↓	↓	↓	↓	↓			↓			
	—	—	9	1,3,6,7,9,10,11,12,14	—	—	4	V _I (8)	↓	↓	↓	↓	↓				↓		
	—	—	10	1,3,6,7,9,10,11,12,14	—	—	4	V _I (8)	↓	↓	↓	↓	↓					↓	
	—	—	11	1,3,6,7,9,10,11,12,14	—	—	4	V _I (8)	↓	↓	↓	↓	↓						↓
	—	—	12	1,3,6,7,9,10,11,12,14	—	—	4	V _I (13)	↓	↓	↓	↓	↓						
—	—	14	1,3,6,7,9,10,11,12,14	—	—	4	V _I (13)	↓	↓	↓	↓	↓	↓	↓					
"NOR" Logical "0" Output Voltage	—	1	—	3,6,7,9,10,11,12,14	—	—	4	V _O (2)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc				
	—	6	—	1,3,6,7,9,10,11,12,14	—	—	4	V _O (5)	↓	↓	↓	↓	↓	↓					
	—	7	—	1,3,6,7,9,10,11,12,14	—	—	4	V _O (5)	↓	↓	↓	↓	↓			↓			
	—	9	—	1,3,6,7,9,10,11,12,14	—	—	4	V _O (8)	↓	↓	↓	↓	↓				↓		
	—	10	—	1,3,6,7,9,10,11,12,14	—	—	4	V _O (8)	↓	↓	↓	↓	↓					↓	
	—	11	—	1,3,6,7,9,10,11,12,14	—	—	4	V _O (8)	↓	↓	↓	↓	↓						↓
	—	12	—	1,3,6,7,9,10,11,12,14	—	—	4	V _O (13)	↓	↓	↓	↓	↓						
—	14	—	1,3,6,7,9,10,11,12,14	—	—	4	V _O (2)	↓	↓	↓	↓	↓	↓	↓					
"NOR" Output Voltage Change (No load to full load)	—	—	—	1,3,6,7,9,10,11,12,14	—	2⊙	4	ΔV _I (2)	—	-0.055	—	-0.055	—	-0.060	Volts				
	—	—	—	1,3,6,7,9,10,11,12,14	—	5⊙	4	ΔV _I (5)	—	↓	—	↓	—	↓		↓			
	—	—	—	1,3,6,7,9,10,11,12,14	—	8⊙	4	ΔV _I (8)	—	↓	—	↓	—	↓			↓		
	—	—	—	1,3,6,7,9,10,11,12,14	—	13⊙	4	ΔV _I (13)	—	↓	—	↓	—	↓				↓	
"NOR" Saturation Breakpoint Voltage	—	—	—	1,3,6,7,9,10,11,12,14	—	1⊙	4	V _I (2)	—	-0.40	—	-0.55	—	-0.68	Vdc				
	—	—	—	1,3,6,7,9,10,11,12,14	—	4	4	V _I (5)	—	↓	—	↓	—	↓		↓			
	—	—	—	1,3,6,7,9,10,11,12,14	—	7⊙	4	V _I (8)	—	↓	—	↓	—	↓			↓		
	—	—	—	1,3,6,7,9,10,11,12,14	—	10⊙	4	V _I (8)	—	↓	—	↓	—	↓				↓	
—	—	—	1,3,6,7,9,10,11,12,14	—	12⊙	4	4	V _I (13)	—	↓	—	↓	—	↓	↓				
Switching Time	Pulse In	Pulse Out	—	3,6,7,9,10,11,12,14	—	—	4	t _{ai} (2)	Typ	Max	Typ	Max	Typ	Max	ns				
									6.5	11.0	6.5	11.0	8.0	14.5					
	1	2							—	—	—	—	—	—		↓			
	6	5							—	—	—	—	—	↓					
	9	8							—	—	—	—	—				↓		
	11	13							—	—	—	—	—					↓	
	1	2							—	—	—	—	—						↓
6	5	—	—	—	—	—	↓												
Rise Time	1	2	—	3,6,7,9,10,11,12,14	—	—	4	t _r (2)	8.5	13.5	8.5	13.5	10.0	16.0					
									6	5	—	—	—	—	↓				
									9	8	—	—	—	—		↓			
									11	13	—	—	—	—			↓		
Fall Time	6	5	—	3,6,7,9,10,11,12,14	—	—	4	t _f (5)	8.5	12.5	9.0	12.5	11.0	15.5					
									9	8	—	—	—	—	↓				
									11	13	—	—	—	—		↓			
									6	5	—	—	—	—			↓		
Fall Time	1	2	—	3,6,7,9,10,11,12,14	—	—	4	t _f (2)	9.0	14.0	9.5	14.0	11.5	17.0					
									6	5	—	—	—	—	↓				
									9	8	—	—	—	—		↓			
									11	13	—	—	—	—			↓		

Pins not listed are left open ⊙ Input voltage is adjusted to obtain dV "NOR" / dV_{in} = 0. ⊙ Current test conditions: no load = 0; full load = -2.5 mAdc ± 5%.

SWITCHING CHARACTERISTICS (10% to 90% distribution)

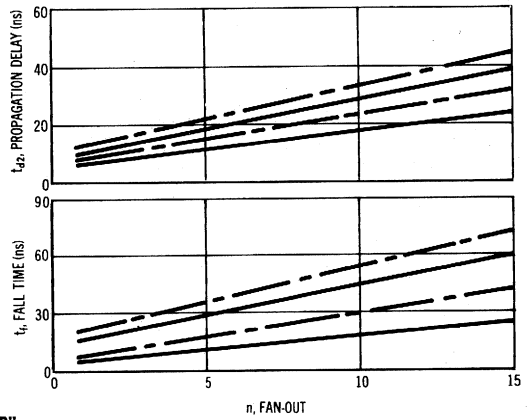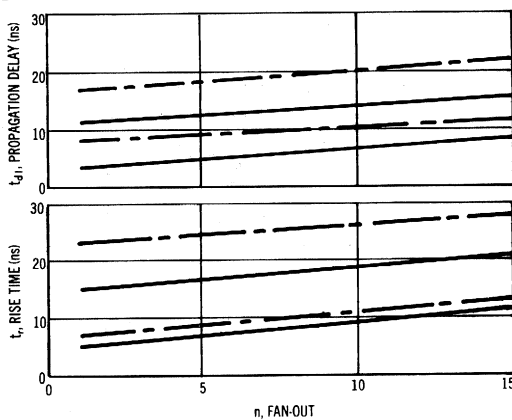


— — — -55°C and +25°C
 - - - - +125°C

R-S FLIP-FLOP


MECL MC300 series

MC302


DC Set-Reset flip-flop with an expandable input and buffered outputs.

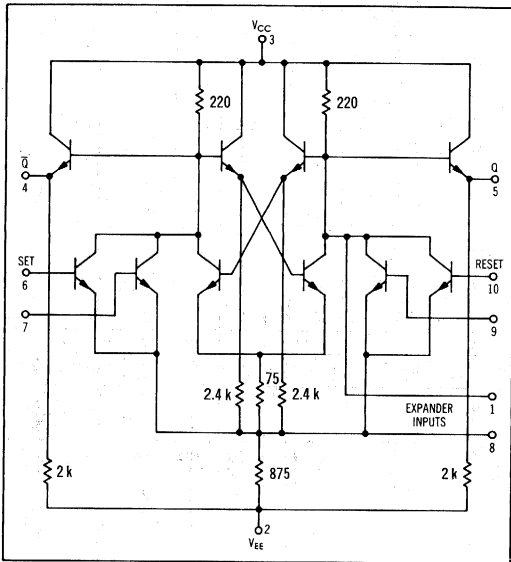


SWITCHING TIME TEST CIRCUIT

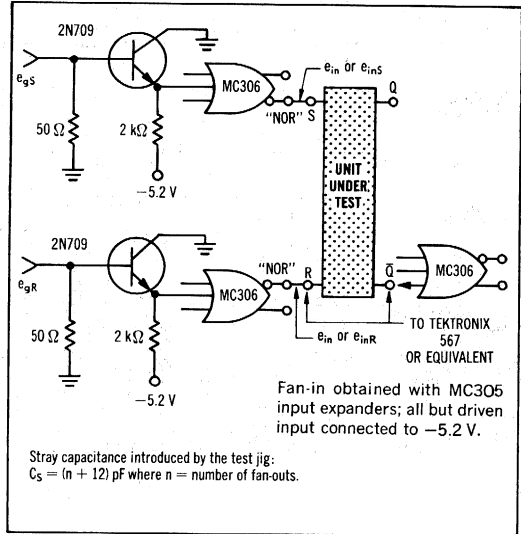

TRANSFER CHARACTERISTICS

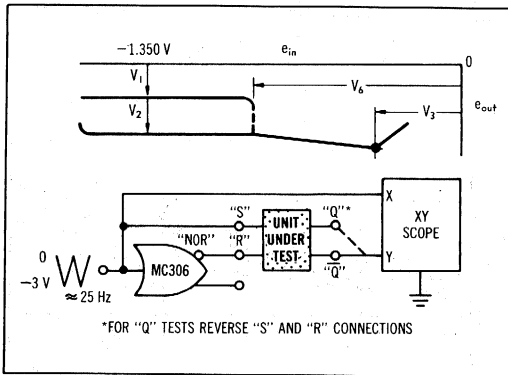

SWITCHING TIME WAVEFORMS

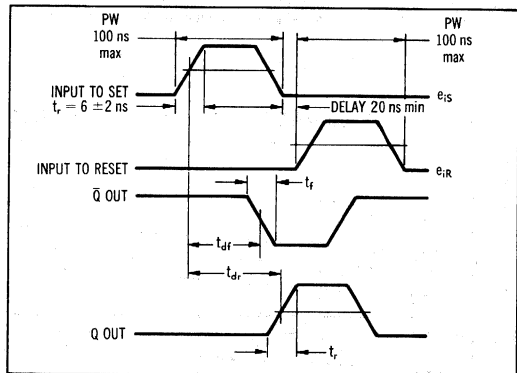


MC302 (continued)

ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions V _{dc} ± 1%				dV _{in} Pin No	L _i Pin No	Ground Pin No	Symbol Pin No in ()	Test Limits						Unit	
	@ Test Temperature								-55°C		+25°C		+125°C			
	Pin No	V _I Pin No	V _I Pin No	V _I Pin No					Min	Max	Min	Max	Min	Max		
Power Supply Drain Current	—	—	—	—	2,6,7,9,10	—	—	3	I _e (6)	—	10.35	—	10.35	—	9.52	mAdc
Input Current	6	—	—	—	2,7,9,10	—	—	3	I _{in} (6)	—	—	—	100	—	—	μAdc
	7	—	—	—	2,6,9,10	—	—	3	I _{in} (7)	—	—	—	—	—	—	↓
	9	—	—	—	2,6,7,10	—	—	3	I _{in} (9)	—	—	—	—	—	—	↓
	10	—	—	—	2,6,7,9	—	—	3	I _{in} (10)	—	—	—	—	—	—	↓
"Q" Logical "1" Output Voltage	—	—	6Ⓞ	—	2,7,9,10	—	—	3	V ₁ (5)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc
	—	—	7Ⓞ	—	2,6,9,10	—	—	3	V ₁ (5)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc
"Q" Logical "0" Output Voltage	—	—	9Ⓞ	—	2,6,7,10	—	—	3	V ₂ (5)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc
	—	—	10Ⓞ	—	2,6,7,9	—	—	3	V ₂ (5)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc
"Q̄" Logical "1" Output Voltage	—	—	9Ⓞ	—	2,6,7,10	—	—	3	V ₁ (4)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc
	—	—	10Ⓞ	—	2,6,7,9	—	—	3	V ₁ (4)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc
"Q̄" Logical "0" Output Voltage	—	—	6Ⓞ	—	2,7,9,10	—	—	3	V ₂ (4)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc
	—	—	7Ⓞ	—	2,6,9,10	—	—	3	V ₂ (4)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc
"Q" Output Voltage Change	—	6	—	—	2,7,9,10	—	5Ⓞ	3	ΔV ₁ (5)	—	-0.055	—	-0.055	—	-0.060	Volts
"Q̄" Output Voltage Change	—	10	—	—	2,6,7,9	—	4Ⓞ	3	ΔV ₁ (4)	—	-0.055	—	-0.055	—	-0.060	Volts
"Q" Saturation Breakpoint Voltage	—	—	—	—	2,7,9	6,10Ⓞ	—	3	V ₃ (5)	—	-0.50	—	-0.65	—	-0.75	Vdc
"Q̄" Saturation Breakpoint Voltage	—	—	—	—	2,7,9	6,10Ⓞ	—	3	V ₃ (4)	—	-0.50	—	-0.65	—	-0.75	Vdc
"Q" or "Q̄" Latch Voltage	—	—	—	—	2,7,9	6,10Ⓞ	—	3	V ₄ (6,10)	-1.16	-1.34	-1.09	-1.21	-0.93	-1.07	Vdc
Switching Times	Pulse In	Pulse Out								Typ	Max	Typ	Max	Typ	Max	ns
	Propagation Delay Time	6,10	4,5	—	2,7,9	—	—	3	t _{pd} (4,5)	9.0	14.0	10.5	16.0	22.0	29.0	
		6,10	4,5	—	2,7,9	—	—	3	t _{pd} (4,5)	8.5	14.0	11.5	19.5	16.0	24.0	
	Rise Time	6,10	4,5	—	2,7,9	—	—	3	t _r (4,5)	9.0	15.0	11.5	19.0	23.0	31.0	
Fall Time	6,10	4,5	—	2,7,9	—	—	3	t _f (4,5)	7.0	13.0	12.5	19.5	18.0	29.0		


Pins not listed are left open. Ⓞ Input voltage is adjusted to obtain dV "Q" / dV_{in} = 0; dV "Q̄" / dV_{in} = 0. Ⓞ Current test conditions: no load = 0; full load = -2.5 mAdc ± 5%.
 Ⓞ Apply momentary V_{I,max} to set output, then V_I for measurement. Ⓞ Input voltage is adjusted to obtain dV₁ / dV_{in} = ∞.

SWITCHING CHARACTERISTICS (10% to 90% distribution)

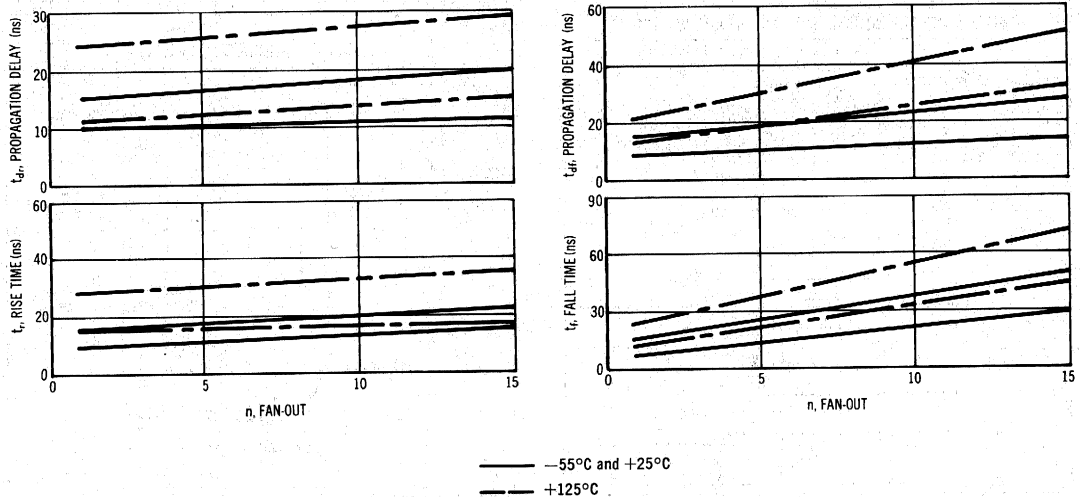

MC308

AC-coupled J-K flip-flop with dc Set and Reset inputs and buffered outputs for counter and shift register applications up to 15 MHz.

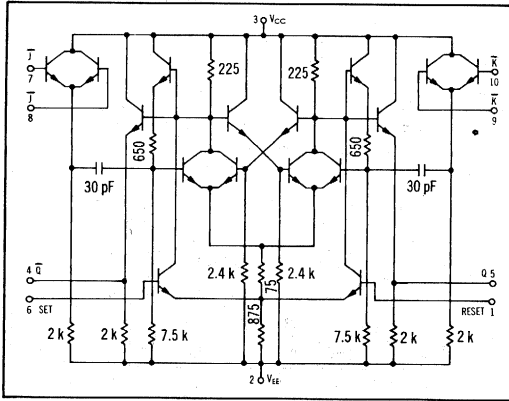

TRANSFER CHARACTERISTICS

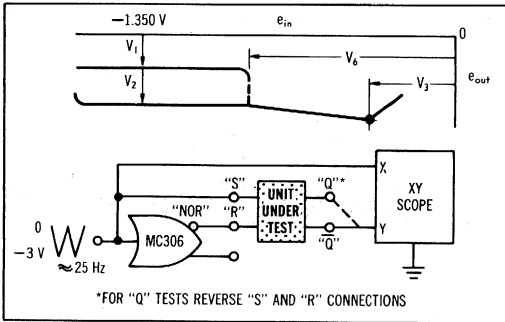


FIGURE 1 - SWITCHING TIME TEST CIRCUIT AND WAVEFORMS

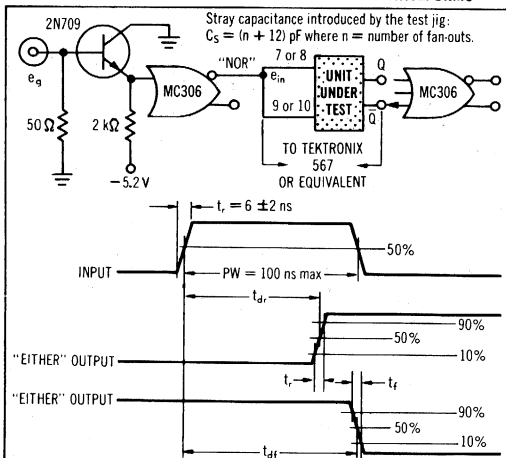


FIGURE 2 - INPUT WAVEFORM TO ESTABLISH MINIMUM TOGGLE FREQUENCY




FIGURE 3 - SENSITIVITY (NO TOGGLE)


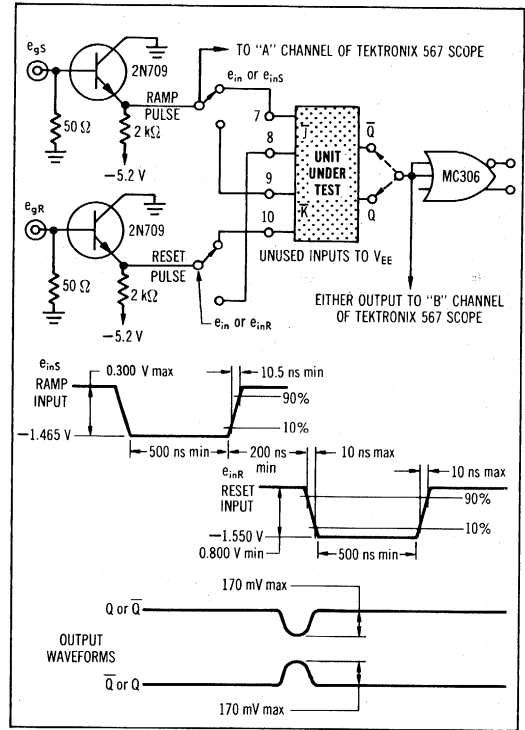


FIGURE 4 - SENSITIVITY (TOGGLE)

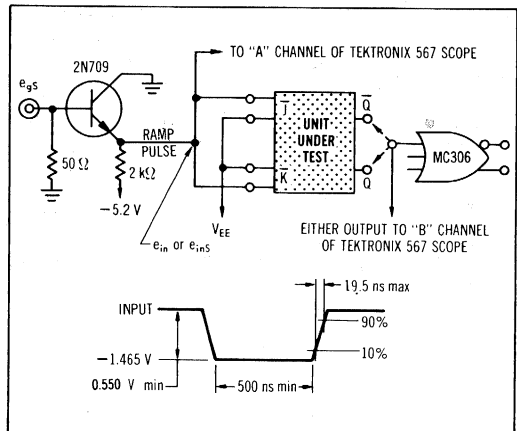


ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions Vdc ± 1%				dV _{in} Pin No	I _L Pin No	Ground Pin No	Symbol Pin No in ()	Test Limits						Unit
	@ Test Temperature		Vdc ± 1%						-55°C		+25°C		+125°C		
	-55°C	+25°C	+125°C	Min					Max	Min	Max	Min	Max		
Power Supply Drain Current	—	7.10	—	1,2,6,8,9	—	—	3	I _q (2)	—	22.0	—	21.0	—	19.5	mAdc
Input Current	7	—	—	1,2,6,8,9,10	—	—	3	I _{in} (7)	—	—	—	100	—	—	μAdc
	8	—	—	1,2,6,7,9,10	—	—	3	I _{in} (8)	—	—	—	—	—	—	↓
	9	—	—	1,2,6,7,8,10	—	—	3	I _{in} (9)	—	—	—	—	—	—	↓
	10	—	—	1,2,6,7,8,9	—	—	3	I _{in} (10)	—	—	—	—	—	—	↓
"Q" Logical "1" Output Voltage	—	—	6Ⓢ	1,2,7,8,9,10	—	—	3	V ₁ (5)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc
"Q" Logical "0" Output Voltage	—	—	1Ⓢ	2,6,7,8,9,10	—	—	3	V ₂ (5)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc
"Q̄" Logical "1" Output Voltage	—	—	1Ⓢ	2,6,7,8,9,10	—	—	3	V ₁ (4)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc
"Q̄" Logical "0" Output Voltage	—	—	6Ⓢ	1,2,7,8,9,10	—	—	3	V ₂ (4)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc
"Q" Output Voltage Change	—	6	—	1,2,7,8,9,10	—	5Ⓢ	3	ΔV ₁ (5)	—	-0.055	—	-0.055	—	-0.060	Volts
"Q̄" Output Voltage Change	—	1	—	2,6,7,8,9,10	—	4Ⓢ	3	ΔV ₂ (4)	—	-0.055	—	-0.055	—	-0.060	Volts
"Q" Saturation Breakpoint Voltage	—	—	—	1,2,7,8,9,10	6Ⓢ	—	3	V ₃ (5)	—	-0.50	—	-0.65	—	-0.75	Vdc
"Q̄" Saturation Breakpoint Voltage	—	—	—	2,6,7,8,9,10	1Ⓢ	—	3	V ₃ (4)	—	-0.50	—	-0.65	—	-0.75	Vdc
"Q" or "Q̄" Latch Voltage	—	—	—	2,7,8,9,10	1,6Ⓢ	—	3	V ₄ (1,6)	-1.16	-1.34	-1.09	-1.21	-0.93	-1.07	Vdc
Toggle Frequency (See Figures 1 and 2)	Pulse In	Pulse Out	—	1,2,6,9	—	—	3	f _{reg}	—	—	15	—	—	—	MHz
	7.10	5	—	1,2,6,9	—	—	3		←	←	←	←	←	←	
	7.10	4	—	1,2,6,8,9	—	—	3		←	←	←	←	←	←	
Sensitivity (No Toggle)	7.10	4	—	1,2,6,8,9	—	—	3		←	←	←	←	←	←	
Sensitivity (Toggle)	8.9	5	—	1,2,6,7,10	—	—	3		←	←	←	←	←	←	
Switching Times	7.10	4.5	—	1,2,6,8,9	—	—	3		←	←	←	←	←	←	
	Propagation Delay	7.10	4.5	—	1,2,6,8,9	—	3	t _{dr} (4,5)	Typ	Max	Typ	Max	Typ	Max	ns
	Rise Time	7.10	4.5	—	1,2,6,8,9	—	3	t _r (4,5)	7.0	11.5	7.0	12.5	9.5	18.5	
	Fall Time	7.10	4.5	—	1,2,6,8,9	—	3	t _f (4,5)	8.5	14.0	8.5	14.5	10.0	16.5	
		7.10	4.5	—	1,2,6,8,9	—	3	t _r (4,5)	6.5	13.0	6.5	13.0	10.0	18.5	
	7.10	4.5	—	1,2,6,8,9	—	3	t _f (4,5)	7.5	14.5	8.5	15.5	11.5	20.0		

Pins not listed are left open. ① Input voltage is adjusted to obtain dV_{in}/dV_{in} = 0. ② Current test conditions: no load = 0 to full load = -2.5 mAdc ± 5%.
 ③ Apply momentary V_{1max} to set output, then V_{1in} for measurement. ④ Input voltage is adjusted to obtain dV₁/dV_{1in} = ∞.


SWITCHING CHARACTERISTICS (10% to 90% distribution)

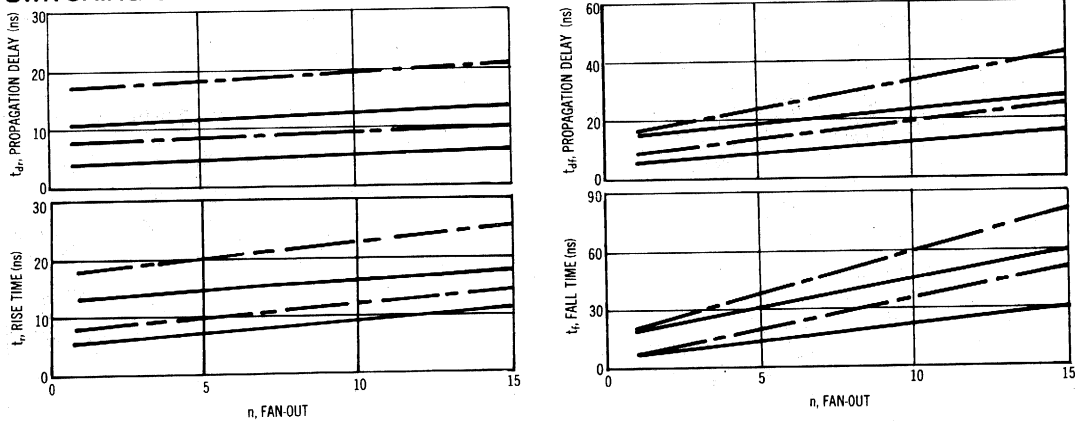

— — -55°C and +25°C
 - - - +125°C

MC314

High-speed ac-coupled J-K flip-flop with dc Set and Reset input for counter and shift register applications up to 30 MHz operation.

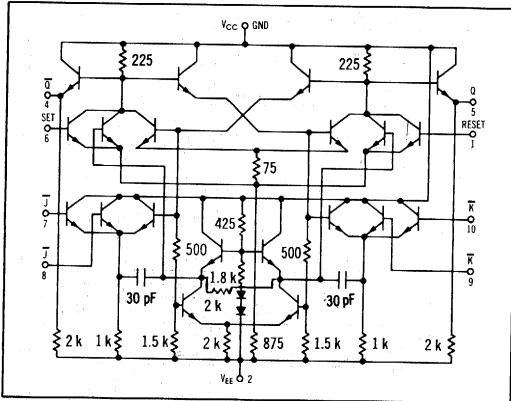

TRANSFER CHARACTERISTICS

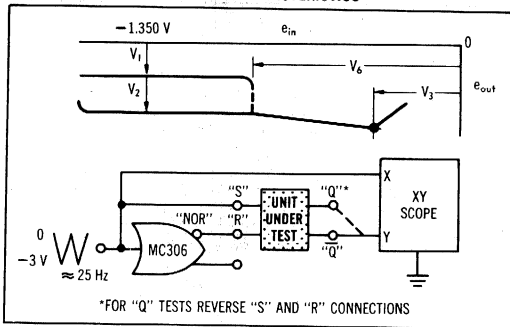


FIGURE 1 - SWITCHING TIME TEST CIRCUIT AND WAVEFORMS

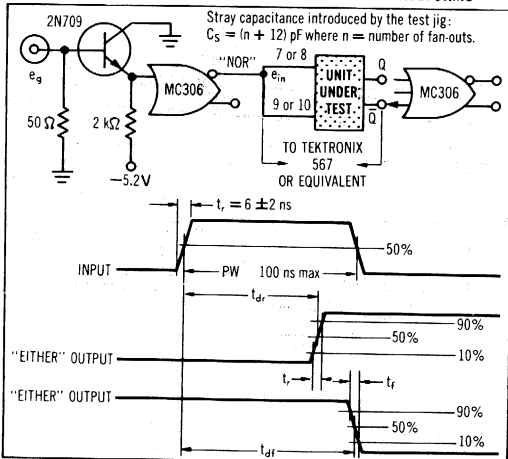


FIGURE 2 - INPUT WAVEFORM TO ESTABLISH MINIMUM TOGGLE FREQUENCY

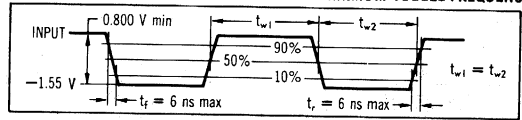


FIGURE 3 - SENSITIVITY (NO TOGGLE)


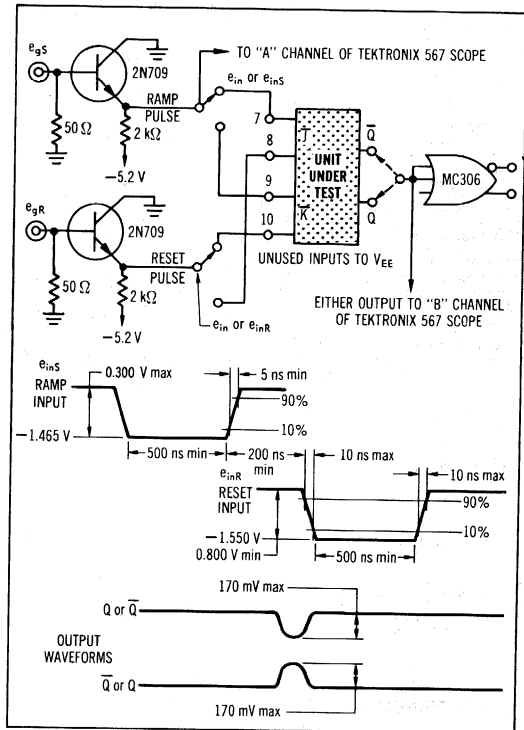


FIGURE 4 - SENSITIVITY (TOGGLE)

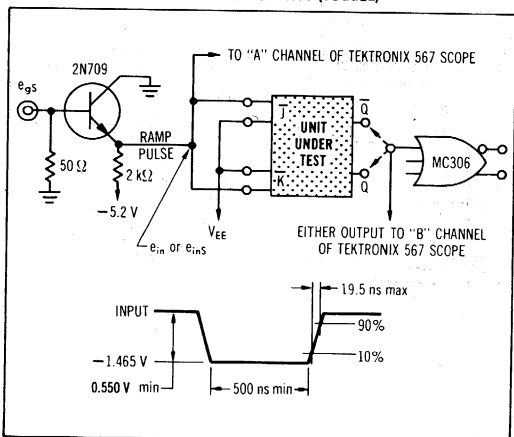


MC314 (continued)

ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions V _{dc} ± 1%						Symbol Pin No in ()	Test Limits						Unit	
	V _H Pin No	V _I max Pin No	V _L Pin No	V _{EE} Pin No	dV _{in} Pin No	I _L Pin No		Ground Pin No	-55°C		+25°C		+125°C		
									Min	Max	Min	Max	Min		Max
Power Supply Drain Current	—	7,10	—	1,2,6,8,9	—	—	3	I _E (2)	—	28.5	—	28.5	—	27.5	mAdc
Input Current	7	—	—	1,2,6,8,9,10	—	—	3	I _{in} (7)	—	—	—	100	—	—	μAdc
	8	—	—	1,2,6,7,9,10	—	—	3	I _{in} (8)	—	—	—	—	—	—	—
	9	—	—	1,2,6,7,8,10	—	—	3	I _{in} (9)	—	—	—	—	—	—	—
	10	—	—	1,2,6,7,8,9	—	—	3	I _{in} (10)	—	—	—	—	—	—	—
"Q" Logical "1" Output Voltage	—	—	6 ⊕	1,2,7,8,9,10	—	—	3	V ₁ (5)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc
"Q" Logical "0" Output Voltage	—	—	1 ⊕	2,6,7,8,9,10	—	—	3	V ₂ (5)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc
"Q̄" Logical "1" Output Voltage	—	—	1 ⊕	2,6,7,8,9,10	—	—	3	V ₁ (4)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc
"Q̄" Logical "0" Output Voltage	—	—	6 ⊕	1,2,7,8,9,10	—	—	3	V ₂ (4)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc
"Q" Output Voltage Change	—	6	—	1,2,7,8,9,10	—	5 ⊕	3	ΔV ₁ (5)	—	-0.055	—	-0.055	—	-0.060	Volts
"Q̄" Output Voltage Change	—	1	—	2,6,7,8,9,10	—	4 ⊕	3	ΔV ₁ (4)	—	-0.055	—	-0.055	—	-0.060	Volts
"Q" Saturation Breakpoint Voltage	—	—	—	1,2,7,8,9,10	6 ⊕	—	3	V ₃ (5)	—	-0.50	—	-0.65	—	-0.75	Vdc
"Q̄" Saturation Breakpoint Voltage	—	—	—	2,6,7,8,9,10	1 ⊕	—	3	V ₃ (4)	—	-0.50	—	-0.65	—	-0.75	Vdc
"Q" or "Q̄" Latch Voltage	—	—	—	2,7,8,9,10	1,6 ⊕	—	3	V ₆ (1,6)	-1.16	-1.34	-1.09	-1.21	-0.93	-1.07	Vdc
Toggle Frequency (See Figures 1 and 2)	Pulse In	Pulse Out	—	1,2,6,9	—	—	3	f _{toq}	—	—	30	—	—	—	MHz
	7,10	5	—	1,2,6,9	—	—	3		—	—	—	—	—	—	—
Sensitivity (No Toggle)	7,10	4	—	1,2,6,8,9	—	—	3		—	—	—	—	—	—	—
	8,9	5	—	1,2,6,7,10	—	—	3		—	—	—	—	—	—	—
Sensitivity (Toggle)	7,10	4,5	—	1,2,6,8,9	—	—	3		—	—	—	—	—	—	—
Switching Times															
Propagation Delay Time	7,10	4,5	—	1,2,6,8,9	—	—	3	t _{er} (4,5)	11.0	16.0	12.0	16.0	14.0	24.0	ns
	7,10	4,5	—	1,2,6,8,9	—	—	3	t _{er} (4,5)	12.0	16.0	13.0	16.0	15.0	24.0	
Rise Time	7,10	4,5	—	1,2,6,8,9	—	—	3	t _r (4,5)	11.5	16.0	12.5	16.0	15.0	26.0	
	7,10	4,5	—	1,2,6,8,9	—	—	3	t _r (4,5)	11.5	16.0	12.5	16.0	15.0	26.0	

Pins not listed are left open. ⊕ Input voltage is adjusted to obtain dV_{out}/dV_{in} = 0. ⊙ Current test conditions: no load = 0; full load = -2.5 mAdc ± 5%.
 ⊙ Apply momentary V_{I max} to set output, then V_{in} for measurement. ⊙ Input voltage is adjusted to obtain dV₁/dV_{in} = ∞.

SWITCHING CHARACTERISTICS (10% to 90% distribution)

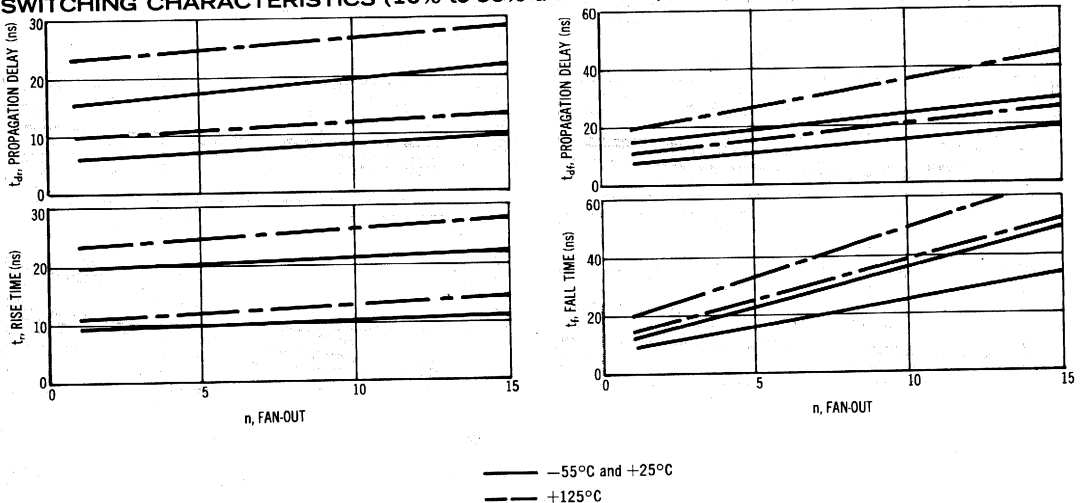


ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions						Test Limits						Unit			
	Vdc ± 1%						Temperature									
	V _{I1} Pin No	V _{I,max} Pin No	V _I Pin No	V _{EE} Pin No	V _{BB} Pin No	dV _{Iin} Pin No	I _L Pin No	Ground Pin No	Symbol Pin No in ()	-55°C Min	-55°C Max	+25°C Min		+25°C Max	+125°C Min	+125°C Max
Power Supply Drain Current	—	—	—	2,7,8,9,10	1	—	—	3	I _E (2)	—	15.3	—	15.3	—	14.1	mAdc
Input Current	7	—	—	2,8,9,10	1	—	—	3	I _I (7)	—	—	—	100	—	—	μAdc
	8	—	—	2,7,9,10	1	—	—	3	I _I (8)	—	—	—	—	—	—	—
	9	—	—	2,7,8,10	1	—	—	3	I _I (9)	—	—	—	—	—	—	—
	10	—	—	2,7,8,9	1	—	—	3	I _I (10)	—	—	—	—	—	—	—
"NOR" Logical "1" Output Voltage	—	—	9	2,7,8,10	1	—	—	3	V _I (5)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc
	—	—	10	2,7,8,9	1	—	—	3	V _I (5)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc
"NOR" Logical "0" Output Voltage	—	9	—	2,7,8,10	1	—	—	3	V _A (5)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc
	—	10	—	2,7,8,9	1	—	—	3	V _A (5)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc
"CARRY" Logical "1" Output Voltage	—	—	7	2,8,9,10	1	—	—	3	V _I (6)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc
	—	—	8	2,7,9,10	1	—	—	3	V _I (6)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc
"CARRY" Logical "0" Output Voltage	—	7	—	2,8,9,10	1	—	—	3	V _A (6)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc
	—	8	—	2,7,9,10	1	—	—	3	V _A (6)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc
"SUM" Logical "1" Output Voltage	—	7,9	—	2,8,10	1	—	—	3	V _E (4)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc
	—	8,10	—	2,7,9	1	—	—	3	V _E (4)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	Vdc
"SUM" Logical "0" Output Voltage	—	7	10	2,8,9	1	—	—	3	V ₂ (4)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc
	—	8	10	2,7,9	1	—	—	3	V ₂ (4)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	Vdc
	—	9	8	2,7,10	1	—	—	3	V ₂ (4)	↓	↓	↓	↓	↓	↓	Vdc
	—	10	7	2,8,9	1	—	—	3	V ₂ (4)	↓	↓	↓	↓	↓	↓	Vdc
"NOR" Output Voltage Change (No load to full load)	—	10	—	2,7,8,9	1	—	5Ⓞ	3	ΔV _I (5)	—	-0.055	—	-0.055	—	-0.060	Volts
"CARRY" Output Voltage Change (No load to full load)	—	—	7	2,8,9,10	1	—	6Ⓞ	3	ΔV _I (6)	—	-0.055	—	-0.055	—	-0.060	Volts
"SUM" Output Voltage Change (No load to full load)	—	7,10	—	2,8,9	1	—	4Ⓞ	3	ΔV _E (4)	—	-0.055	—	-0.055	—	-0.060	Volts
"NOR" Saturation Breakpoint Voltage	—	—	—	2,7,8,9	1	10Ⓞ	—	3	V _I (5)	—	-0.40	—	-0.55	—	-0.65	Vdc
"CARRY" Saturation Breakpoint Voltage	—	—	—	2,8,9,10	1	7Ⓞ	—	3	V _I (6)	—	-0.40	—	-0.55	—	-0.65	Vdc
Switching Times										Typ	Max	Typ	Max	Typ	Max	
Propagation Delay Time	—	—	—	2,7,8,9	1	10	5	3	t _{pd} (5)	6.0	10.0	6.0	11.0	7.5	13.0	ns
	—	—	—	2,8,9,10	1	7	6	3	t _{pd} (6)	6.0	10.0	6.0	11.0	7.5	13.0	
	—	7	—	2,8,9	1	10	4	3	t _{pd} (4)	8.0	12.0	8.0	12.0	10.5	17.0	
	—	—	—	2,7,8,9	1	10	5	3	t _{pd} (5)	7.5	10.5	7.5	11.0	10.0	15.0	
	—	—	—	2,8,9,10	1	7	6	3	t _{pd} (6)	7.5	10.5	7.5	11.0	10.0	15.0	
	—	7	—	2,8,9	1	10	4	3	t _{pd} (4)	5.5	8.0	5.5	8.5	7.5	12.0	
Rise Time	—	—	—	2,7,8,9	1	10	5	3	t _r (5)	6.0	11.5	6.5	12.0	7.5	14.0	
	—	—	—	2,8,9,10	1	7	6	3	t _r (6)	6.0	11.5	6.5	12.0	7.5	14.0	
	—	7	—	2,8,9	1	10	4	3	t _r (4)	6.0	10.0	6.5	11.0	10.0	16.0	
	—	—	—	2,7,8,9	1	10	5	3	t _r (5)	7.5	12.0	8.0	13.5	10.5	16.5	
	—	—	—	2,8,9,10	1	7	6	3	t _r (6)	7.5	12.0	8.0	13.5	10.5	16.5	
	—	7	—	2,8,9	1	10	4	3	t _r (4)	8.0	12.5	8.5	13.5	11.0	18.0	

Pins not listed are left open. Ⓞ Input voltage is adjusted to obtain dV_I"NOR"/dV_{Iin} = 0 or dV_I"CARRY"/dV_{Iin} = 0.
 Ⓞ Current test conditions: no load = 0, full load = -2.5 mAdc ±5%.

SWITCHING CHARACTERISTICS (10% to 90% distribution)

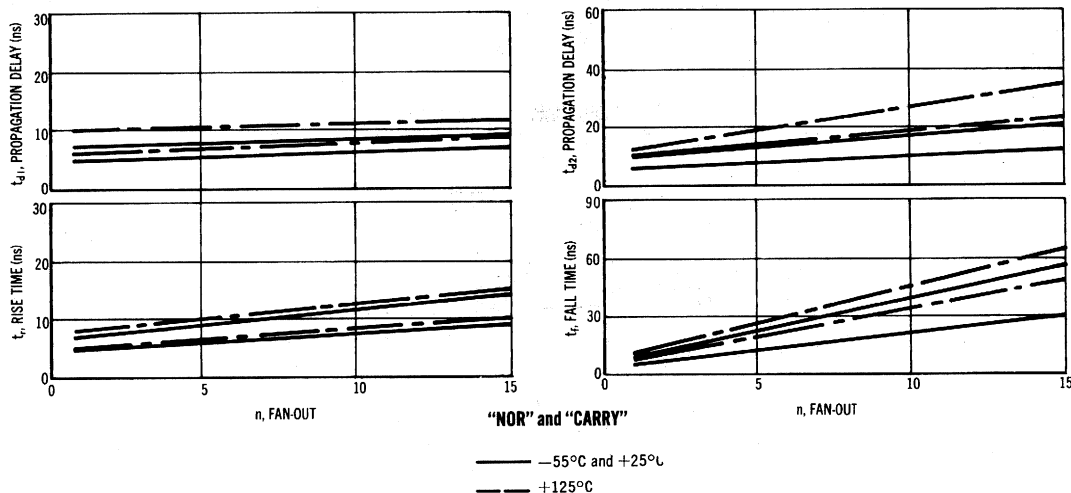


GATE EXPANDER

MECL MC300 series

MC305

A 5-input expander for use with the MC302, MC306, MC307, and MC315. Each expander unit increases the fan-in of the basic gate by five.

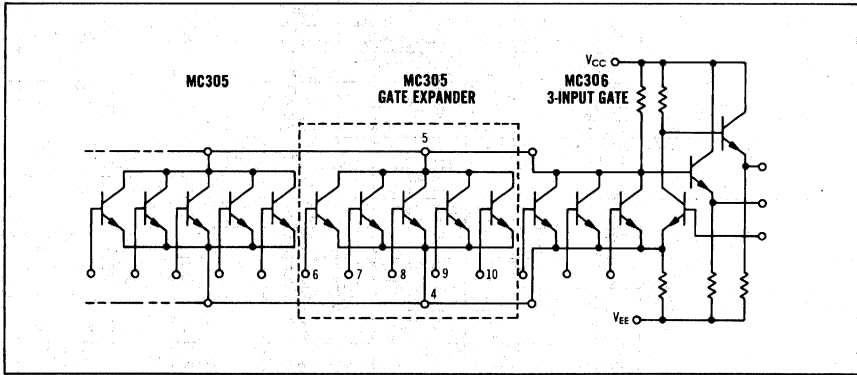


ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions						Ground Pin No	Symbol Pin No in ()	Test Limits						Unit	
	Vdc ± 1%								-55°C		+25°C		+125°C			
	V _{EE} Pin No	V _{BB} Pin No	V _{CC} Pin No	V _{CB} Pin No	V _{BE} Pin No	I _E Pin No			Min	Max	Min	Max	Min	Max		
Base Leakage Current	4 4 4 4	6 7 8 9 10	— — — —	— — — —	— — — —	— — — —	5 5 5 5	I _{bl} (6) I _{bl} (7) I _{bl} (8) I _{bl} (9) I _{bl} (10)	— — — — —	0.5 ↓ — — —	— — — — —	0.5 ↓ — — —	— — — — —	2.0 ↓ — — —	μAdc ↓ — — —	
Collector Leakage Current	—	—	5	—	6,7,8,9,10	—	4	I _{ccx} (5)	—	1.0	—	1.0	—	100.0	μAdc	
Input Voltage	—	—	—	5 5 5 5	—	—	4 7 8 9 10	V _{ae} (4) V _{ae} (4) V _{ae} (4) V _{ae} (4) V _{ae} (4)	— — — — —	-0.810 ↓ — — —	-0.880 ↓ — — —	-0.680 ↓ — — —	-0.730 ↓ — — —	-0.490 ↓ — — —	-0.540 ↓ — — —	Vdc ↓ — — —
Switching Times	Pulse In	Pulse Out	—	—	—	—	—	t _{dr} t _{dz} t _r t _f	Typ	Max	Typ	Max	Typ	Max	ns	
Propagation Delay Time	8	①	—	—	—	—	—	t _{dr}	5.0	8.0	5.0	8.5	5.5	9.5	↓	
Rise Time	8	①	—	—	—	—	—	t _r	8.0	10.5	8.5	11.5	6.5	13.0		
Fall Time	8	①	—	—	—	—	—	t _f	3.0	8.5	3.5	8.5	4.5	9.5		

Pins not listed are left open. ① See Switching Time Test Circuit.

SWITCHING TIME TEST CIRCUIT

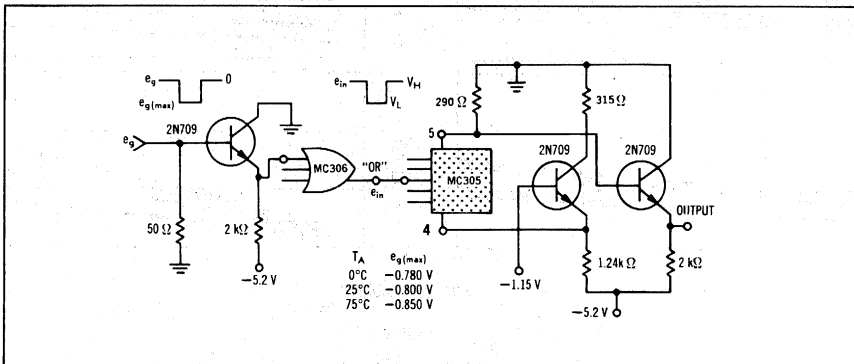


BIAS DRIVER

MECL MC300 series

MC304

Bias driver that compensates for changes in circuit parameters with temperature.

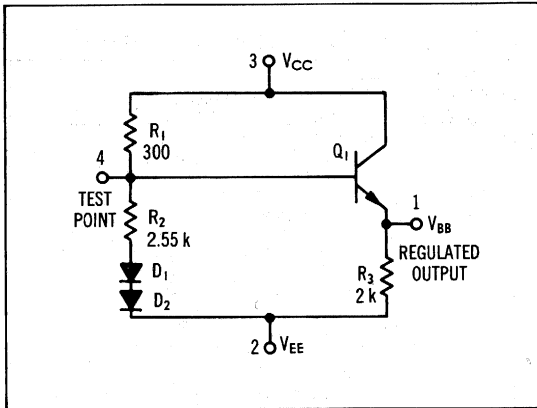

ELECTRICAL CHARACTERISTICS

Characteristic	V_{EE} Pin No	I_L Pin No	Ground Pin No	Symbol Pin No in ()	Test Limits						Unit
					-55°C		+25°C		+125°C		
					Min	Max	Min	Max	Min	Max	
Power Supply Drain Current	2	—	3	$I_E(2)$	—	4.4	—	4.4	—	4.0	mAdc
Output Voltage	2	1 ⊕	3	V_{BB}	-1.19	-1.32	-1.09	-1.22	-0.95	-1.08	Vdc

Pins not listed are left open.

⊕ Current test conditions: no load = 0; full load = -2.5 mAdc ±5%.

@ Test Temperature {
-55°C
+25°C
+125°C

Test Conditions
 $V_{dc} \pm 1\%$

-5.20
-5.20
-5.20

CIRCUIT DESCRIPTION

Circuit Operation:

The divider network R_1 , R_2 , D_1 , D_2 compensates for temperature variations of the base-emitter voltages of Q_1 , and of the driven gates, producing a bias voltage for the MECL logic circuits that maintains a constant set of dc operating conditions over the temperature range of -55 to +125°C. In addition, compensation for power supply variations is achieved, since the bias output voltage is derived from the system supply.

Either of the supply voltage nodes may be used as ground, however the ground potential of the bias driver must coincide with that of the logic system. Thus, if V_{CC} is grounded in the logic system, then —

$$V_{CC} = 0; \quad V_{EE} = -5.2 \text{ V};$$



$$V_{BB} = -1.15 \text{ nominal output voltage at } 25^\circ\text{C}$$

LINE DRIVER

MECL MC300 series

MC315

Line driver for driving lines of 93 ohms or greater while providing the positive logic "NOR" function and its complement simultaneously.

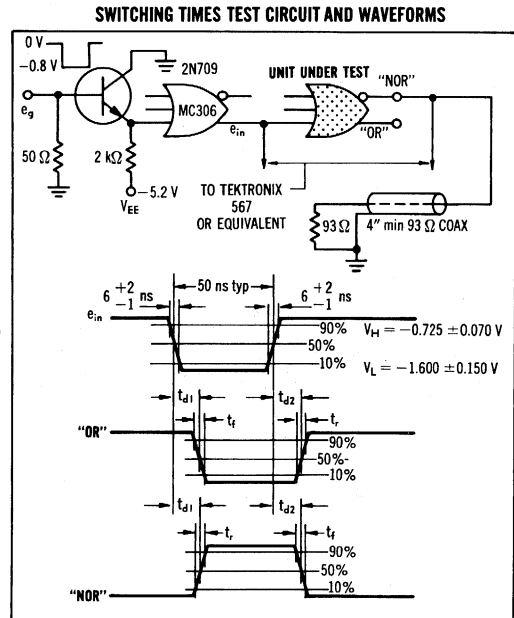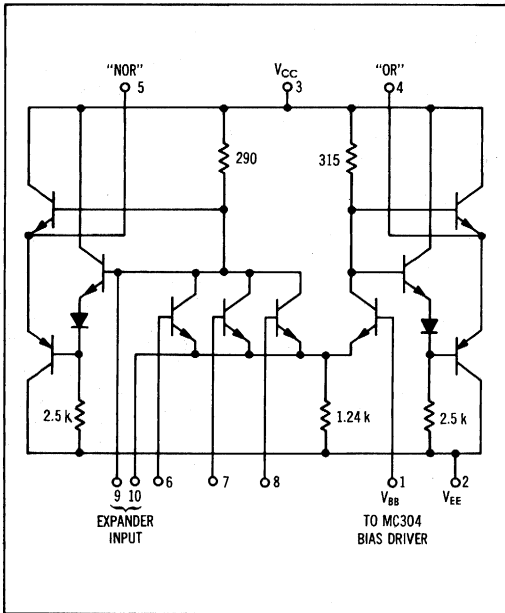

ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions					I _l (1)	Ground	Symbol	Test Limits						Unit	
	V _{dc} ± 1%								Pin No							
	V _H	V _{I max}	V _L	V _{EE}	V _{BB}				-55°C		+25°C		+125°C			
Pin No	Pin No	Pin No	Pin No	Pin No	Pin No	Pin No	Min	Max	Min	Max	Min	Max				
Power Supply Drain Current	—	—	—	2,6,7,8	1	4,5	3	I _d (2)	—	45	—	45	—	45	mAdc	
Input Current	6	—	—	2,7,8	1	—	3	I _{in} (6)	—	—	—	100	—	—	μAdc	
	7	—	—	2,6,8	1	—	3	I _{in} (7)	—	—	—	—	—	—	μAdc	
	8	—	—	2,6,7	1	—	3	I _{in} (8)	—	—	—	—	—	—	μAdc	
"NOR" Logical "1" Output Voltage	—	—	—	6	2,7,8	1	4,5	3	V _o (6)	-0.805	-0.945	-0.670	-0.795	-0.505	-0.655	Vdc
	—	—	—	7	2,6,8	1	4,5	3	V _o (7)	—	—	—	—	—	—	Vdc
	—	—	—	8	2,6,7	1	4,5	3	V _o (8)	—	—	—	—	—	—	Vdc
"NOR" Logical "0" Output Voltage	—	6	—	2,7,8	1	4,5	3	3	V _o (6)	-1.540	-1.850	-1.450	-1.750	-1.320	-1.675	Vdc
	—	7	—	2,6,8	1	4,5	3	3	V _o (7)	—	—	—	—	—	—	Vdc
	—	8	—	2,6,7	1	4,5	3	3	V _o (8)	—	—	—	—	—	—	Vdc
"OR" Logical "1" Output Voltage	—	6	—	2,7,8	1	4,5	3	3	V _o (6)	-0.805	-0.945	-0.670	-0.795	-0.505	-0.655	Vdc
	—	7	—	2,6,8	1	4,5	3	3	V _o (7)	—	—	—	—	—	—	Vdc
	—	8	—	2,6,7	1	4,5	3	3	V _o (8)	—	—	—	—	—	—	Vdc
"OR" Logical "0" Output Voltage	—	6	—	2,7,8	1	4,5	3	3	V _o (6)	-1.540	-1.850	-1.450	-1.750	-1.320	-1.675	Vdc
	—	7	—	2,6,8	1	4,5	3	3	V _o (7)	—	—	—	—	—	—	Vdc
	—	8	—	2,6,7	1	4,5	3	3	V _o (8)	—	—	—	—	—	—	Vdc
Switching Times	Pulse In	Pulse Out	—	—	—	—	—	—	—	Typ	Max	Typ	Max	Typ	Max	ns
	6	5	—	2,7,8	1	—	3	t _{pd} (5)	10.0	20.0	10.0	20.0	15.0	30.0	ns	
6	4	—	2,7,8	1	—	3	t _{pd} (4)	12.0	25.0	12.0	25.0	17.0	34.0			
Propagation Delay Time	6	5	—	2,7,8	1	—	3	t _{pd} (5)	12.0	25.0	12.0	25.0	13.0	30.0		
	6	4	—	2,7,8	1	—	3	t _{pd} (4)	10.0	20.0	10.0	20.0	11.0	25.0		
Rise Time	6	5	—	2,7,8	1	—	3	t _r (5)	13.0	25.0	13.0	25.0	16.0	31.0		
	6	4	—	2,7,8	1	—	3	t _r (4)	10.0	20.0	10.0	20.0	14.5	26.0		
Fall Time	6	5	—	2,7,8	1	—	3	t _f (5)	15.0	35.0	15.0	35.0	20.0	40.0		
	6	4	—	2,7,8	1	—	3	t _f (4)	15.0	35.0	15.0	35.0	20.0	40.0		


Pins not listed are left open. (1) Output is loaded with a 93-ohm resistor.

LAMP DRIVER

MECL MC300 series

MC316

Lamp driver that provides "OR" or "NOR" logic depending on the bias arrangement used and is capable of driving 6V lamps.

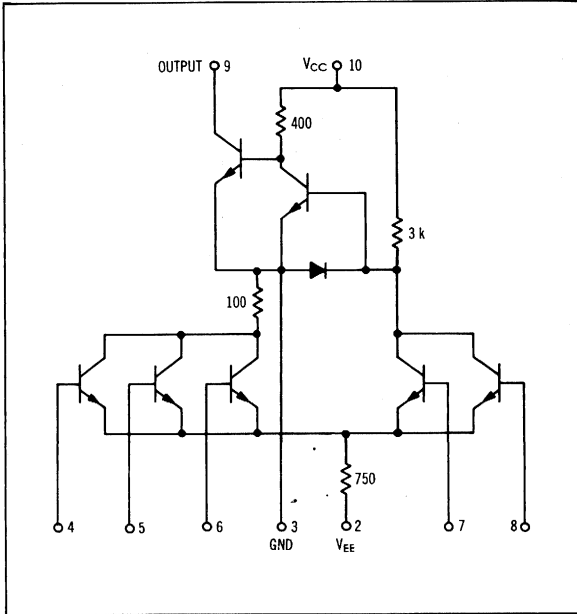

ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions							Ground Pin No	Symbol Pin No in ()	Test Limits						Unit
	Vdc ± 1%									-55°C		+25°C		+125°C		
	V _H Pin No	V _{I max} Pin No	V _L Pin No	V _{EE} Pin No	V _{BB} Pin No	V _{CC} Pin No	I _L ⊕ Pin No			Min	Max	Min	Max	Min	Max	
Power Supply Drain Current	—	4,5,6	—	2,7	8	10	—	3	I _c (10)	—	21.0	—	21.0	—	20.5	
	—	4,5,6	—	2,7	8	10	—	3	I _e (2)	—	8.0	—	8.0	—	7.7	mAdc
Input Current	4	—	—	2,5,6,7	8	10	—	3	I _{is} (4)	—	—	—	200	—	—	μAdc
	5	—	—	2,4,6,7	8	10	—	3	I _{is} (5)	—	—	—	—	—	—	↓
	6	—	—	2,4,5,7	8	10	—	3	I _{is} (6)	—	—	—	—	—	—	↓
	7	—	—	2,4,5,6	8	10	—	3	I _{is} (7)	—	—	—	—	—	—	↓
	8	—	—	2,4,5,7	6	10	—	3	I _{is} (8)	—	—	—	—	—	—	↓
Output Voltage, Low	—	—	6	2,4,5,7	8	10	9	3	V _{OL} (9)	—	0.9	—	1.0	—	0.8	
	—	—	6	2,4,5,8	7	10	9	3	V _{OL} (9)	—	0.9	—	1.0	—	0.8	
Output Voltage, High	—	4	—	2,5,6,7	8	10,9 ⊕	—	3	V _{OH} (4)	—	—	—	5.8	—	5.8	Vdc
	—	5	—	2,4,6,7	8	10,9 ⊕	—	3	V _{OH} (5)	—	—	—	—	—	—	↓
	—	6	—	2,4,5,7	8	10,9 ⊕	—	3	V _{OH} (6)	—	—	—	—	—	—	↓
	—	6	—	2,4,5,8	7	10,9 ⊕	—	3	V _{OH} (6)	—	—	—	—	—	—	↓


Pins not listed are left open. ⊕ Pin 9 is connected to V_{CC} through a 10 k-ohm resistor.
 ⊕ I_L specified for ambient temperature conditions. I_L = 100 mAdc at T_c = +125°C is acceptable, requiring a heat sink.

MECL-TO-SATURATED LOGIC
TRANSLATOR


MECL MC300 series

MC317

Level translator intended for converting non-saturated MECL signal levels to saturated logic levels; provides "OR" or "NOR" logic depending on the bias arrangement used.

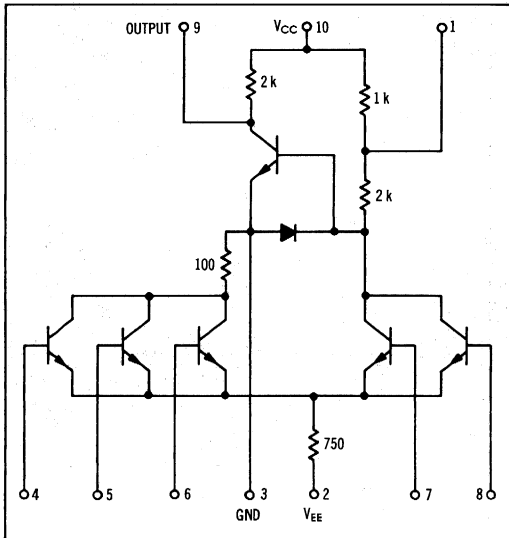

SWITCHING TEST CIRCUIT AND WAVEFORMS

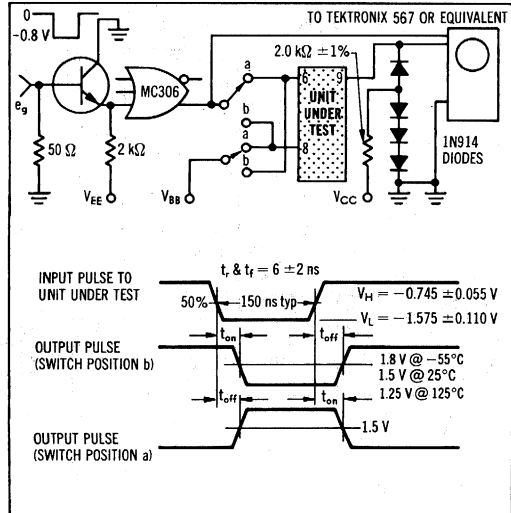

ELECTRICAL CHARACTERISTICS


Characteristic	Test Conditions							Ground Pin No	Symbol Pin No in ()	Test Limits						Unit
	Vdc ± 1%									-55°C		+25°C		+125°C		
	V _H Pin No	V _I max Pin No	V _L Pin No	V _{EE} Pin No	V _{BB} Pin No	V _{CC} Pin No	I _L Pin No			Min	Max	Min	Max	Min	Max	
Power Supply Drain Current	—	-0.945	-1.450	-5.20	-1.25	+6.0	10	—	7.0	—	7.0	—	6.8	mAdc		
	—	-0.690	-0.795	-1.350	-5.20	-1.15	+6.0	10	—	7.0	—	7.0	—	6.8	mAdc	
Input Current	4	—	—	2,5,6,7	8	10	—	3	I _{in} (4)	—	—	200	—	—	μAdc	
	5	—	—	2,4,6,7	8	10	—	3	I _{in} (5)	—	—	—	—	—	μAdc	
	6	—	—	2,4,5,7	8	10	—	3	I _{in} (6)	—	—	—	—	—	μAdc	
	7	—	—	2,4,5,8	6	10	—	3	I _{in} (7)	—	—	—	—	—	μAdc	
Output Voltage, High	—	—	—	2,4,5,6,7	8	10	—	3	V _{OH} (9)	—	—	5.8	—	—	Vdc	
	—	—	—	2,4,5,6,8	7	10	—	3	V _{OH} (9)	—	—	5.8	—	—	Vdc	
Output Voltage, Low	—	4	—	2,5,6,7	8	10	9	3	V _{OL} (9)	—	0.45	—	0.45	—	0.50	Vdc
	—	5	—	2,4,6,7	8	10	9	3	V _{OL} (9)	—	—	—	—	—	Vdc	
	—	6	—	2,4,5,7	8	10	9	3	V _{OL} (9)	—	—	—	—	—	Vdc	
	—	6	—	2,4,5,8	7	10	9	3	V _{OL} (9)	—	—	—	—	—	Vdc	
Switching Times	Pulse In	Pulse Out	—	2,4,5,7	8	10	—	3	t _{on}	Typ	Max	Typ	Max	Typ	Max	ns
	6	9	—	2,4,5,7	8	10	—	3	t _{on}	27.5	40.0	27.5	35.0	29.5	35.0	
Turn-On Time	8	9	—	2,4,5,7	6	10	—	3	t _{on}	27.5	40.0	27.5	35.0	29.5	35.0	ns
	6	9	—	2,4,5,7	8	10	—	3	t _{off}	25.0	40.0	26.0	35.0	27.0	40.0	
Turn-Off Time	8	9	—	2,4,5,7	6	10	—	3	t _{off}	25.0	40.0	26.0	35.0	27.0	40.0	ns
	6	9	—	2,4,5,7	8	10	—	3	t _{off}	25.0	40.0	26.0	35.0	27.0	40.0	

**SATURATED LOGIC-TO-MECL
DUAL TRANSLATOR**


MECL MC300 series

MC318

Level translator intended for converting saturated logic levels to non-saturated MECL signal levels.

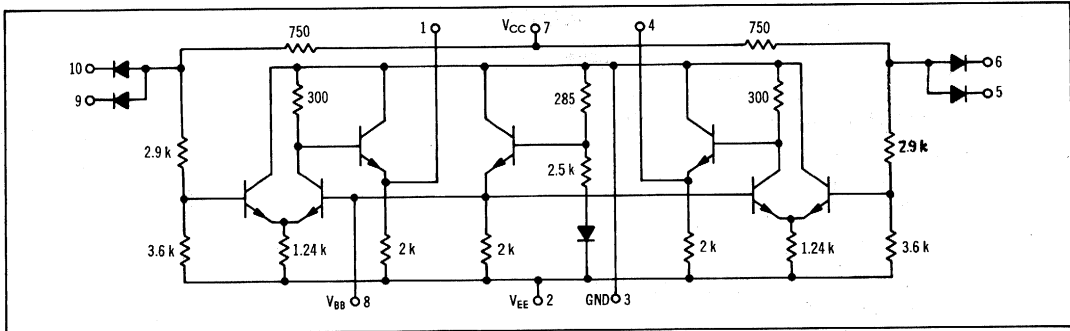

SWITCHING CHARACTERISTICS AND WAVEFORMS

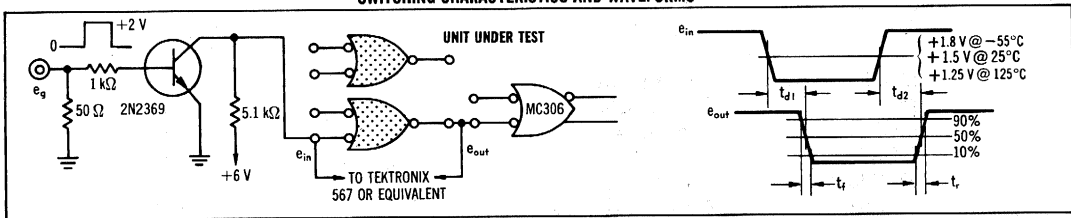

ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions				Ground Pin No	Symbol Pin No in ()	Test Limits						Unit
	V _{dc} ± 1%						Temperature						
	V Pin No	V Pin No	V _{EE} Pin No	V _{CC} Pin No			-55°C		+25°C		+125°C		
Power Supply Drain Current	—	—	2	7	3	I _c (7)	—	4.0	—	4.0	—	3.9	mAdc
	—	—	2	7	3	I _g (2)	—	24.0	—	24.0	—	23.3	mAdc
Input Load Current	—	—	2	7	3,5	I _i (5)	—	—	—	8.0	—	—	mAdc
	—	—	2	7	3,6	I _i (6)	—	—	—	—	—	—	↓
	—	—	2	7	3,9	I _i (9)	—	—	—	—	—	—	↓
	—	—	2	7	3,10	I _i (10)	—	—	—	—	—	—	↓
Input Reverse Current	—	—	2	5,7	3,6	I _r (5)	—	—	—	0.5	—	2.0	μAdc
	—	—	2	6,7	3,5	I _r (6)	—	—	—	—	—	—	↓
	—	—	2	7,9	3,10	I _r (9)	—	—	—	—	—	—	↓
	—	—	2	7,10	3,9	I _r (10)	—	—	—	—	—	—	↓
"OR" Logical "1" Output Voltage	—	5	2	7	3	V _s (4)	-0.825	-0.945	-0.690	-0.795	-0.525	-0.655	V _{dc}
	—	6	2	7	3	V _s (4)	↓	↓	↓	↓	↓	↓	↓
	—	9	2	7	3	V _s (1)	↓	↓	↓	↓	↓	↓	↓
	—	10	2	7	3	V _s (1)	↓	↓	↓	↓	↓	↓	↓
"OR" Logical "0" Output Voltage	5	—	2	7	3	V _s (4)	-1.560	-1.850	-1.465	-1.750	-1.340	-1.675	V _{dc}
	6	—	2	7	3	V _s (4)	↓	↓	↓	↓	↓	↓	↓
	9	—	2	7	3	V _s (1)	↓	↓	↓	↓	↓	↓	↓
	10	—	2	7	3	V _s (1)	↓	↓	↓	↓	↓	↓	↓
Bias Voltage Output Current	—	—	2	7	3	V _{as} (8)	-1.19	-1.32	-1.09	-1.22	-0.95	-1.08	V _{dc}
	—	—	2	7	3	V _{as} (8)	↓	↓	↓	↓	↓	↓	↓
Switching Times	Pulse In	Pulse Out					Typ	Max	Typ	Max	Typ	Max	
													ns
Propagation Delay Time	5	4	2	7	3	t _{d1} (4)	16.5	27.0	15.0	23.0	19.0	28.0	ns
	9	1	2	7	3	t _{d1} (1)	16.5	27.0	15.0	23.0	19.0	28.0	
	5	4	2	7	3	t _{d2} (4)	13.0	20.0	15.5	23.0	20.0	31.0	
	9	1	2	7	3	t _{d2} (1)	13.0	20.0	15.5	23.0	20.0	31.0	
Rise Time	5	4	2	7	3	t _r (4)	8.0	15.0	7.0	13.0	9.5	16.0	ns
	9	1	2	7	3	t _r (1)	8.0	15.0	7.0	13.0	9.5	16.0	
Fall Time	5	4	2	7	3	t _f (4)	8.0	14.0	7.5	13.0	10.0	17.0	ns
	9	1	2	7	3	t _f (1)	8.0	14.0	7.5	13.0	10.0	17.0	

Pins not listed are left open.

MECL

INTEGRATED CIRCUITS

INDEX

MC350 Series

		Page No.
Numerical Index		2-35
Logic Description		2-36
General Information		2-38
Circuit Description		2-38
Definitions		2-39
Packages		2-39
Worst-Case Transfer Characteristics		2-40
Maximum Ratings		2-40
Noise Margins		2-40
DEVICE SPECIFICATIONS		
GATES		
MC356	3-Input Gate	2-41
MC357	3-Input Gate	2-41
MC351	5-Input Gate	2-44
MC359	Dual 2-Input Gate	2-46
MC360	Dual 2-Input Gate	2-46
MC361	Dual 2-Input Gate	2-46
MC369G	Dual 2-Input High-Speed Gate	2-63
MC362A	Dual 3-Input Gate	2-48
MC369F	Dual 4-Input High-Speed Gate	2-65
MC363F	Quad 2-Input Gate	2-50
FLIP-FLOPS		
MC352A	R-S Flip-Flop	2-52
MC358A	AC-Coupled J-K Flip-Flop	2-54
MC364	AC-Coupled J-K Flip-Flop	2-56
HALF-ADDER		
MC353	Half-Adder	2-58
GATE EXPANDER		
MC355	Gate Expander	2-60
DRIVERS		
MC354	Bias Driver	2-61
MC365	Line Driver	2-62
MC369G	Dual 2-Input Clock Driver	2-63
MC369F	Dual 4-Input Clock Driver	2-65
MC366	Lamp Driver	2-67
TRANSLATORS		
MC367	MECL to Saturated Logic Translator	2-68
MC368	Saturated Logic to MECL Translator	2-69

NUMERICAL INDEX (Functions and Characteristics)

$V_{CC} = 0$, $V_{EE} = -5.2$ V, $T_A = 25^\circ\text{C}$

Function	Type ①	DC Output Loading Factor Each Output	Propagation Delay t_{pd} ns typ	Total Power Dissipation mW typ/pkg	Case	Page No.
5-Input OR/NOR Gate	MC351	25	7.5	37	71, 72	2-44
R-S Flip-Flop	MC352A	↓	11	42		2-52
Half-Adder	MC353		7.5	63		2-58
Bias Driver	MC354		—	18		2-61
5-Input Gate Expander	MC355		—	4.5	—	2-60
3-Input OR/NOR Gate	MC356	25	7.5	37	↓	2-41
3-Input OR/NOR Gate	MC357	↓	7.5	15		2-41
AC-Coupled J-K Flip-Flop	MC358A		8.5	87		2-54
Dual 2-Input NOR Gate	MC359		7.0	54		↓
Dual 2-Input NOR Gate	MC360		7.0	54	2-46	
Dual 2-Input NOR Gate	MC361	7.0	41	2-46		
Dual 3-Input NOR Gate (With Internal Bias)	MC362A	7.5	70	2-48		
Quad 2-Input NOR Gate	MC363F	↓	7.0	125	83 ↓ 71, 72 ↓	2-50
AC-Coupled J-K Flip-Flop	MC364		12	118		2-56
Line Driver	MC365		14	270 ②		2-62
Lamp Driver	MC366		—	135		2-67
Level Translator — MECL to Saturated Logic	MC367	7 (DTL)	27.5	63	↓	2-68
Level Translator — Saturated Logic to MECL	MC368	25 (MECL)	17	105	71, 72	2-69
Dual 4-Input Clock Driver/High-Speed Gate	MC369F	100	3.0	250	83	2-65
Dual 2-Input Clock Driver/High-Speed Gate	MC369G	100	3.0	250	71	2-63

① G suffix denotes Metal Can, F suffix denotes Flat Package. (i.e., MC351G = Metal Can, MC351F = Flat Package.)

② With 50-ohm load (each side)

LOGIC DESCRIPTION

MECL MC350 series

POSITIVE LOGIC: V_{hi} is a logical "1", V_{li} is a logical "0"

NEGATIVE LOGIC: V_{hi} is a logical "0", V_{li} is a logical "1"

The logic diagrams shown describe the circuits of the MC350 line and permit quick selection of those circuits required for the implementation of this particular logic system. Pertinent information such as logic equations, typical time delay, typical power dissipation, and truth tables is provided to show line compatibility. Package pin numbers and fan-in and fan-out for each device are specified on each logic diagram. The numbers at the

ends of the terminals are package pin numbers. The numbers in parentheses indicate ac loading factors at each terminal.

MECL circuits require a bias voltage which, for best results, should be obtained from a regulated, temperature-compensated, bias supply. A bias driver, type MC354, is included in the MECL line to provide this function when the bias driver is not contained in the logic element. Specifications for the bias driver are given on page 2-61

MC352A — R-S FLIP-FLOP

R	S	Q ⁺
0	1	1
1	0	0
0	0	Q [*]
1	1	N.D.

$t_{dr} = 10.5 \text{ ns}$
 $P_D = 42 \text{ mW}$

DC Set-Reset flip-flop with expandable input and buffered outputs. This flip-flop is available without buffered outputs as MC352.

MC351 — 5-INPUT GATE

$5 = 6 + 7 + 8 + 9 + 10$
 $4 = 6 + 7 + 8 + 9 + 10$

$t_{dr} = 7.5 \text{ ns}$
 $P_D = 37 \text{ mW}$

Provides the positive logic "NOR" function and its complement simultaneously.

MC356 — 3-INPUT GATE

$5 = 6 + 7 + 8$
 $4 = 6 + 7 + 8$

$t_{dr} = 7.0 \text{ ns}$
 $P_D = 37 \text{ mW}$

Provides the positive logic "NOR" function and its complement simultaneously.

MC358A — AC-COUPLED J-K FLIP-FLOP

CLOCKED J-K OPERATION

J _s	K _s	C _o	Q ⁺
0	0	1	Q [*]
0	1	1	1
1	0	1	0
1	1	1	Q [*]

The J_s and K_s inputs refer to logic levels while the C_o input refers to dynamic logic swings. The J_s and K_s inputs would be changed to a logical "1" only while the C_o input is in a logic "1" state. (C_o maximum "1" level = $V_{cc} - 0.6$ volts)

R-S OPERATION

R	S	Q ⁺
0	1	1
1	0	0
0	0	Q [*]
1	1	N.D.

$t_{dr} = 7.5 \text{ ns}$
 $P_D = 87 \text{ mW}$

AC-Coupled J-K flip-flop with dc Set and Reset inputs and buffered outputs for counter and shift register applications up to 15 MHz.

MC364 — AC-COUPLED J-K FLIP-FLOP

CLOCKED J-K OPERATION

J	K	C	Q ⁺
0	0	1	Q [*]
0	1	1	1
1	0	1	0
1	1	1	Q [*]

The J and K inputs refer to logic levels while the C_o input refers to dynamic logic swings. The J and K inputs should be changed to a logical "1" only while the C_o input is in a logic "1" state. (C_o maximum "1" level = $V_{cc} - 0.6$ volts)

R-S OPERATION

R	S	Q ⁺
0	1	1
1	0	0
0	0	Q [*]
1	1	N.D.

$t_{dr} = 12 \text{ ns}$
 $P_D = 118 \text{ mW}$

High-speed ac-coupled J-K flip-flop with dc Set and Reset inputs for counter and shift register applications up to 30 MHz operation.

MC359 — DUAL 2-INPUT GATE

$6 = 7 + 8$
 $5 = 9 + 10$

$t_{dr} = 6.5 \text{ ns}$
 $P_D = 27 \text{ mW/gate}$

Provides the positive logic "NOR" function.

LOGIC DESCRIPTION (continued)

<p>MC360 — DUAL 2-INPUT GATE</p> <p>**Optional pull-down resistor. If resistor is desired, connect pin 4 to pin 5.</p> <p>$t_{dl} = 6.5 \text{ ns}$ $P_D = 27 \text{ mW/gate}$</p> <p>Provides the positive logic "NOR" function. Same as MC359 with one output pull-down resistor optional (see schematic diagram on page 2-46).</p>	<p>MC361 — DUAL 2-INPUT GATE</p> <p>**Optional pull-down resistor. If resistor is desired, connect pin 4 to pin 5 or pin 6.</p> <p>$t_{dl} = 6.5 \text{ ns}$ $P_D = 21 \text{ mW/gate}$</p> <p>Provides the positive logic "NOR" function. Same as MC359 with one output pull-down resistor omitted and the second optional (see schematic diagram on page 2-46).</p>	<p>MC362A — DUAL 3-INPUT GATE</p> <p>$t_{dl} = 7.5 \text{ ns}$ $P_D = 35 \text{ mW/gate}$</p> <p>Provides the positive logic "NOR" function, and features an internal bias driver. This gate without the bias driver is available as the MC362.</p>
<p>MC363F — QUAD 2-INPUT GATE</p> <p>$t_{dl} = 6.5 \text{ ns}$ $P_D = 31 \text{ mW/gate}$</p> <p>Provides the positive logic "NOR" function, and features an internal bias driver.</p>	<p>MC365 — LINE DRIVER</p> <p>$t_{dl} = 14 \text{ ns}$ $P_D = 270 \text{ mW (with } 50 \Omega \text{ load)}$</p> <p>Drives lines of 50 ohms or greater while providing the positive logic "NOR" function and its complement simultaneously.</p>	<p>MC369F — HIGH-SPEED CLOCK DRIVER OR DUAL 4-INPUT GATE</p> <p>$t_{dl} = 3 \text{ ns}$ $P_D = 125 \text{ mW/gate}$</p> <p>Provides the positive logic "NOR" function and its complement simultaneously.</p>
<p>MC369G — HIGH-SPEED CLOCK DRIVER OR DUAL 2-INPUT GATE</p> <p>$t_{dl} = 3 \text{ ns}$ $P_D = 125 \text{ mW/gate}$</p> <p>Provides the positive logic "NOR" function and its complement simultaneously.</p>	<p>MC353 — HALF-ADDER</p> <p>$t_{dl} = 7 \text{ ns}$ $P_D = 63 \text{ mW}$</p> <p>Provides the "SUM", "CARRY", and "NOR" functions simultaneously. If complement inputs are not used, an undefined state can occur.</p>	<p>MC366 — LAMP DRIVER</p> <p>$P_D = 135 \text{ mW}$</p> <p>Capable of driving 6-volt lamps. Positive "NOR" function is obtained by applying V_{DD} to pin 4, 5, or 6, with pins 7 and 8 used as inputs. Positive "OR" is obtained by applying V_{DD} to pin 7 or 8, with pins 4, 5, and 6 used as inputs.</p>
<p>MC367 — LEVEL TRANSLATOR</p> <p>$t_{dr} = 30 \text{ ns}$ $P_D = 63 \text{ mW}$</p> <p>Intended for converting non-saturated MECL signal levels to saturated logic levels. Positive "NOR" function is obtained by applying V_{DD} to pin 7 or 8, with pins 4, 5, and 6 used as inputs. Positive "OR" is obtained by applying V_{DD} to pin 4, 5, or 6, with pins 7 and 8 used as inputs.</p>	<p>MC368 — LEVEL TRANSLATOR</p> <p>$t_{dl} = 17 \text{ ns}$ $P_D = 105 \text{ mW}$</p> <p>Intended for converting saturated logic levels to non-saturated MECL signal levels. By applying DTL input logic levels as defined by logical "0" at 0.4 V and logical "1" at 5.0 V, corresponding MECL outputs are obtained as defined by logical "0" at -1.55 V and logical "1" at -0.75 V.</p>	<p>MC355 — 5-INPUT EXPANDER</p> <p>$t_{dl} = 5 \text{ ns}$</p> <p>For use with the MC352A, MC356, MC357, and MC365. Each expander unit increases the fan-in of the basic gate by five. For highest performance, a maximum of three expander units per gate is recommended.</p>

CIRCUIT DESCRIPTION

The MECL line of monolithic integrated logic circuits was designed as a non-saturating form of logic which eliminates transistor storage time as a speed limiting characteristic, and permits extremely high-speed operation.

The typical MECL circuit comprises a differential-amplifier input, with emitter-follower output to restore dc levels. High fan-out operation is possible because of the high input impedance of the differential amplifier and the low output impedance of the emitter followers. Power-supply noise is virtually eliminated by the nearly constant current drain of the differential amplifier, even during the transition period. Basic gate design provides for simultaneous output of both the function and its complement.

POWER-SUPPLY CONNECTIONS

Any one of the power supply nodes, V_{BB} , V_{CC} , or V_{EE} may be used as ground; however, the manufacturer has found it most convenient to ground the V_{CC} node. In such a case: $V_{CC} = 0$, $V_{BB} = -1.15$ V, $V_{EE} = -5.2$ V, as shown in the schematic diagram above.

SYSTEM LOGIC SPECIFICATIONS

The output logic swing of 0.8 V then varies from a low state of $V_L = -1.55$ V to a high state of $V_H = -0.75$ V with respect to ground.

Positive logic is used when reference is made to logical "0's" or "1's". Then

$$\left. \begin{aligned} \text{"0"} &= -1.55 \text{ V} \\ \text{"1"} &= -0.75 \text{ V} \end{aligned} \right\} \text{ typical}$$

Dynamic logic refers to a change of logic states. Dynamic "0" is a negative going voltage excursion and a dynamic "1" is a positive going voltage excursion.


CIRCUIT OPERATION

A fixed bias of -1.15 volts is applied to the "bias input" of the differential amplifier and the logic signals are applied to the "signal input". If a logical "0" is applied, the current through R_E is supplied by the fixed-biased transistor. A drop of 800 mV occurs across R_{C2} . The OR output then is -1.55 V, or one V_{BE} -drop below 800 mV. Since no current flows in the "signal input" transistor, the NOR output is a V_{BE} -drop below ground, or -0.75 volts. When a logical "1" level is applied to the "signal input", the current through R_{C2} is switched to the "signal input" transistor and a drop of 800 mV occurs across R_{C1} . The OR output then goes to -0.75 volts and the NOR output goes to -1.55 volts.

Note: Any unused input should be connected to V_{EE} .

BIAS VOLTAGE SOURCE

The bias voltage applied to the bias input is obtained from a regulated, temperature-compensated bias driver, type MC354. The temperature characteristics of the bias driver compensate for any variations in circuit operating point over the temperature range or supply voltage changes, to insure that the threshold point is always in the center of the transition region. The bias driver can be used to drive up to 25 logic elements and should be employed for all elements except those with built-in bias networks.

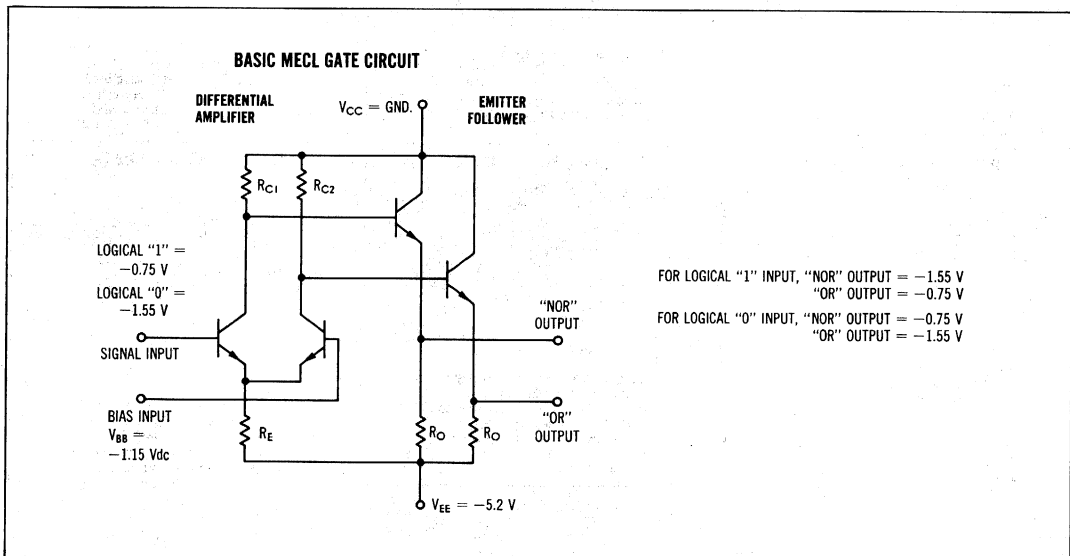

GENERAL INFORMATION (continued)


DEFINITIONS

- e_{in} AC signal applied to the input
- e_{out} AC signal at the output
- I_C Amount of current drawn from the positive power supply by the test unit
- I_{CEX} Total collector leakage current exhibited by the gate expander when all inputs are at the negative supply potential
- I_E Amount of current drawn from the test unit by the negative power supply
- I_{in} Current drawn by the input of the test unit when a logical "1" (V_H) is applied to the input
- I_L Current drawn from a node when that node is at ground potential
- t_{d1} Time required for the output pulse to reach the 50% point of its leading edge when referenced to the 50% point of the input pulse leading edge
- t_{d2} Time required for the output pulse to reach the 50% point of its trailing edge when referenced to the 50% point of the input pulse trailing edge
- t_{df} Time required for a flip-flop output to reach the 50% point of its negative going edge when referenced to the 50% point of the input pulse leading edge
- t_{dr} Time required for a flip-flop output to reach the 50% point of its positive going edge when referenced to the 50% point of the input pulse leading edge
- t_f Time required for the output pulse to go more negative from its 90% point to its 10% point
- t_r Time required for the output pulse to go more positive from its 10% point to its 90% point
- V_1 "NOR" output voltage — logical "1" level output voltage when a logical "0" level (V_L) is applied to the input
- V_2 "OR" output voltage — logical "0" level output voltage when a logical "0" level (V_L) is applied to the input
- V_3 Saturation breakpoint voltage which corresponds to the "NOR" output characteristic where the rate of change in the output voltage to the rate of change in input voltage is zero
- V_4 "NOR" output voltage — logical "0" level output voltage when a logical "1" level ($V_1 \text{ max}$) level is applied to the input
- V_5 "OR" output voltage — logical "1" level output voltage when a logical "1" ($V_1 \text{ max}$) level is applied to the input
- V_6 Output latch voltage — input voltage to a flip-flop which causes the output voltage to change from a logical "1" level to a logical "0" level and corresponds to the point where the rate of change in the output voltage to the rate of the input voltage approaches infinity
- V_H Logical "1" input voltage
- V_L Logical "0" input voltage
- V_{OH} High-level output voltage when the saturated logic circuit output is in an "off" condition
- V_{OL} Low-level output voltage when the saturated logic output circuit is in an "on" condition
- ΔV_1 Change in the "1" level output voltage as the load is varied from no load to full load
- ΔV_5 Change in the "1" level output voltage as the load is varied from no load to full load

PACKAGES

All MECL integrated circuits are available in both the TO-91, 10-lead flat package and the 10-lead metal package. To order the flat package, add suffix "F" to basic type number; to order metal package, add suffix "G".

Exceptions: Types MC363F and MC369F are available only in the TO-86, 14-lead flat package; type MC369G is available only in the metal package.




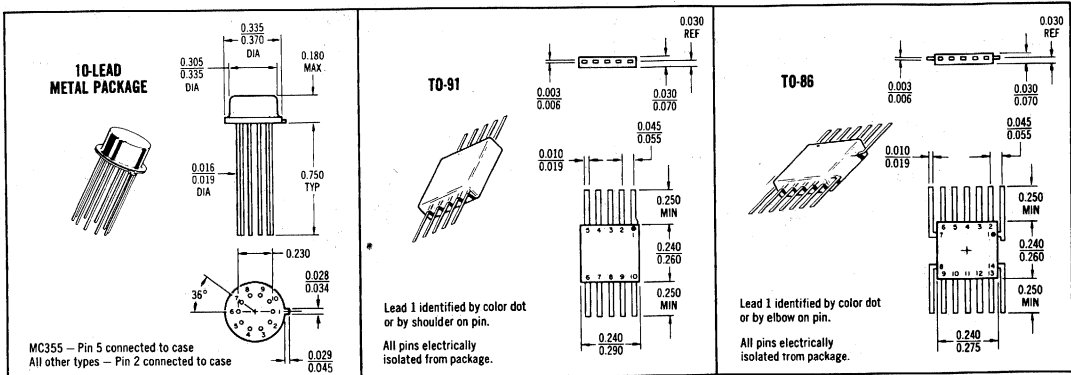


GENERAL INFORMATION (continued)

WORST-CASE TRANSFER CHARACTERISTICS

The following graphs show minimum and maximum limits of major parameters associated with the transfer characteristics of the MECL line. Min-Max limits, given at three different temperatures can be interpreted for design purposes as 10% to 90% spreads at all points on the curve except for guaranteed points in the Electrical Characteristics tables.

DEFINITIONS

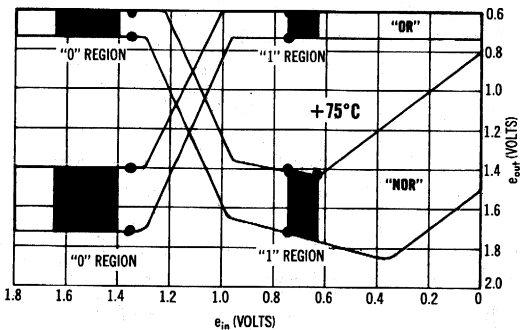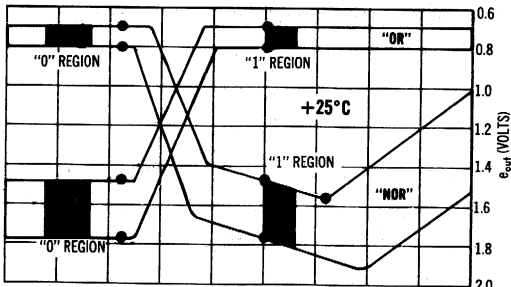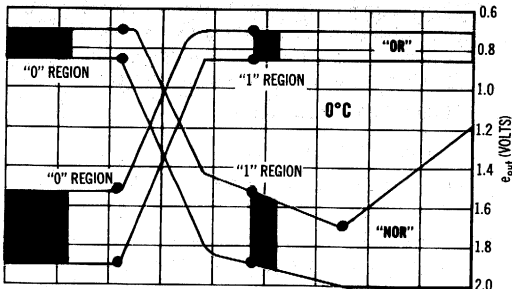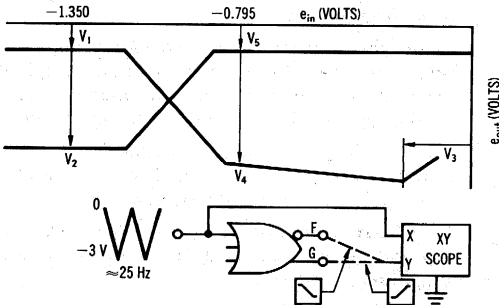

MAXIMUM RATINGS

Characteristic	Symbol	Rating	Unit
----------------	--------	--------	------

Ratings above which device life may be impaired:

Power Supply Voltage ($V_{CC} = 0$)	V_{EE}	-10	Vdc
Base Input Voltage ($V_{CC} = 0$)	V_{in}	0 Vdc to V_{EE}	Vdc
Output Source Current	I_O	20	mAdc
Storage Temperature Range	T_{stg}	-65 to +150	°C

Recommended maximum ratings above which performance may be degraded:



Operating Temperature Range	T_A	0 to +75	°C
AC Fan-In (Expandable Gates)	m	18	—
AC Fan-Out* (Gates and Flip-Flops)	n	15	—

*Although a minimum dc fan-out of 25 is guaranteed in each electrical specification, it is recommended that the maximum ac fan-out of 15 be used for high-speed operation.

NOISE MARGINS (90 PERCENTILE)

The following graphs show worst-case Noise Margins as a function of temperature and fan-out. Top graph illustrates the advantage gained through use of MC354 bias driver, as compared with non-compensated fixed bias source, bottom.

Note: Any unused input should be connected to V_{EE} .

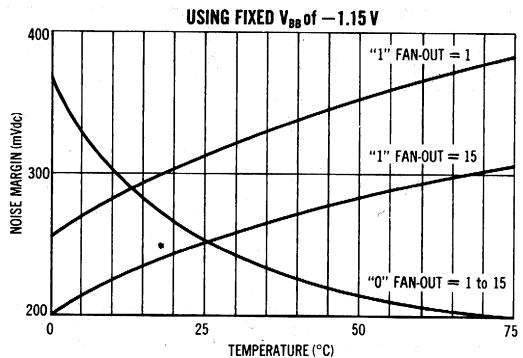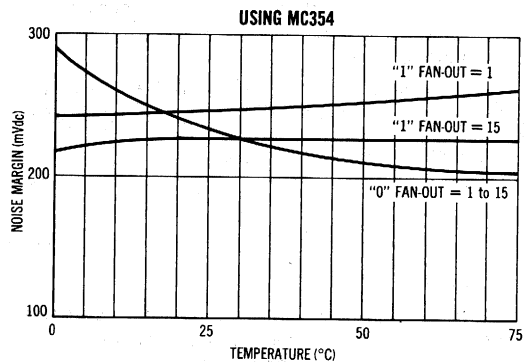


3-INPUT GATES


MECL MC350 series

MC356 • MC357


Expandable 3-input gates that provide the positive logic "NOR" function and its complement simultaneously. MC357 omits output pull-down resistors, permitting reduction of power dissipation.

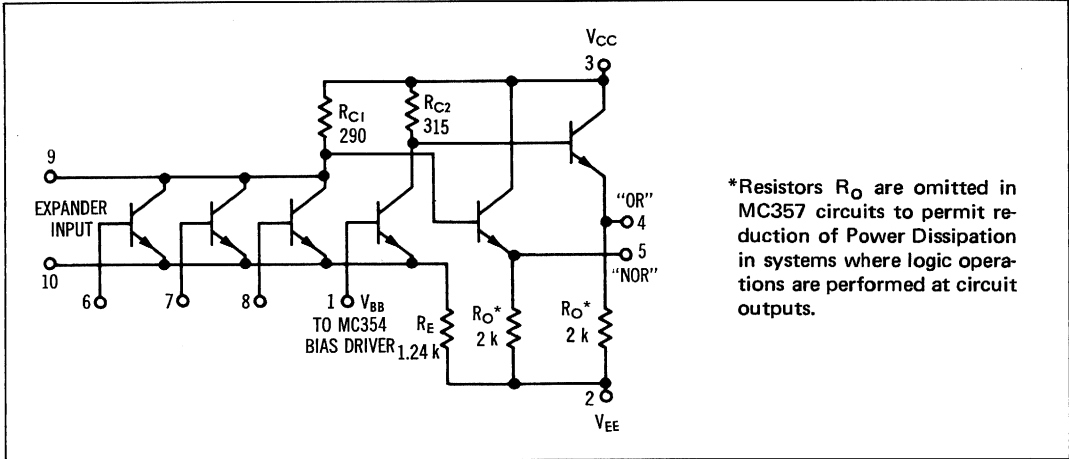


SWITCHING TIME TEST CIRCUIT

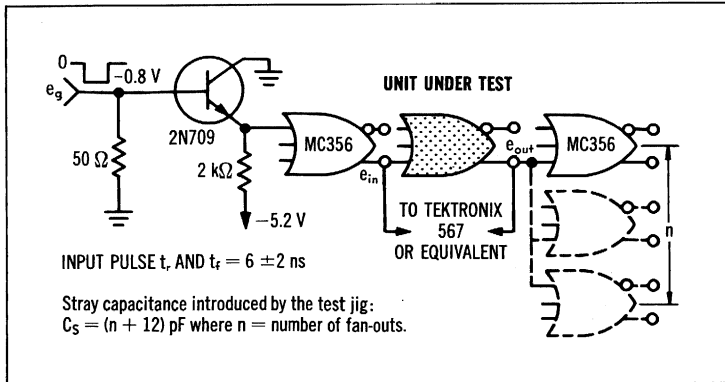


PROPAGATION DELAY




RISE AND FALL TIME



Fan-in obtained with MC355 input expanders; all but driven input connected to -5.2 V.

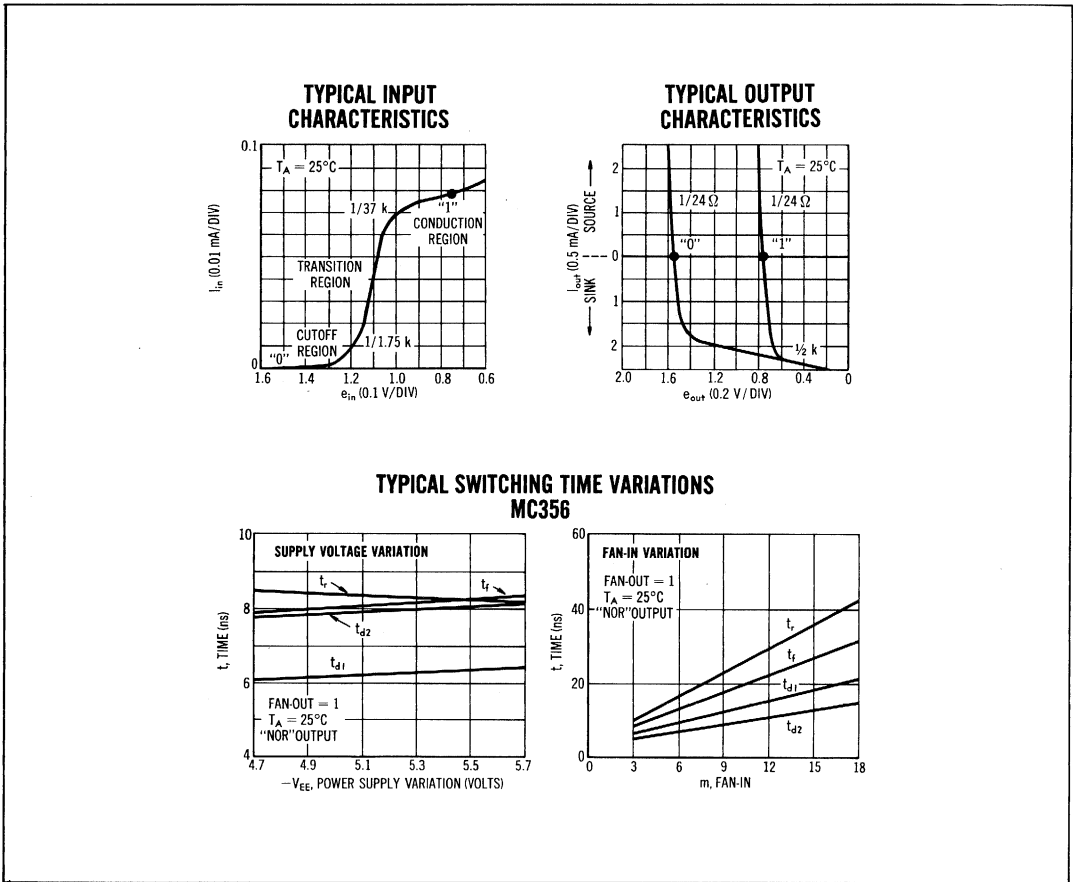

SWITCHING CHARACTERISTICS (10% to 90% distribution)

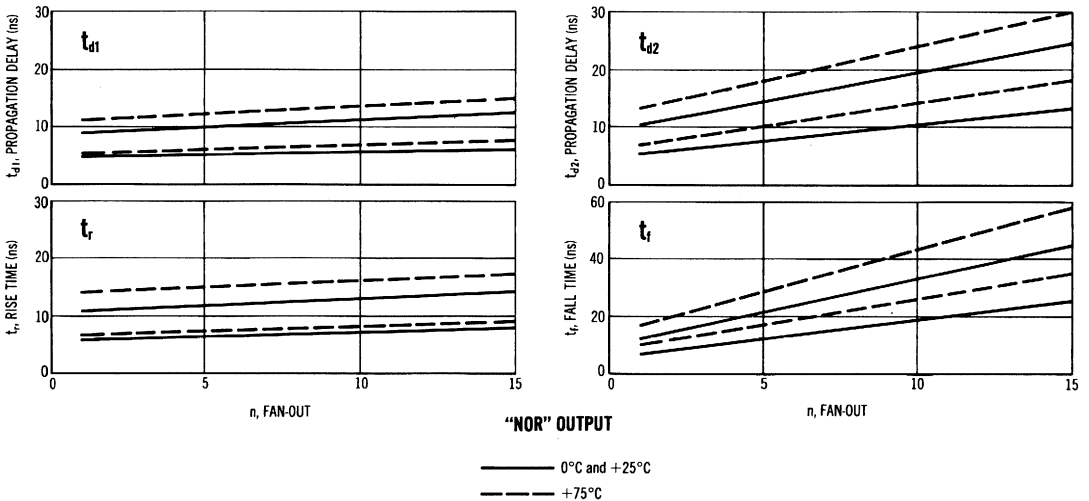

MC356, MC357 (continued)

ELECTRICAL CHARACTERISTICS



Characteristic	Pin No	Test Conditions Vdc ± 1%						dV _{in} Pin No	I _L Pin No	Ground Pin No	Symbol Pin No in ()	Test Limits						Unit
		0°C		+25°C		+75°C						0°C		+25°C		+75°C		
		Min	Max	Min	Max	Min	Max					Min	Max	Min	Max	Min	Max	
Power Supply	MC356	—	—	—	2.6, 7.8	1	—	—	3	I _E (2)	—	9.25	—	8.85	—	8.15	mAdc	
Drain Current	MC357	—	—	—	2.6, 7.8	1	—	—	3	I _E (2)	—	3.8	—	—	—	3.3	mAdc	
Input Current		6	—	—	2.7, 8	1	—	—	3	I _{in} (6)	—	—	—	100	—	—	μAdc	
		7	—	—	2.6, 8	1	—	—	3	I _{in} (7)	—	—	—	↓	—	—	↓	
		8	—	—	2.6, 7	1	—	—	3	I _{in} (8)	—	—	—	↓	—	—	↓	
"NOR" Logical "1" Output Voltage		—	—	6	2.7, 8	1	—	—	3	V _I (5)	-0.715	-0.850	-0.670	-0.795	-0.590	-0.725	Vdc	
		—	—	7	2.6, 8	1	—	—	3	V _I (5)	↓	↓	↓	↓	↓	↓	↓	
		—	—	8	2.6, 7	1	—	—	3	V _I (5)	↓	↓	↓	↓	↓	↓	↓	
"NOR" Logical "0" Output Voltage		—	6	—	2.7, 8	1	—	—	3	V _A (5)	-1.510	-1.880	-1.465	-1.750	-1.395	-1.730	Vdc	
		—	7	—	2.6, 8	1	—	—	3	V _A (5)	↓	↓	↓	↓	↓	↓	↓	
		—	8	—	2.6, 7	1	—	—	3	V _A (5)	↓	↓	↓	↓	↓	↓	↓	
"OR" Logical "1" Output Voltage		—	6	—	2.7, 8	1	—	—	3	V _S (4)	-0.715	-0.850	-0.670	-0.795	-0.590	-0.725	Vdc	
		—	7	—	2.6, 8	1	—	—	3	V _S (4)	↓	↓	↓	↓	↓	↓	↓	
		—	8	—	2.6, 7	1	—	—	3	V _S (4)	↓	↓	↓	↓	↓	↓	↓	
"OR" Logical "0" Output Voltage		—	6	—	2.7, 8	1	—	—	3	V ₂ (4)	-1.510	-1.880	-1.465	-1.750	-1.395	-1.730	Vdc	
		—	7	—	2.6, 8	1	—	—	3	V ₂ (4)	↓	↓	↓	↓	↓	↓	↓	
		—	8	—	2.6, 7	1	—	—	3	V ₂ (4)	↓	↓	↓	↓	↓	↓	↓	
"NOR" Output Voltage Change (No load to full load)		—	—	6	2.7, 8	1	—	5Ⓞ	3	ΔV _I (5)	—	-0.055	—	-0.055	—	-0.065	Volts	
"OR" Output Voltage Change (No load to full load)		—	6	—	2.7, 8	1	—	4Ⓞ	3	ΔV _S (4)	—	-0.055	—	-0.055	—	-0.065	Volts	
"NOR" Saturation Breakpoint Voltage		—	—	—	2.7, 8	1	6Ⓞ	—	3	V ₃ (5)	—	-0.51	—	-0.55	—	-0.63	Vdc	
		—	—	—	2.6, 8	1	7Ⓞ	—	3	V ₃ (5)	—	↓	—	↓	—	↓	↓	
		—	—	—	2.6, 7	1	8Ⓞ	—	3	V ₃ (5)	—	↓	—	↓	—	↓	↓	
Switching Times		Pulse In	Pulse Out								Typ	Max	Typ	Max	Typ	Max	ns	
Propagation Delay Time	6	4	—	2.7, 8	1	—	—	3	t _{er} (4)	8.5	11.5	8.5	11.5	10.0	15.0	↓		
	6	5	—	2.7, 8	1	—	—	3	t _{er} (5)	6.5	10.5	6.5	10.5	7.5	11.5			
	6	4	—	2.7, 8	1	—	—	3	t _{er} (4)	6.0	11.0	6.0	11.0	7.5	12.0			
	6	5	—	2.7, 8	1	—	—	3	t _{er} (5)	8.5	11.5	8.5	11.5	10.0	15.0			
Rise Time	6	4	—	2.7, 8	1	—	—	3	t _r (4)	7.0	11.5	7.0	11.5	9.0	13.0			
	6	5	—	2.7, 8	1	—	—	3	t _r (5)	9.0	12.5	9.5	12.5	11.5	15.5			
Fall Time	6	4	—	2.7, 8	1	—	—	3	t _f (4)	9.0	14.0	9.5	14.0	12.0	17.0			
	6	5	—	2.7, 8	1	—	—	3	t _f (5)	8.5	14.0	9.0	14.0	11.5	17.0			

Pins not listed are left open

Ⓞ Input voltage is adjusted to obtain dV "NOR" / dV_{in} = 0.

Ⓞ Current test conditions: no load = 0; full load = -2.5mAdc ± 5%.

SWITCHING CHARACTERISTICS (10% to 90% distribution)

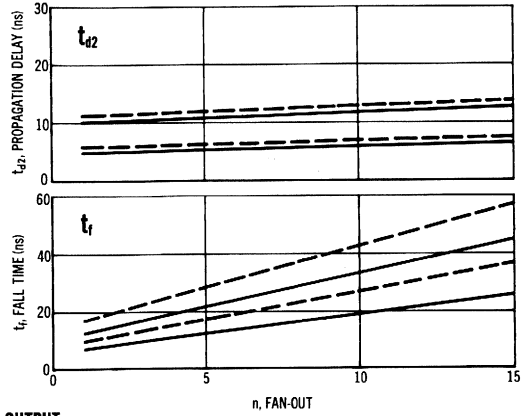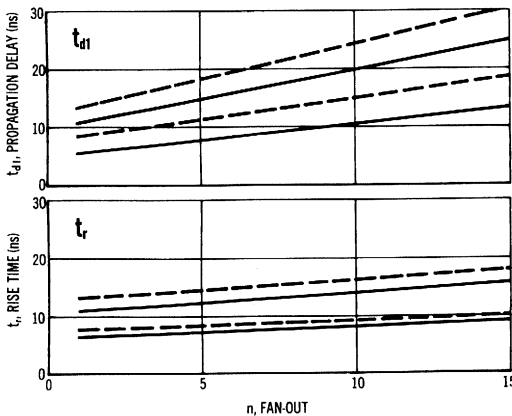

"OR" OUTPUT


— 0°C and +25°C
- - - +75°C

5-INPUT GATE


MECL MC350 series

MC351


A 5-input gate that provides the positive logic "OR" function and its complement simultaneously.

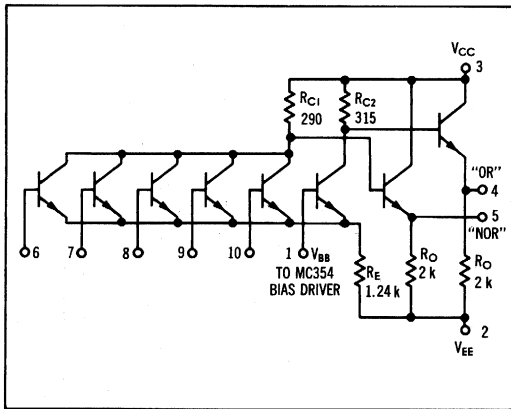


SWITCHING TIME TEST CIRCUIT

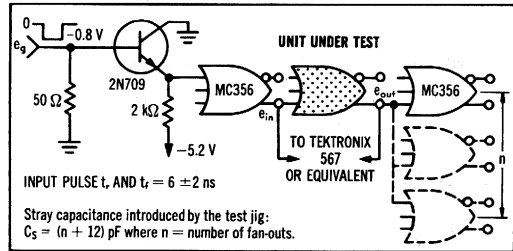


PROPAGATION DELAY




RISE AND FALL TIME







TYPICAL INPUT CHARACTERISTICS



TYPICAL OUTPUT CHARACTERISTICS



SWITCHING CHARACTERISTICS (10% to 90% distribution)

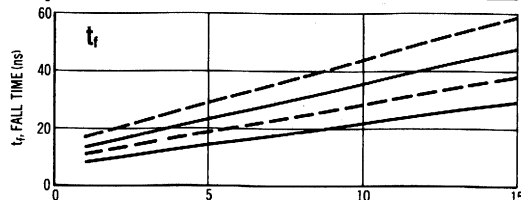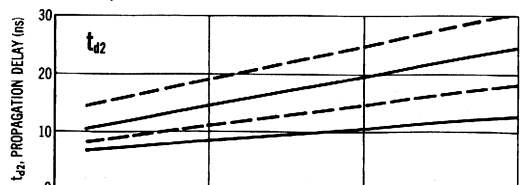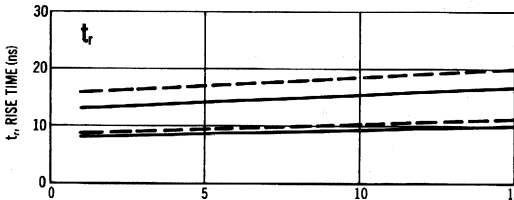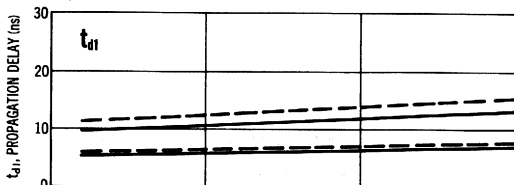

"NOR" OUTPUT

— 0°C and +25°C
 - - - +75°C

MC351 (continued)



ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions Vdc ± 1%					V _H Pin No	V _{I max} Pin No	V _L Pin No	V _{EE} Pin No	V _{BB} Pin No	dV _{in} Pin No	L _I Pin No	Ground Pin No	Symbol Pin No in ()	Test Limits						Unit	
	0°C		+25°C		+75°C																	
	Min	Max	Min	Max	Min										Max							
Power Supply Drain Current	—	—	—	2, 6, 7, 8, 9, 10	1	—	—	—	—	—	—	—	3	I _E (2)	—	9.25	—	8.85	—	8.15	mAdc	
Input Current	6	—	—	2, 7, 8, 9, 10	1	—	—	—	—	—	—	—	3	I _{in} (6)	—	—	—	100	—	—	μAdc	
	7	—	—	2, 6, 8, 9, 10	1	—	—	—	—	—	—	—	3	I _{in} (7)	—	—	—	—	—	—	μAdc	
	8	—	—	2, 6, 7, 9, 10	1	—	—	—	—	—	—	—	3	I _{in} (8)	—	—	—	—	—	—	μAdc	
	9	—	—	2, 6, 7, 8, 10	1	—	—	—	—	—	—	—	3	I _{in} (9)	—	—	—	—	—	—	μAdc	
"NOR" Logical "1" Output Voltage	—	—	—	2, 6, 7, 8, 9	1	—	—	—	—	—	—	—	3	V _I (5)	—0.715	—0.850	—0.670	—0.795	—0.590	—0.725	Vdc	
	—	—	6	2, 7, 8, 9, 10	1	—	—	—	—	—	—	—	3	V _I (5)	—	—	—	—	—	—	Vdc	
	—	—	7	2, 6, 8, 9, 10	1	—	—	—	—	—	—	—	3	V _I (5)	—	—	—	—	—	—	Vdc	
	—	—	8	2, 6, 7, 9, 10	1	—	—	—	—	—	—	—	3	V _I (5)	—	—	—	—	—	—	Vdc	
"NOR" Logical "0" Output Voltage	—	—	—	2, 6, 7, 8, 9	1	—	—	—	—	—	—	—	3	V _I (5)	—	—	—	—	—	—	Vdc	
	—	6	—	2, 7, 8, 9, 10	1	—	—	—	—	—	—	—	3	V _A (5)	—1.510	—1.880	—1.465	—1.750	—1.395	—1.730	Vdc	
	—	7	—	2, 6, 8, 9, 10	1	—	—	—	—	—	—	—	3	V _A (5)	—	—	—	—	—	—	Vdc	
	—	8	—	2, 6, 7, 9, 10	1	—	—	—	—	—	—	—	3	V _A (5)	—	—	—	—	—	—	Vdc	
"OR" Logical "1" Output Voltage	—	—	—	2, 6, 7, 8, 9	1	—	—	—	—	—	—	—	3	V _I (4)	—0.715	—0.850	—0.670	—0.795	—0.590	—0.725	Vdc	
	—	6	—	2, 7, 8, 9, 10	1	—	—	—	—	—	—	—	3	V _I (4)	—	—	—	—	—	—	Vdc	
	—	7	—	2, 6, 8, 9, 10	1	—	—	—	—	—	—	—	3	V _I (4)	—	—	—	—	—	—	Vdc	
	—	8	—	2, 6, 7, 9, 10	1	—	—	—	—	—	—	—	3	V _I (4)	—	—	—	—	—	—	Vdc	
"OR" Logical "0" Output Voltage	—	—	—	2, 6, 7, 8, 9	1	—	—	—	—	—	—	—	3	V _I (4)	—	—	—	—	—	—	Vdc	
	—	6	—	2, 7, 8, 9, 10	1	—	—	—	—	—	—	—	3	V _I (4)	—	—	—	—	—	—	Vdc	
	—	7	—	2, 6, 8, 9, 10	1	—	—	—	—	—	—	—	3	V _I (4)	—	—	—	—	—	—	Vdc	
	—	8	—	2, 6, 7, 9, 10	1	—	—	—	—	—	—	—	3	V _I (4)	—	—	—	—	—	—	Vdc	
"NOR" Output Voltage Change (No load to full load)	—	—	6	2, 7, 8, 9, 10	1	—	—	5 ⊕	3	ΔV _I (5)	—	—0.055	—	—0.055	—	—0.065	Volts					
"OR" Output Voltage Change (No load to full load)	—	6	—	2, 7, 8, 9, 10	1	—	—	4 ⊕	3	ΔV _I (4)	—	—0.055	—	—0.055	—	—0.065	Volts					
"NOR" Saturation Breakpoint Voltage	—	—	—	2, 7, 8, 9, 10	1	6 ⊕	—	—	3	V _I (5)	—	—0.51	—	—0.55	—	—0.63	Vdc					
	—	—	—	2, 6, 8, 9, 10	1	7 ⊕	—	—	3	V _I (5)	—	—	—	—	—	—	Vdc					
	—	—	—	2, 6, 7, 9, 10	1	8 ⊕	—	—	3	V _I (5)	—	—	—	—	—	—	Vdc					
	—	—	—	2, 6, 7, 8, 10	1	9 ⊕	—	—	3	V _I (5)	—	—	—	—	—	—	Vdc					
Switching Times	Pulse In	Pulse Out	—	2, 6, 7, 8, 9	1	10 ⊕	—	—	3	V _I (5)	—	—	—	—	—	—	—	—	—	—	ns	
	6	4	—	2, 7, 8, 9, 10	1	—	—	—	3	t _{er} (4)	Typ	9.0	Max	12.5	Typ	9.0	Max	12.5	Typ	9.5	Max	16.0
Propagation Delay Time	6	5	—	2, 7, 8, 9, 10	1	—	—	—	3	t _{er} (5)	Typ	7.0	Max	11.0	Typ	7.0	Max	11.0	Typ	7.5	Max	13.0
	6	4	—	2, 7, 8, 9, 10	1	—	—	—	3	t _{er} (4)	Typ	6.5	Max	11.0	Typ	6.5	Max	11.0	Typ	7.5	Max	13.0
Rise Time	6	5	—	2, 7, 8, 9, 10	1	—	—	—	3	t _r (4)	Typ	8.5	Max	12.5	Typ	8.5	Max	12.5	Typ	10.0	Max	16.0
	6	4	—	2, 7, 8, 9, 10	1	—	—	—	3	t _r (5)	Typ	8.0	Max	12.0	Typ	8.0	Max	12.0	Typ	9.5	Max	15.5
Fall Time	6	5	—	2, 7, 8, 9, 10	1	—	—	—	3	t _f (4)	Typ	9.5	Max	14.5	Typ	10.0	Max	14.5	Typ	11.0	Max	17.0
	6	4	—	2, 7, 8, 9, 10	1	—	—	—	3	t _f (5)	Typ	9.5	Max	15.0	Typ	10.0	Max	15.0	Typ	11.0	Max	17.5
6	5	—	2, 7, 8, 9, 10	1	—	—	—	3	t _f (5)	Typ	9.0	Max	15.0	Typ	9.5	Max	15.0	Typ	10.5	Max	17.5	

Pins not listed are left open

⊕ Input voltage is adjusted to obtain dV_I / dV_{in} = "0".

⊕ Current test conditions: no load = 0; full load = -2.5mAdc ± 5%.

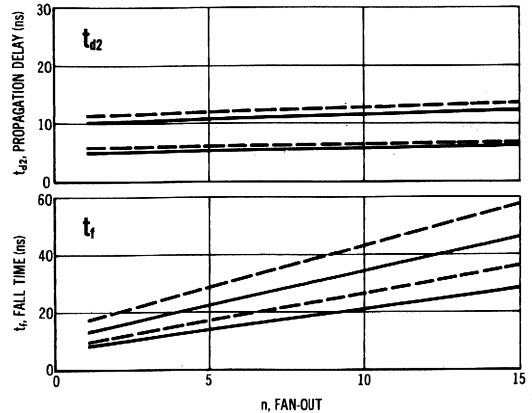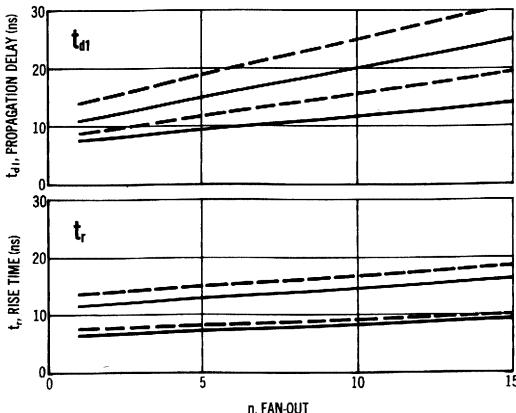

"OR" OUTPUT




— 0°C and +25°C
- - - +75°C

DUAL 2-INPUT GATES


MECL MC350 series

MC359 • MC360 • MC361


Dual 2-input gates that provide the positive logic "NOR" function. MC359 has two output pull-down resistors; MC360 has one of the output pull-down resistors optional; MC361 omits one output pull-down resistor and has the second optional.

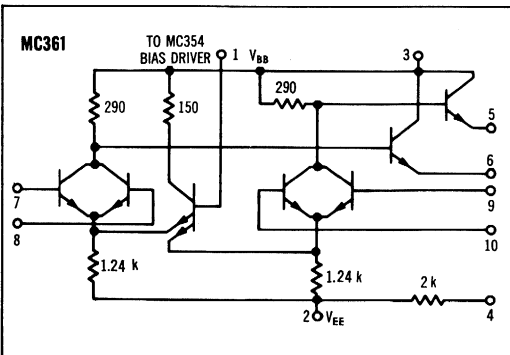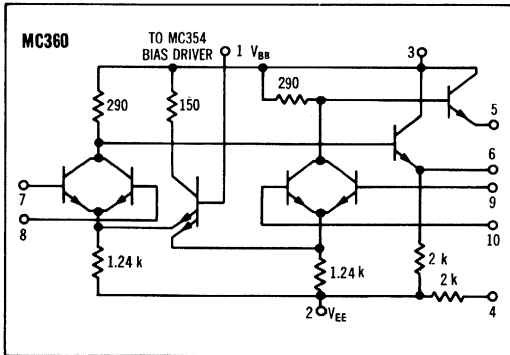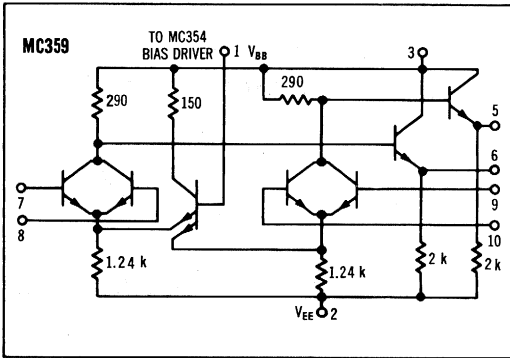


SWITCHING TIME TEST CIRCUIT

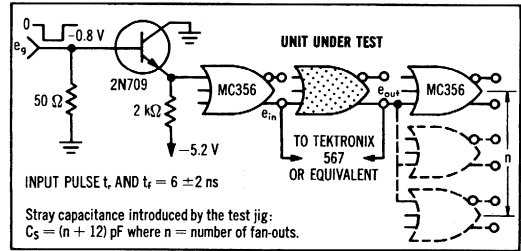


PROPAGATION DELAY




RISE AND FALL TIME



TYPICAL INPUT CHARACTERISTICS



TYPICAL OUTPUT CHARACTERISTICS




MC359, MC360, MC361 (continued)

ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions V _{dc} ±1%					dV _{in} Pin No	I _L Pin No	Ground Pin No	Symbol Pin No in ()	Test Limits						Unit
	@ Test Temperature									0°C		+25°C		+75°C		
	0°C	+25°C	+75°C	Min	Max					Min	Max	Min	Max			
Power Supply	MC359, MC360	—	—	—	2,7,8,9,10	1	—	3	I _E (2)	—	13.55	—	13.0	—	12.0	mAdc
Drain Current	MC361	—	—	—	2,7,8,9,10	1	—	3	I _E (2)	—	10.5	—	10.1	—	9.2	mAdc
Input Current	7	—	—	—	2,8,9,10	1	—	3	I _{in} (7)	—	—	—	100	—	—	μAdc
	8	—	—	—	2,7,9,10	1	—	3	I _{in} (8)	—	—	—	—	—	—	↓
	9	—	—	—	2,7,8,10	1	—	3	I _{in} (9)	—	—	—	—	—	—	↓
	10	—	—	—	2,7,8,9	1	—	3	I _{in} (10)	—	—	—	—	—	—	↓
"NOR" Logical "1" Output Voltage	—	—	7	—	2,8,9,10	1	—	3	V _i (6)	-0.715	-0.850	-0.670	-0.795	-0.590	-0.725	V _{dc}
	—	—	8	—	2,7,9,10	1	—	3	V _i (6)	↓	↓	↓	↓	↓	↓	↓
	—	—	9	—	2,7,8,10	1	—	3	V _i (5)	↓	↓	↓	↓	↓	↓	↓
	—	—	10	—	2,7,8,9	1	—	3	V _i (5)	↓	↓	↓	↓	↓	↓	↓
"NOR" Logical "0" Output Voltage	—	7	—	—	2,8,9,10	1	—	3	V _a (6)	-1.510	-1.880	-1.465	-1.750	-1.395	-1.730	V _{dc}
	—	8	—	—	2,7,9,10	1	—	3	V _a (6)	↓	↓	↓	↓	↓	↓	↓
	—	9	—	—	2,7,8,10	1	—	3	V _a (5)	↓	↓	↓	↓	↓	↓	↓
	—	10	—	—	2,7,8,9	1	—	3	V _a (5)	↓	↓	↓	↓	↓	↓	↓
"NOR" Output Voltage Change (No load to full load)	—	—	—	—	2,7,8,9,10	1	—	6Ⓞ	ΔV _i (6)	—	-0.055	—	-0.055	—	-0.065	V _{dc}
	—	—	—	—	2,7,8,9,10	1	—	5Ⓞ	ΔV _i (5)	—	-0.055	—	-0.055	—	-0.065	V _{dc}
"NOR" Saturation Breakpoint Voltage	—	—	—	—	2,8,9,10	1	7Ⓞ	3	V ₃ (6)	—	-0.51	—	-0.55	—	-0.63	V _{dc}
	—	—	—	—	2,7,9,10	1	8Ⓞ	3	V ₃ (6)	—	↓	—	↓	—	↓	↓
	—	—	—	—	2,7,8,10	1	9Ⓞ	3	V ₃ (5)	—	↓	—	↓	—	↓	↓
	—	—	—	—	2,7,8,9	1	10Ⓞ	3	V ₃ (5)	—	↓	—	↓	—	↓	↓
Switching Times	Pulse In	Pulse Out								Typ	Max	Typ	Max	Typ	Max	
Propagation Delay Time	7	6	—	—	2,8,9,10	1	—	3	t _{er} (6)	6.5	11.0	6.5	11.0	8.0	14.5	ns
	10	5	—	—	2,7,8,9	1	—	3	t _{er} (5)	6.5	11.0	6.5	11.0	8.0	14.5	
	7	6	—	—	2,8,9,10	1	—	3	t _{ez} (6)	8.5	13.5	8.5	13.5	10.0	16.0	
	10	5	—	—	2,7,8,9	1	—	3	t _{ez} (5)	8.5	13.5	8.5	13.5	10.0	16.0	
Rise Time	7	6	—	—	2,8,9,10	1	—	3	t _r (6)	8.5	12.5	9.0	12.5	11.0	15.5	↓
	10	5	—	—	2,7,8,9	1	—	3	t _r (5)	8.5	12.5	9.0	12.5	11.0	15.5	
Fall Time	7	6	—	—	2,8,9,10	1	—	3	t _f (6)	9.0	14.0	9.5	14.0	11.5	17.0	↓
	10	5	—	—	2,7,8,9	1	—	3	t _f (5)	9.0	14.0	9.5	14.0	11.5	17.0	

Pins not listed are left open For MC360, connect pin 4 to pin 5 for all tests Ⓞ Input voltage is adjusted to obtain dV "NOR" / dV_{in} = 0.
 Ⓞ Current test conditions: no load = 0; full load = -2.5 mAdc ±5%.

SWITCHING CHARACTERISTICS (10% to 90% distribution)

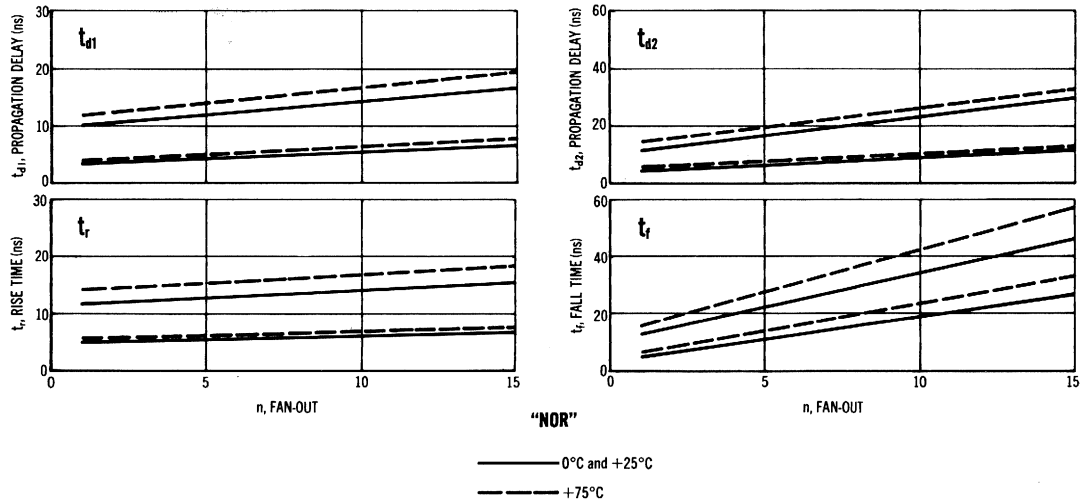


DUAL 3-INPUT GATE


MECL MC350 series

MC362A


Dual 3-input gate that provides the positive logic "NOR" function, and features an internal bias driver. This gate is available without bias driver as MC362.

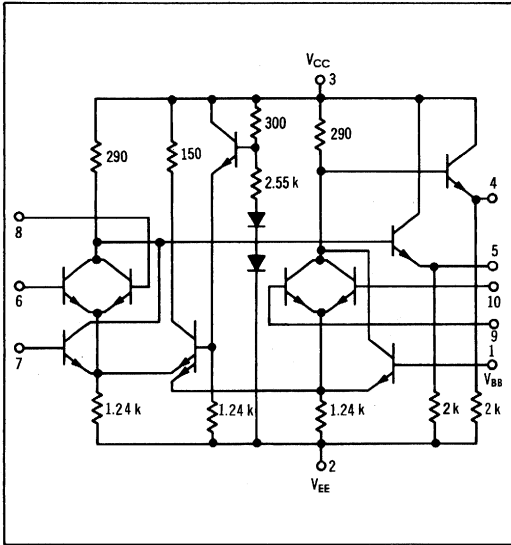


SWITCHING TIME TEST CIRCUIT

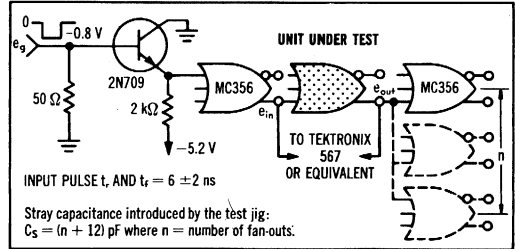


PROPAGATION DELAY




RISE AND FALL TIME



TYPICAL INPUT CHARACTERISTICS



TYPICAL OUTPUT CHARACTERISTICS



MC362A (continued)





ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions				dV_{in}	I_L	Ground	Symbol Pin No in ()	Test Limits						Unit
	$V_{dc} \pm 1\%$								0°C		+25°C		+75°C		
	V_{IH} Pin No	$V_{I,max}$ Pin No	V_L Pin No	V_{EE} Pin No					Min	Max	Min	Max	Min	Max	
Power Supply Drain Current	—	—	—	1,2,6,7,8,9,10	—	—	3	$I_{E(2)}$	—	17.7	—	17.0	—	16.4	mAdc
Input Current	1	—	—	2,6,7,8,9,10	—	—	3	$I_{in(1)}$	—	—	—	100	—	—	μ Adc
	6	—	—	1,2,7,8,9,10	—	—	3	$I_{in(6)}$	—	—	—	—	—	—	↓
	7	—	—	1,2,6,8,9,10	—	—	3	$I_{in(7)}$	—	—	—	—	—	—	↓
	8	—	—	1,2,6,7,9,10	—	—	3	$I_{in(8)}$	—	—	—	—	—	—	↓
	9	—	—	1,2,6,7,8,10	—	—	3	$I_{in(9)}$	—	—	—	—	—	—	↓
	10	—	—	1,2,6,7,8,9	—	—	3	$I_{in(10)}$	—	—	—	—	—	—	↓
"NOR" Logical "1" Output Voltage	—	—	6	1,2,7,8,9,10	—	—	3	$V_I(5)$	-0.715	-0.850	-0.670	-0.795	-0.590	-0.725	Vdc
	—	—	7	1,2,6,8,9,10	—	—	3	$V_I(5)$	↓	↓	↓	↓	↓	↓	↓
	—	—	8	1,2,6,7,9,10	—	—	3	$V_I(5)$	↓	↓	↓	↓	↓	↓	↓
	—	—	1	2,6,7,8,9,10	—	—	3	$V_I(4)$	↓	↓	↓	↓	↓	↓	↓
	—	—	9	1,2,6,7,8,10	—	—	3	$V_I(4)$	↓	↓	↓	↓	↓	↓	↓
	—	—	10	1,2,6,7,8,9	—	—	3	$V_I(4)$	↓	↓	↓	↓	↓	↓	↓
"NOR" Logical "0" Output Voltage	—	6	—	1,2,7,8,9,10	—	—	3	$V_A(5)$	-1.510	-1.880	-1.465	-1.750	-1.395	-1.730	Vdc
	—	7	—	1,2,6,8,9,10	—	—	3	$V_A(5)$	↓	↓	↓	↓	↓	↓	↓
	—	8	—	1,2,6,7,9,10	—	—	3	$V_A(5)$	↓	↓	↓	↓	↓	↓	↓
	—	1	—	2,6,7,8,9,10	—	—	3	$V_A(4)$	↓	↓	↓	↓	↓	↓	↓
	—	9	—	1,2,6,7,8,10	—	—	3	$V_A(4)$	↓	↓	↓	↓	↓	↓	↓
	—	10	—	1,2,6,7,8,9	—	—	3	$V_A(4)$	↓	↓	↓	↓	↓	↓	↓
"NOR" Output Voltage Change	—	—	6	1,2,7,8,9,10	—	5⊙	3	$\Delta V_I(5)$	—	-0.055	—	-0.055	—	-0.065	Volts
	—	—	1	2,6,7,8,9,10	—	4⊙	3	$\Delta V_I(4)$	—	-0.055	—	-0.055	—	-0.065	Volts
"NOR" Saturation Breakpoint Voltage	—	—	—	1,2,7,8,9,10	6⊙	—	3	$V_3(5)$	—	-0.51	—	-0.55	—	-0.63	Vdc
	—	—	—	1,2,6,8,9,10	7⊙	—	3	$V_3(5)$	—	—	—	—	—	—	↓
	—	—	—	1,2,6,7,9,10	8⊙	—	3	$V_3(5)$	—	—	—	—	—	—	↓
	—	—	—	2,6,7,8,9,10	1⊙	—	3	$V_3(4)$	—	—	—	—	—	—	↓
	—	—	—	1,2,6,7,8,10	9⊙	—	3	$V_3(4)$	—	—	—	—	—	—	↓
	—	—	—	1,2,6,7,8,9	10⊙	—	3	$V_3(4)$	—	—	—	—	—	—	↓
Switching Times	Pulse In	Pulse Out							Typ	Max	Typ	Max	Typ	Max	
Propagation Delay Time	6	5	—	1,2,7,8,9,10	—	—	3	$t_{pd}(5)$	6.5	10.5	6.5	10.5	7.5	11.5	ns
	1	4	—	2,6,7,8,9,10	—	—	3	$t_{pd}(4)$	6.5	10.5	6.5	10.5	7.5	11.5	
	6	5	—	1,2,7,8,9,10	—	—	3	$t_{pd}(5)$	8.5	11.5	8.5	11.5	10.0	15.0	
	1	4	—	2,6,7,8,9,10	—	—	3	$t_{pd}(4)$	8.5	11.5	8.5	11.5	10.0	15.0	
Rise Time	6	5	—	1,2,7,8,9,10	—	—	3	$t_r(5)$	9.0	12.5	9.5	12.5	11.5	15.5	
	1	4	—	2,6,7,8,9,10	—	—	3	$t_r(4)$	9.0	12.5	9.5	12.5	11.5	15.5	
Fall Time	6	5	—	1,2,7,8,9,10	—	—	3	$t_f(5)$	8.5	14.0	9.0	14.0	11.5	17.0	
	1	4	—	2,6,7,8,9,10	—	—	3	$t_f(4)$	8.5	14.0	9.0	14.0	11.5	17.0	

Pins not listed are left open.

⊙ Input voltage is adjusted to obtain dV "NOR" / $dV_{in} = 0$. ⊕ Current test conditions: no load = 0; full load = -2.5 mAdc $\pm 5\%$.

SWITCHING CHARACTERISTICS (10% to 90% distribution)

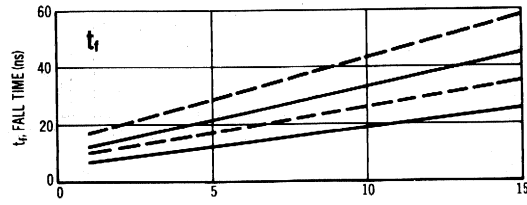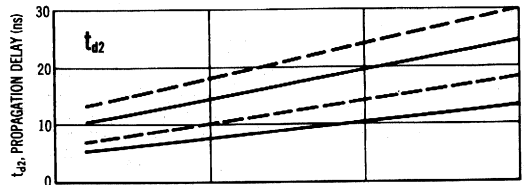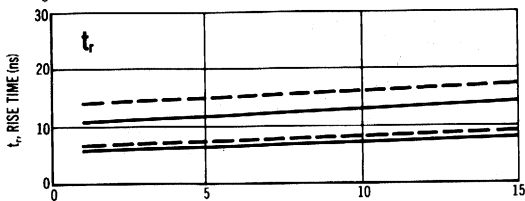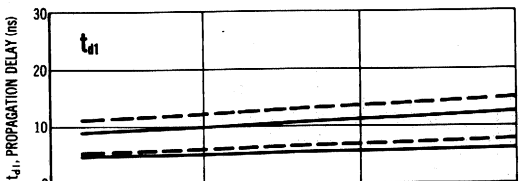

n, FAN-OUT

"NOR"


— 0°C and +25°C
 - - - +75°C

QUAD 2-INPUT GATE


MECL MC350 series

MC363F


Quad 2-input gate that provides the positive logic "NOR" function, and features an internal bias driver.

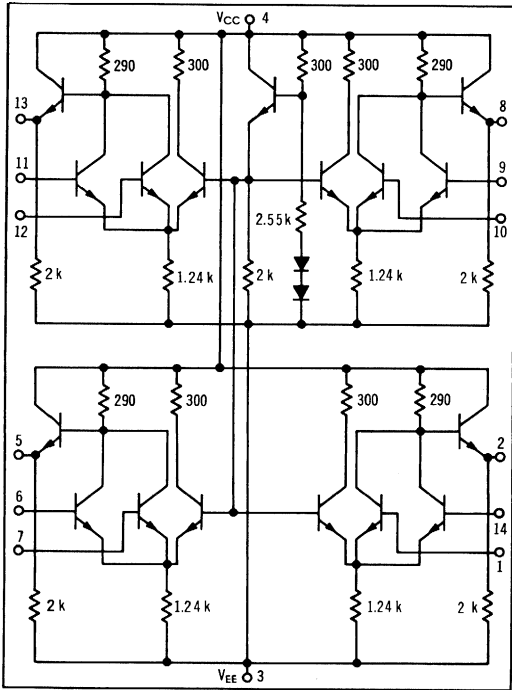


SWITCHING TIME TEST CIRCUIT

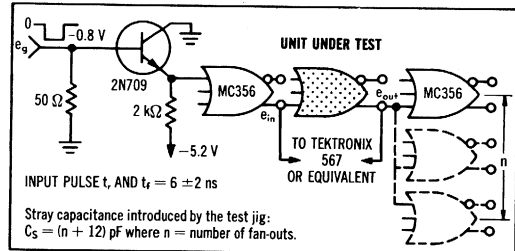


PROPAGATION DELAY




RISE AND FALL TIME



TYPICAL OUTPUT CHARACTERISTICS



TYPICAL INPUT CHARACTERISTICS




MC363F (continued)

ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions				dV _{in}	I _L	Ground	Symbol Pin No in ()	Test Limits						Unit
	V _{dc} ± 1%								0°C		+25°C		+75°C		
	0°C	+25°C	+75°C						Min	Max	Min	Max	Min	Max	
Power Supply Drain Current	—	—	—	1,3,6,7,9,10,11,12,14	—	—	4	I _{EE} (3)	—	31.0	—	30.0	—	29.0	mAdc
Input Current	1	—	—	3,6,7,9,10,11,12,14	—	—	4	I _{in} (1)	—	—	—	100	—	—	μAdc
	6	—	—	1,3,7,9,10,11,12,14	—	—	4	I _{in} (6)	—	—	—	—	—	—	
	7	—	—	1,3,6,9,10,11,12,14	—	—	4	I _{in} (7)	—	—	—	—	—		
	9	—	—	1,3,6,7,10,11,12,14	—	—	4	I _{in} (9)	—	—	—	—	—		
	10	—	—	1,3,6,7,9,11,12,14	—	—	4	I _{in} (10)	—	—	—	—	—		
	11	—	—	1,3,6,7,9,10,12,14	—	—	4	I _{in} (11)	—	—	—	—	—		
	12	—	—	1,3,6,7,9,10,11,14	—	—	4	I _{in} (12)	—	—	—	—	—		
14	—	—	1,3,6,7,9,10,11,12	—	—	4	I _{in} (14)	—	—	—	—	—			
"NOR" Logical "1" Output Voltage	—	—	1	3,6,7,9,10,11,12,14	—	—	4	V ₁ (2)	-0.715	-0.850	-0.670	-0.795	-0.590	-0.725	Vdc
	—	—	6	1,3,7,9,10,11,12,14	—	—	4	V ₁ (5)	—	—	—	—	—		
	—	—	7	1,3,6,9,10,11,12,14	—	—	4	V ₁ (5)	—	—	—	—	—		
	—	—	9	1,3,6,7,10,11,12,14	—	—	4	V ₁ (8)	—	—	—	—	—		
	—	—	10	1,3,6,7,9,11,12,14	—	—	4	V ₁ (8)	—	—	—	—	—		
	—	—	11	1,3,6,7,9,10,12,14	—	—	4	V ₁ (13)	—	—	—	—	—		
	—	—	12	1,3,6,7,9,10,11,14	—	—	4	V ₁ (13)	—	—	—	—	—		
"NOR" Logical "0" Output Voltage	—	—	1	3,6,7,9,10,11,12,14	—	—	4	V ₄ (2)	-1.510	-1.880	-1.465	-1.750	-1.395	-1.730	Vdc
	—	—	6	1,3,7,9,10,11,12,14	—	—	4	V ₄ (5)	—	—	—	—	—		
	—	—	7	1,3,6,9,10,11,12,14	—	—	4	V ₄ (5)	—	—	—	—	—		
	—	—	9	1,3,6,7,10,11,12,14	—	—	4	V ₄ (8)	—	—	—	—	—		
	—	—	10	1,3,6,7,9,11,12,14	—	—	4	V ₄ (8)	—	—	—	—	—		
	—	—	11	1,3,6,7,9,10,12,14	—	—	4	V ₄ (13)	—	—	—	—	—		
	—	—	12	1,3,6,7,9,10,11,14	—	—	4	V ₄ (13)	—	—	—	—	—		
"NOR" Output Voltage Change (No load to full load)	—	—	—	1,3,6,7,9,10,11,12,14	—	2 ⊙	4	ΔV ₁ (2)	—	-0.055	—	-0.055	—	-0.065	Volts
	—	—	—	1,3,6,7,9,10,11,12,14	—	5 ⊙	4	ΔV ₁ (5)	—	—	—	—	—		
	—	—	—	1,3,6,7,9,10,11,12,14	—	8 ⊙	4	ΔV ₁ (8)	—	—	—	—	—		
	—	—	—	1,3,6,7,9,10,11,12,14	—	13 ⊙	4	ΔV ₁ (13)	—	—	—	—	—		
"NOR" Saturation Breakpoint Voltage	—	—	—	3,6,7,9,10,11,12,14	1 ⊙	—	4	V ₃ (2)	—	-0.51	—	-0.55	—	-0.63	Vdc
	—	—	—	1,3,6,9,10,11,12,14	7 ⊙	—	4	V ₃ (5)	—	—	—	—	—		
	—	—	—	1,3,6,7,9,11,12,14	10 ⊙	—	4	V ₃ (8)	—	—	—	—	—		
	—	—	—	1,3,6,7,9,10,11,14	12 ⊙	—	4	V ₃ (13)	—	—	—	—	—		
Switching Time Propagation Delay Time	Pulse In	Pulse Out	—	3,6,7,9,10,11,12,14	—	—	4	t _{pd} (2)	Typ	Max	Typ	Max	Typ	Max	ns
	1	2	—	1,3,7,9,10,11,12,14	—	—	4	t _{pd} (5)	6.5	11.0	6.5	11.0	8.0	14.5	
	6	5	—	1,3,6,7,10,11,12,14	—	—	4	t _{pd} (8)	—	—	—	—	—		
	9	8	—	1,3,6,7,9,10,12,14	—	—	4	t _{pd} (13)	—	—	—	—	—		
	11	13	—	3,6,7,9,10,11,12,14	—	—	4	t _{pd} (2)	8.5	13.5	8.5	13.5	10.0	16.0	
	1	2	—	1,3,7,9,10,11,12,14	—	—	4	t _{pd} (5)	—	—	—	—	—		
	6	5	—	1,3,6,7,10,11,12,14	—	—	4	t _{pd} (8)	—	—	—	—	—		
Rise Time	1	2	—	3,6,7,9,10,11,12,14	—	—	4	t _r (2)	8.5	12.5	9.0	12.5	11.0	15.5	
	6	5	—	1,3,7,9,10,11,12,14	—	—	4	t _r (5)	—	—	—	—	—		
	9	8	—	1,3,6,7,10,11,12,14	—	—	4	t _r (8)	—	—	—	—	—		
	11	13	—	1,3,6,7,9,10,12,14	—	—	4	t _r (13)	—	—	—	—	—		
Fall Time	1	2	—	3,6,7,9,10,11,12,14	—	—	4	t _f (2)	9.0	14.0	9.5	14.0	11.5	17.0	
	6	5	—	1,3,7,9,10,11,12,14	—	—	4	t _f (5)	—	—	—	—	—		
	9	8	—	1,3,6,7,10,11,12,14	—	—	4	t _f (8)	—	—	—	—	—		
	11	13	—	1,3,6,7,9,10,12,14	—	—	4	t _f (13)	—	—	—	—	—		

Pins not listed are left open. ⊙ Input voltage is adjusted to obtain dV "NOR". dV_{in} = 0. ⊙ Current test conditions: no load = 0; full load = -2.5 mAdc ± 5%.

SWITCHING CHARACTERISTICS (10% to 90% distribution)

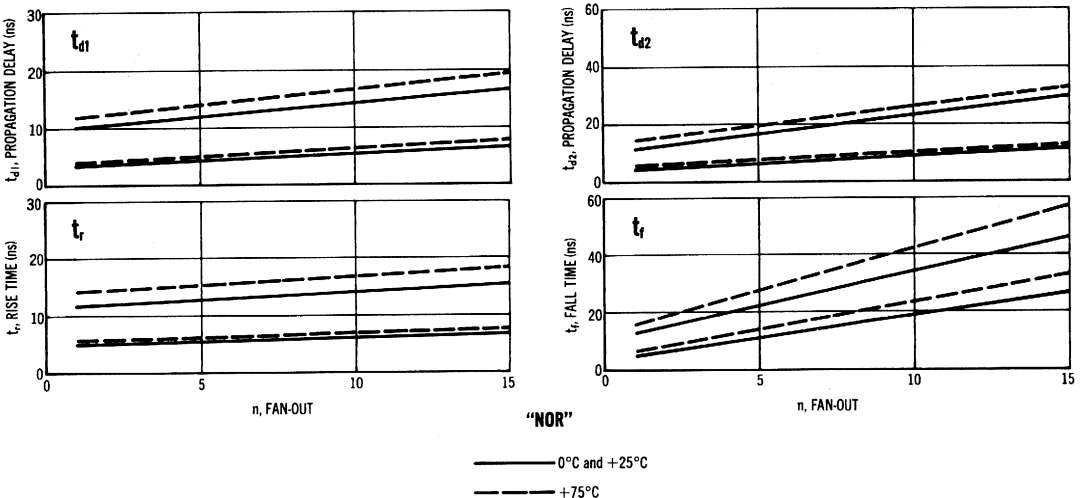


R-S FLIP-FLOP


MECL MC350 series

MC352A


DC Set-Reset flip-flop with an expandable input and buffered outputs. This flip-flop is available without buffered outputs as MC352.

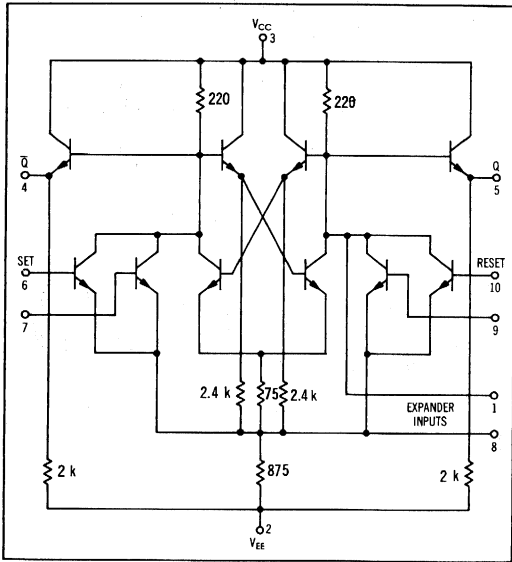


SWITCHING TIME TEST CIRCUIT

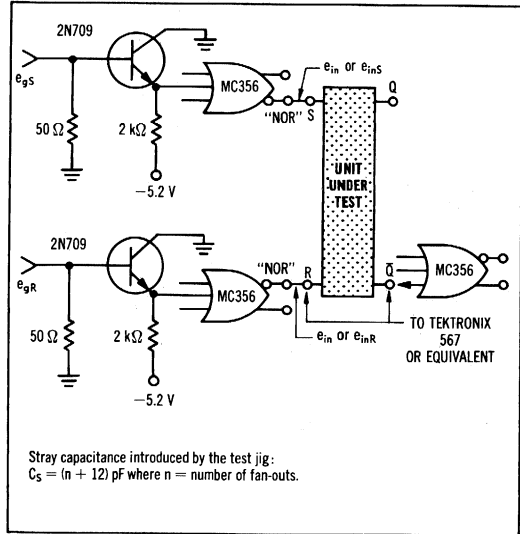

TRANSFER CHARACTERISTICS

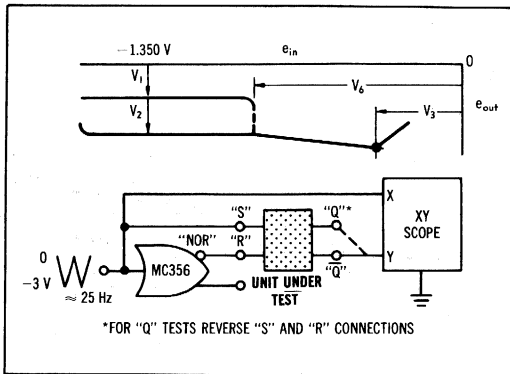

SWITCHING TIME WAVEFORMS

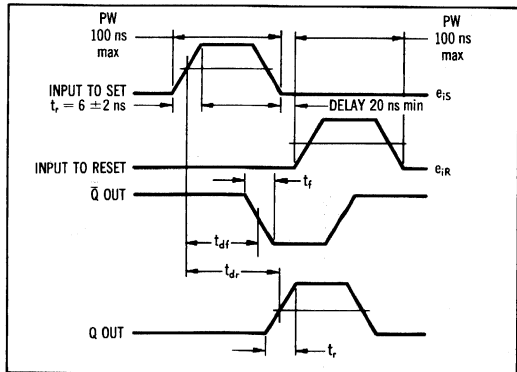



MC352A (continued)

ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions V _{dc} ± 1%				dV _{in} Pin No	I _L Pin No	Ground Pin No	Symbol Pin No in ()	Test Limits						Unit
	@ Test Temperature		0°C						+25°C		+75°C				
	V _H Pin No	V _{I max} Pin No	V _I Ⓞ Pin No	V _{EE} Pin No					Min	Max	Min	Max	Min	Max	
Power Supply Drain Current	—	—	—	2,6,7,9,10	—	—	3	I _E (6)	—	10.35	—	10.35	—	9.52	mAdc
Input Current	6	—	—	2,7,9,10	—	—	3	I _{in} (6)	—	—	—	100	—	—	μAdc
	7	—	—	2,6,9,10	—	—	3	I _{in} (7)	—	—	—	—	—	—	↓
	9	—	—	2,6,7,10	—	—	3	I _{in} (9)	—	—	—	—	—	—	↓
	10	—	—	2,6,7,9	—	—	3	I _{in} (10)	—	—	—	—	—	—	↓
"Q" Logical "1" Output Voltage	—	—	6	2,7,9,10	—	—	3	V _I (5)	-0.715	-0.850	-0.670	-0.795	-0.590	-0.725	Vdc
	—	—	7	2,6,9,10	—	—	3	V _I (5)	-0.715	-0.850	-0.670	-0.795	-0.590	-0.725	Vdc
"Q" Logical "0" Output Voltage	—	—	9	2,6,7,10	—	—	3	V _S (5)	-1.510	-1.880	-1.465	-1.750	-1.395	-1.730	Vdc
	—	—	10	2,6,7,9	—	—	3	V _S (5)	-1.510	-1.880	-1.465	-1.750	-1.395	-1.730	Vdc
"Q̄" Logical "1" Output Voltage	—	—	9	2,6,7,10	—	—	3	V _I (4)	-0.715	-0.850	-0.670	-0.795	-0.590	-0.725	Vdc
	—	—	10	2,6,7,9	—	—	3	V _I (4)	-0.715	-0.850	-0.670	-0.795	-0.590	-0.725	Vdc
"Q̄" Logical "0" Output Voltage	—	—	6	2,7,9,10	—	—	3	V _S (4)	-1.510	-1.880	-1.465	-1.750	-1.395	-1.730	Vdc
	—	—	7	2,6,9,10	—	—	3	V _S (4)	-1.510	-1.880	-1.465	-1.750	-1.395	-1.730	Vdc
"Q" Output Voltage Change	—	6	—	2,7,9,10	—	5Ⓞ	3	ΔV _I (5)	—	-0.065	—	-0.065	—	-0.075	Volts
"Q̄" Output Voltage Change	—	10	—	2,6,7,9	—	4Ⓞ	3	ΔV _I (4)	—	-0.065	—	-0.065	—	-0.075	Volts
"Q" Saturation Breakpoint Voltage	—	—	—	2,7,9	6,10Ⓞ	—	3	V _S (5)	—	-0.61	—	-0.65	—	-0.73	Vdc
"Q̄" Saturation Breakpoint Voltage	—	—	—	2,7,9	6,10Ⓞ	—	3	V _S (4)	—	-0.61	—	-0.65	—	-0.73	Vdc
"Q" or "Q̄" Latch Voltage	—	—	—	2,7,9	6,10Ⓞ	—	3	V _L (6,10)	-1.11	-1.25	-1.09	-1.21	-1.02	-1.14	Vdc
Switching Times	Pulse In	Pulse Out							Typ	Max	Typ	Max	Typ	Max	
Propagation Delay Time	6,10	4,5	—	2,7,9	—	—	3	t _{dr} (4,5)	10.0	16.0	10.5	16.0	13.5	22.0	ns
	6,10	4,5	—	2,7,9	—	—	3	t _{df} (4,5)	11.0	19.5	11.5	19.5	14.0	22.0	
Rise Time	6,10	4,5	—	2,7,9	—	—	3	t _r (4,5)	11.0	19.0	11.5	19.0	13.5	26.0	
Fall Time	6,10	4,5	—	2,7,9	—	—	3	t _f (4,5)	12.0	19.5	12.5	19.5	14.0	26.0	

Pins not listed are left open. Ⓞ Input voltage is adjusted to obtain dV_I / dV_{in} = 0; dV_I / dV_{in} = 0. Ⓞ Current test conditions: no load = 0; full load = -2.5 mAdc ± 5%.
 Ⓞ Apply momentary V_{I max} to set output, then V_I for measurement. Ⓞ Input voltage is adjusted to obtain dV_I / dV_{in} = ∞.


SWITCHING CHARACTERISTICS (10% to 90% distribution)

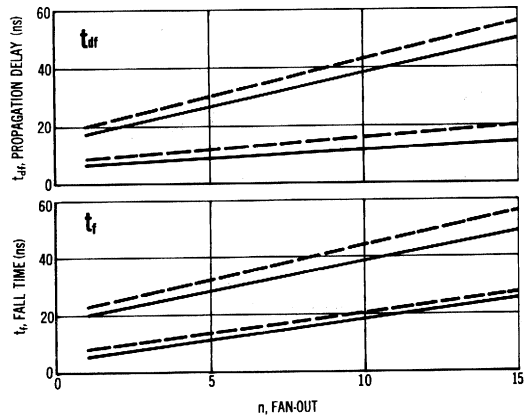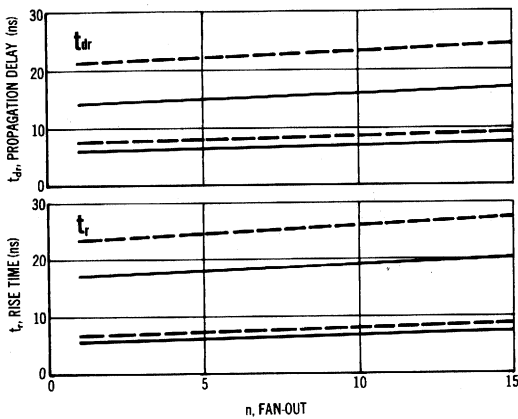

— 0°C and +25°C
 - - - +75°C

MC358A

AC-coupled J-K flip-flop with dc Set and Reset inputs and buffered outputs for counter and shift register applications up to 15 MHz.

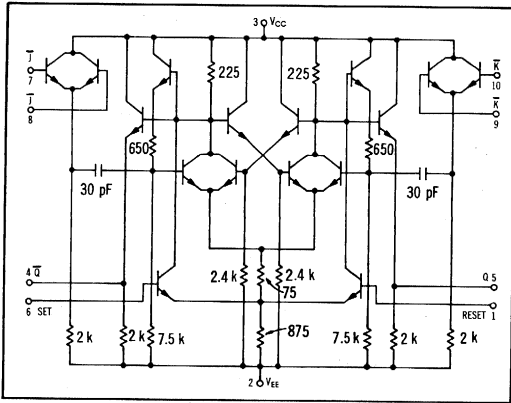

TRANSFER CHARACTERISTICS

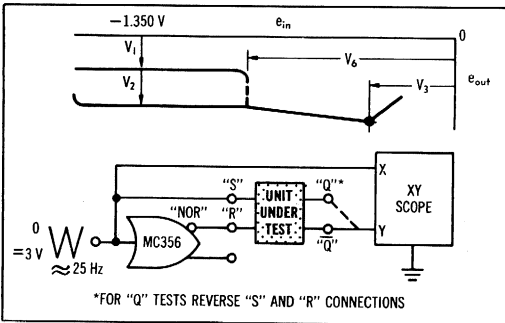


FIGURE 1 — SWITCHING TIME TEST CIRCUIT AND WAVEFORMS

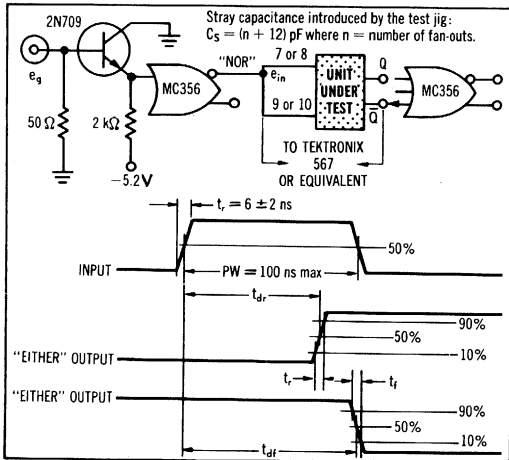


FIGURE 2 — INPUT WAVEFORM TO ESTABLISH MINIMUM TOGGLE FREQUENCY




FIGURE 3 — SENSITIVITY (NO TOGGLE)


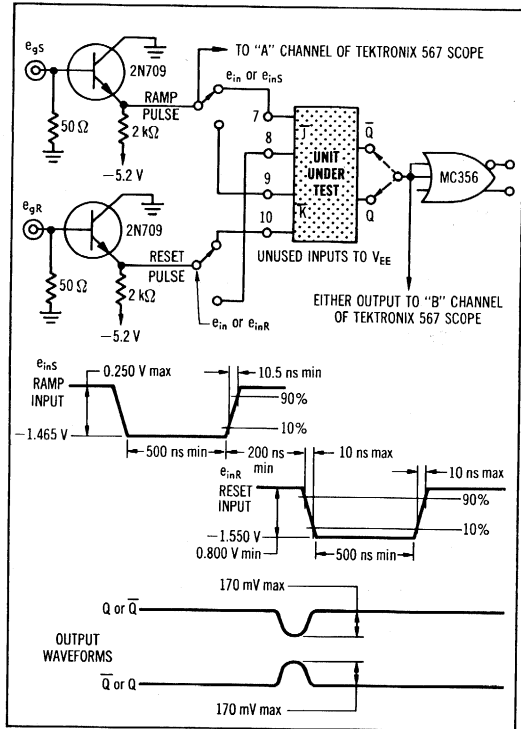


FIGURE 4 — SENSITIVITY (TOGGLE)

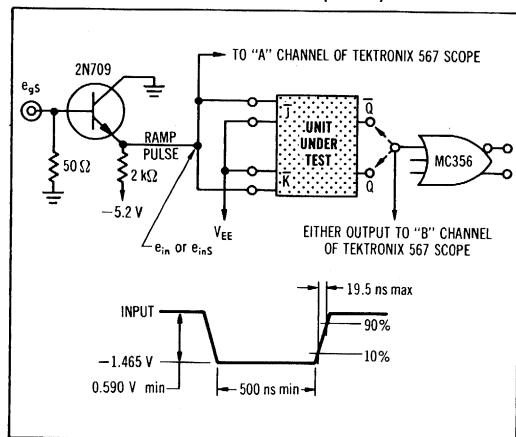


ELECTRICAL CHARACTERISTICS

Characteristic	V _H Pin No	V _{I max} Pin No	Test Conditions V _{dc} ± 1%			dV _{in} Pin No	I _L Pin No	Ground Pin No	Symbol Pin No in ()	Test Limits						Unit
			0°C		+25°C					+75°C						
			Min	Max	Min					Max	Min	Max				
Power Supply Drain Current	—	7,10	—	1,2,6,8,9	—	—	3	I _E (2)	—	22.0	—	21.0	—	19.6	mAdc	
Input Current	7	—	—	1,2,6,8,9,10	—	—	3	I _{in} (7)	—	—	—	100	—	—	μAdc	
	8	—	—	1,2,6,7,9,10	—	—	3	I _{in} (8)	—	—	—	—	—	—	↓	
	9	—	—	1,2,6,7,8,10	—	—	3	I _{in} (9)	—	—	—	—	—	—	↓	
	10	—	—	1,2,6,7,8,9	—	—	3	I _{in} (10)	—	—	—	—	—	—	↓	
"Q" Logical "1" Output Voltage	—	—	6	1,2,7,8,9,10	—	—	3	V ₁ (5)	-0.715	-0.850	-0.670	-0.795	-0.590	-0.725	Vdc	
"Q" Logical "0" Output Voltage	—	—	1	2,6,7,8,9,10	—	—	3	V ₂ (5)	-1.510	-1.880	-1.465	-1.750	-1.395	-1.730	Vdc	
"Q̄" Logical "1" Output Voltage	—	—	1	2,6,7,8,9,10	—	—	3	V ₁ (4)	-0.715	-0.850	-0.670	-0.795	-0.590	-0.725	Vdc	
"Q̄" Logical "0" Output Voltage	—	—	6	1,2,7,8,9,10	—	—	3	V ₂ (4)	-1.510	-1.880	-1.465	-1.750	-1.395	-1.730	Vdc	
"Q" Output Voltage Change	—	6	—	1,2,7,8,9,10	—	5⊕	3	ΔV ₁ (5)	—	-0.065	—	-0.065	—	-0.075	Volts	
"Q̄" Output Voltage Change	—	1	—	2,6,7,8,9,10	—	4⊕	3	ΔV ₁ (4)	—	-0.065	—	-0.065	—	-0.075	Volts	
"Q" Saturation Breakpoint Voltage	—	—	—	1,2,7,8,9,10	6⊙	—	3	V ₃ (5)	—	-0.61	—	-0.65	—	-0.73	Vdc	
"Q̄" Saturation Breakpoint Voltage	—	—	—	2,6,7,8,9,10	1⊙	—	3	V ₃ (4)	—	-0.61	—	-0.65	—	-0.73	Vdc	
"Q" or "Q̄" Latch Voltage	—	—	—	2,7,8,9,10	1,6⊙	—	3	V ₆ (1,6)	-1.11	-1.25	-1.09	-1.21	-1.02	-1.14	Vdc	
Toggle Frequency (See Figures 1 and 2)	Pulse In	Pulse Out	—	1,2,6,9	—	—	3	f _{rog}	—	—	15	—	—	—	MHz	
	7,10	5														
	7,10	4														
Sensitivity (No Toggle)	8,9	5	—	1,2,6,8,9	—	—	3	← See Figure 3	→	← See Figure 3	→	← See Figure 3	→	← See Figure 3	→	ns
	7,10	4,5	—	1,2,6,7,10	—	—	3	← See Figure 4	→	← See Figure 4	→	← See Figure 4	→	← See Figure 4	→	
Switching Times Propagation Delay	7,10	4,5	—	1,2,6,8,9	—	—	3	t _{dr} (4,5)	Typ	Max	Typ	Max	Typ	Max	ns	
	7,10	4,5	—	1,2,6,8,9	—	—	3	t _{or} (4,5)	7.5	13.0	7.5	13.0	8.0	16.0		
Rise Time	7,10	4,5	—	1,2,6,8,9	—	—	3	t _r (4,5)	8.0	13.0	8.0	13.0	8.5	16.0		
	7,10	4,5	—	1,2,6,8,9	—	—	3	t _f (4,5)	10.5	15.5	11.0	15.5	12.5	22.0		


Pins not listed are left open. ⊙ Input voltage is adjusted to obtain dV_{out} / dV_{in} = "0". ⊕ Current test conditions: no load = 0 to full load = -2.5 mAdc ± 5%.
 ⊙ Apply momentary V_{I max} to set output, then V_I for measurement. ⊙ Input voltage is adjusted to obtain dV₁ / dV_{in} = ∞.

SWITCHING CHARACTERISTICS (10% to 90% distribution)

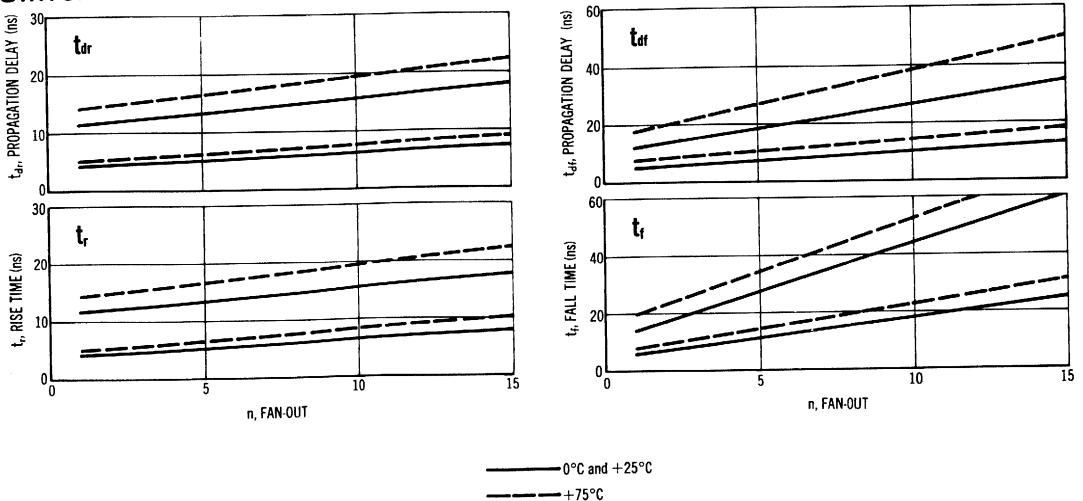

MC364

High-speed ac-coupled J-K flip-flop with dc Set and Reset input for counter and shift register applications up to 30 MHz operation.

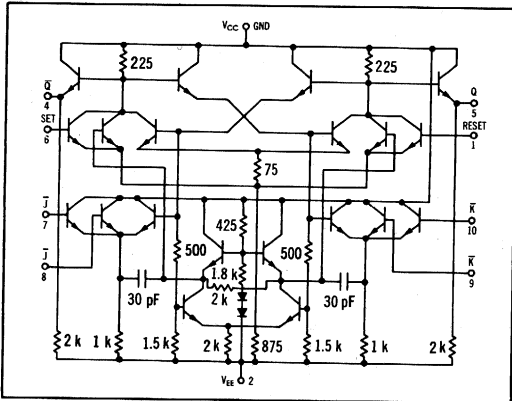

TRANSFER CHARACTERISTICS

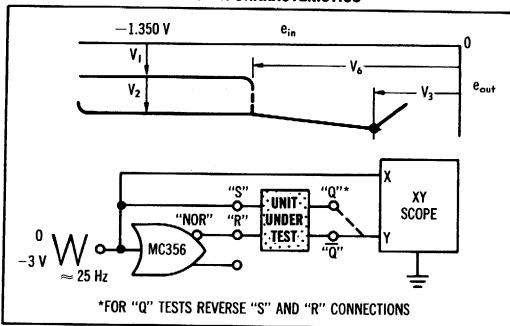


FIGURE 1 — SWITCHING TIME TEST CIRCUIT AND WAVEFORMS

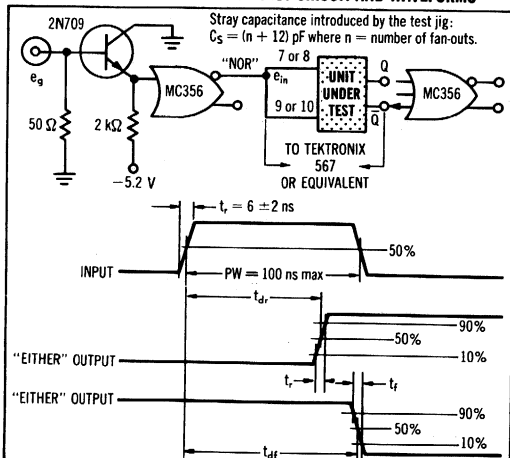


FIGURE 2 — INPUT WAVEFORM TO ESTABLISH MINIMUM TOGGLE FREQUENCY




FIGURE 3 — SENSITIVITY (NO TOGGLE)


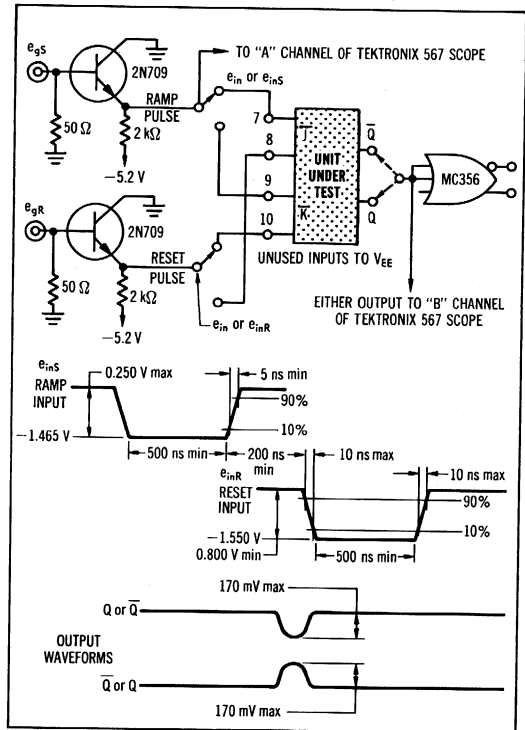


FIGURE 4 — SENSITIVITY (TOGGLE)

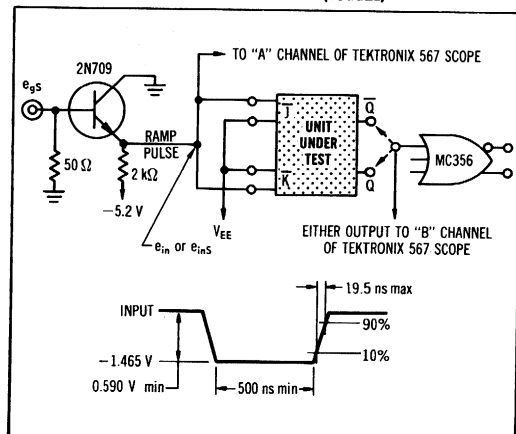



MC364 (continued)

ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions Vdc ± 1%				dVin Pin No	IL Pin No	Ground Pin No	Symbol Pin No in ()	Test Limits						Unit
	@ Test Temperature		0°C						+25°C		+75°C				
	VH Pin No	VI,max Pin No	VL Pin No	VEE Pin No					Min	Max	Min	Max	Min	Max	
Power Supply Drain Current	—	7,10	—	1,2,6,8,9	—	—	3	IE (2)	—	30.0	—	28.5	—	28.0	mAdc
Input Current	7	—	—	1,2,6,8,9,10	—	—	3	Iin (7)	—	—	—	100	—	—	μAdc
	8	—	—	1,2,6,7,9,10	—	—	3	Iin (8)	—	—	—	—	—	—	↓
	9	—	—	1,2,6,7,8,10	—	—	3	Iin (9)	—	—	—	—	—	—	↓
	10	—	—	1,2,6,7,8,9	—	—	3	Iin (10)	—	—	—	—	—	—	↓
"Q" Logical "1" Output Voltage	—	—	6⊕	1,2,7,8,9,10	—	—	3	V1 (5)	-0.715	-0.850	-0.670	-0.795	-0.590	-0.725	Vdc
"Q" Logical "0" Output Voltage	—	—	1⊕	2,6,7,8,9,10	—	—	3	V2 (5)	-1.510	-1.880	-1.465	-1.750	-1.395	-1.730	Vdc
"Q" Logical "1" Output Voltage	—	—	1⊕	2,6,7,8,9,10	—	—	3	V1 (4)	-0.715	-0.850	-0.670	-0.795	-0.590	-0.725	Vdc
"Q" Logical "0" Output Voltage	—	—	6⊕	1,2,7,8,9,10	—	—	3	V2 (4)	-1.510	-1.880	-1.465	-1.750	-1.395	-1.730	Vdc
"Q" Output Voltage Change	—	6	—	1,2,7,8,9,10	—	5⊕	3	ΔV1 (5)	—	-0.065	—	-0.065	—	-0.075	Volts
"Q" Output Voltage Change	—	1	—	2,6,7,8,9,10	—	4⊕	3	ΔV1 (4)	—	-0.065	—	-0.065	—	-0.075	Volts
"Q" Saturation Breakpoint Voltage	—	—	—	1,2,7,8,9,10	6⊕	—	3	V3 (5)	—	-0.61	—	-0.65	—	-0.73	Vdc
"Q" Saturation Breakpoint Voltage	—	—	—	2,6,7,8,9,10	1⊕	—	3	V3 (4)	—	-0.61	—	-0.65	—	-0.73	Vdc
"Q" or "Q" Latch Voltage	—	—	—	2,7,8,9,10	1,6⊕	—	3	V4 (1,6)	-1.11	-1.25	-1.09	-1.21	-1.02	-1.14	Vdc
Toggle Frequency (See Figures 1 and 2)	Pulse In 7,10	Pulse Out 5	—	1,2,6,9	—	—	3	fTog	—	—	30	—	—	—	MHz
Sensitivity (No Toggle)	7,10	4	—	1,2,6,8,9	—	—	3	← See Figure 3 →							
Sensitivity (Toggle)	8,9	5	—	1,2,6,7,10	—	—	3	← See Figure 3 →							
	7,10	4,5	—	1,2,6,8,9	—	—	3	← See Figure 4 →							
Switching Times	7,10	4,5	—	1,2,6,8,9	—	—	3	tdr (4,5)	Typ	Max	Typ	Max	Typ	Max	ns
									11.0	18.0	12.0	18.0	14.0	24.0	
									12.0	18.0	13.0	18.0	15.0	24.0	
									11.5	20.0	12.5	21.0	15.0	26.0	
Rise Time	7,10	4,5	—	1,2,6,8,9	—	—	3	tr (4,5)	Typ	Max	Typ	Max			
									11.5	18.0	12.5	21.0			
Fall Time	7,10	4,5	—	1,2,6,8,9	—	—	3	tr (4,5)	Typ	Max	Typ	Max			
									11.5	18.0	12.5	21.0			

Pins not listed are left open. ⊕ Input voltage is adjusted to obtain dVout/dVin = 0. ⊕ Current test conditions: no load = 0; full load = -2.5 mAdc ± 5%. ⊕ Apply momentary VI,max to set output, then VIN for measurement. ⊕ Input voltage is adjusted to obtain dV1/dVin = ∞.

SWITCHING CHARACTERISTICS (10% to 90% distribution)

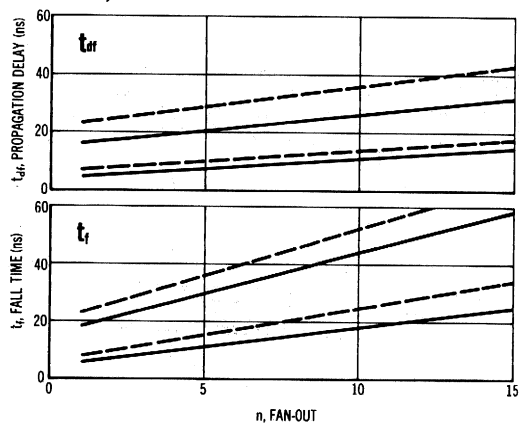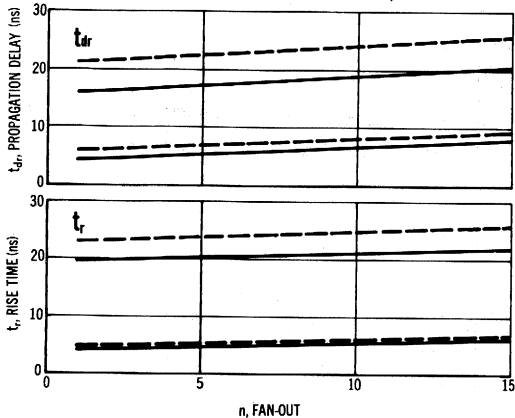


— 0°C and +25°C
- - - +75°C

HALF-ADDER



MECL MC350 series

MC353


Half-adder that provides the "SUM", "CARRY", and "NOR" functions simultaneously.

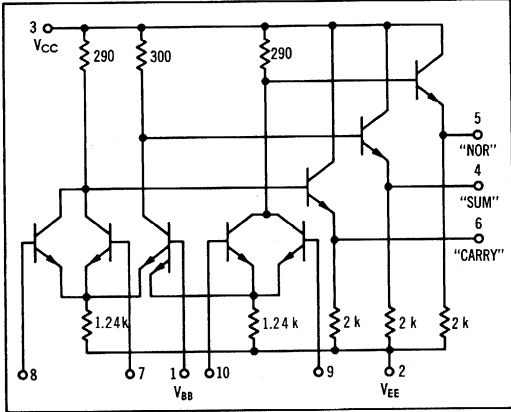



SWITCHING TIMES TEST CIRCUIT

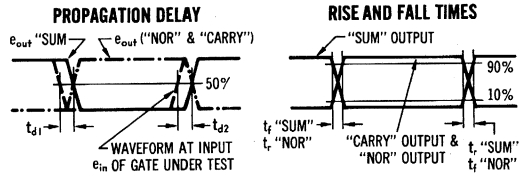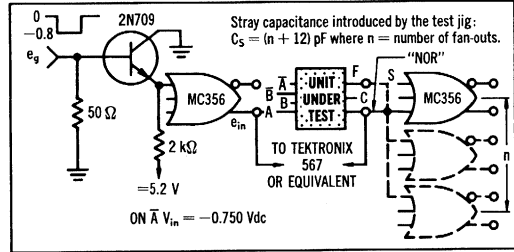

RECOVERY CHARACTERISTICS WITH SIMULTANEOUS "0" ON ALL INPUTS

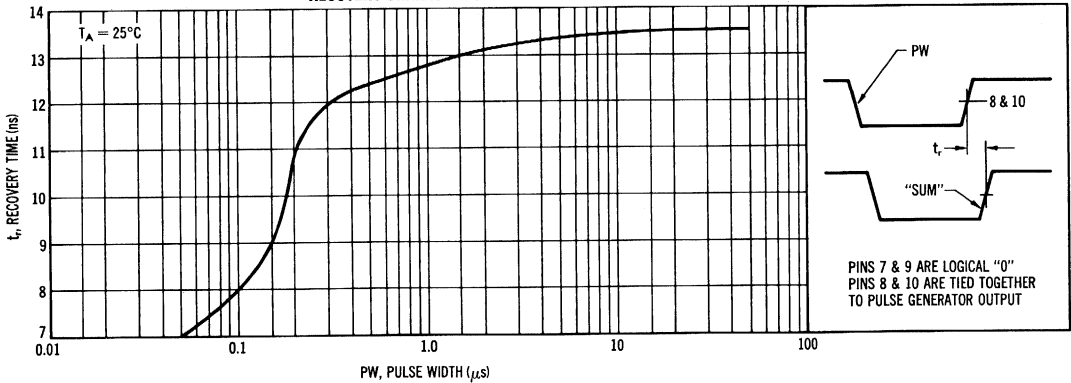

SWITCHING CHARACTERISTICS (10% to 90% distribution)

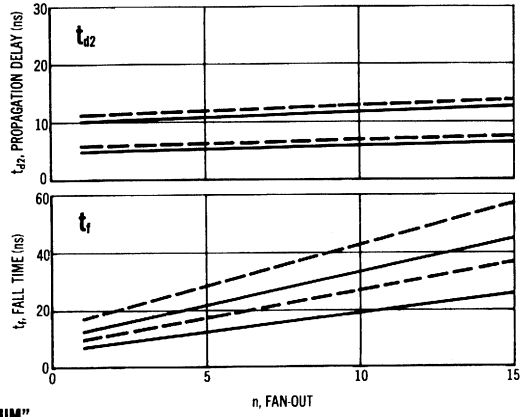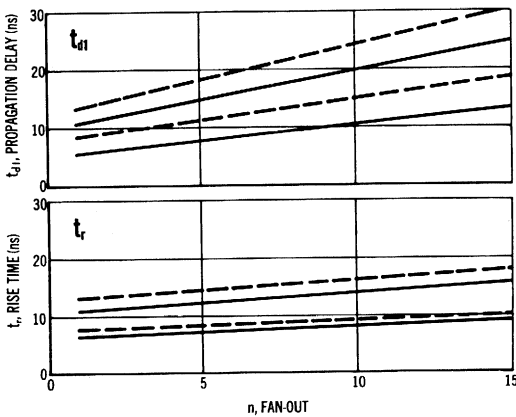

— 0°C and +25°C
 - - - +75°C


MC353 (continued)

ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions Vdc ± 1%					dV _{in} Pin No	I _L Pin No	Ground Pin No	Symbol Pin No in ()	Test Limits						Unit	
	V _H Pin No	V _{I max} Pin No	V _L Pin No	V _{EE} Pin No	V _{BB} Pin No					0°C		+25°C		+75°C			
										Min	Max	Min	Max	Min	Max		
Power Supply Drain Current	—	—	—	2,7,8,9,10	1	—	—	3	I _q (2)	—	15.9	—	15.3	—	14.1	mAdc	
Input Current	7	—	—	2,8,9,10	1	—	—	3	I _{in} (7)	—	—	—	100	—	—	μAdc	
	8	—	—	2,7,9,10	1	—	—	3	I _{in} (8)	—	—	—	—	—	—		
	9	—	—	2,7,8,10	1	—	—	3	I _{in} (9)	—	—	—	—	—	—		
	10	—	—	2,7,8,9	1	—	—	3	I _{in} (10)	—	—	—	—	—	—		
	—	—	—	2,7,8,9	1	—	—	3	I _{in} (10)	—	—	—	—	—	—		—
"NOR" Logical "1" Output Voltage	—	—	9	2,7,8,10	1	—	—	3	V _i (5) V _i (5)	-0.715	-0.850	-0.670	-0.795	-0.590	-0.725	Vdc	
"NOR" Logical "0" Output Voltage	—	9	—	2,7,8,10	1	—	—	3	V _e (5) V _e (5)	-1.510	-1.880	-1.465	-1.750	-1.395	-1.730	Vdc	
"CARRY" Logical "1" Output Voltage	—	—	7	2,8,9,10	1	—	—	3	V _i (6) V _i (6)	-0.715	-0.850	-0.670	-0.795	-0.590	-0.725	Vdc	
"CARRY" Logical "0" Output Voltage	—	—	8	2,7,9,10	1	—	—	3	V _e (6) V _e (6)	-1.510	-1.880	-1.465	-1.750	-1.395	-1.730	Vdc	
"SUM" Logical "1" Output Voltage	—	7,9	—	2,8,10	1	—	—	3	V _s (4) V _s (4)	-0.715	-0.850	-0.670	-0.795	-0.590	-0.725	Vdc	
"SUM" Logical "0" Output Voltage	—	8,10	—	2,7,9	1	—	—	3	V _s (4) V _s (4)	-0.715	-0.850	-0.670	-0.795	-0.590	-0.725	Vdc	
"NOR" Output Voltage Change (No load to full load)	—	7	—	2,8,9,10	1	—	—	3	V _i (4) V _i (4)	—	—	—	—	—	—	Volts	
	—	8	—	2,7,9,10	1	—	—	3	V _e (4) V _e (4)	—	—	—	—	—	—		
	—	9	—	2,7,10	1	—	—	3	V _e (4) V _e (4)	—	—	—	—	—	—		
"CARRY" Output Voltage Change (No load to full load)	—	7	10	2,8,9	1	—	—	3	V _i (5) V _i (5)	—	—	—	—	—	—	Volts	
	—	8	10	2,7,9	1	—	—	3	V _e (5) V _e (5)	—	—	—	—	—	—		
	—	9	8	2,7,10	1	—	—	3	V _e (5) V _e (5)	—	—	—	—	—	—		
"SUM" Output Voltage Change (No load to full load)	—	7,10	—	2,8,9	1	—	—	3	V _s (4) V _s (4)	—	—	—	—	—	—	Volts	
	—	8	10	2,7,9	1	—	—	3	V _s (4) V _s (4)	—	—	—	—	—	—		
	—	9	8	2,7,10	1	—	—	3	V _s (4) V _s (4)	—	—	—	—	—	—		
"NOR" Saturation Breakpoint Voltage	—	—	—	2,7,8,9	1	10⊕	—	3	V _i (5)	—	0.510	—	0.550	—	0.630	Vdc	
"CARRY" Saturation Breakpoint Voltage	—	—	—	2,8,9,10	1	7⊕	—	3	V _i (6)	—	0.510	—	0.550	—	0.630	Vdc	
Switching Times	Propagation Delay Time	—	—	—	2,7,8,9	1	10	5	3	t _{pd} (5)	Typ	Max	Typ	Max	Typ	Max	ns
		—	—	—	2,8,9,10	1	7	6	3	t _{pd} (6)	6.5	11.0	6.5	11.0	7.0	13.0	
		—	7	—	2,8,9	1	10	4	3	t _{pd} (4)	8.5	11.5	8.5	11.5	10.0	15.0	
		—	—	—	2,7,8,9	1	10	5	3	t _{pd} (5)	8.5	13.5	8.5	13.5	10.0	16.0	
		—	—	—	2,8,9,10	1	7	6	3	t _{pd} (6)	8.5	13.5	8.5	13.5	10.0	16.0	
	Rise Time	—	—	—	2,8,9	1	10	4	3	t _r (4)	6.0	11.0	6.0	11.0	7.5	12.0	
		—	—	—	2,7,8,9	1	10	5	3	t _r (5)	9.0	12.5	9.0	12.5	11.0	15.5	
		—	—	—	2,8,9,10	1	7	6	3	t _r (6)	9.0	12.5	9.0	12.5	11.0	15.5	
		—	7	—	2,8,9	1	10	4	3	t _r (4)	7.0	11.5	7.0	11.5	9.0	13.0	
		—	—	—	2,7,8,9	1	10	5	3	t _r (5)	9.0	14.0	9.5	14.0	11.5	17.0	
	Fall Time	—	—	—	2,8,9,10	1	7	6	3	t _f (6)	9.0	14.0	9.5	14.0	11.5	17.0	
		—	—	—	2,7,8,9	1	10	5	3	t _f (5)	9.0	14.0	9.5	14.0	11.5	17.0	
		—	—	—	2,8,9	1	10	4	3	t _f (4)	9.0	14.0	9.5	14.0	12.0	17.0	
		—	—	—	2,7,8,9	1	10	5	3	t _f (5)	9.0	14.0	9.5	14.0	12.0	17.0	
		—	7	—	2,8,9	1	10	4	3	t _f (4)	9.0	14.0	9.5	14.0	12.0	17.0	

Pins not listed are left open. ⊕ Input voltage is adjusted to obtain dV"NOR"/dV_{in} = 0 or dV "CARRY"/dV_{in} = 0.
 ⊗ Current test conditions: no load = 0; full load = -2.5 mAdc ± 5%.

SWITCHING CHARACTERISTICS (10% to 90% distribution)

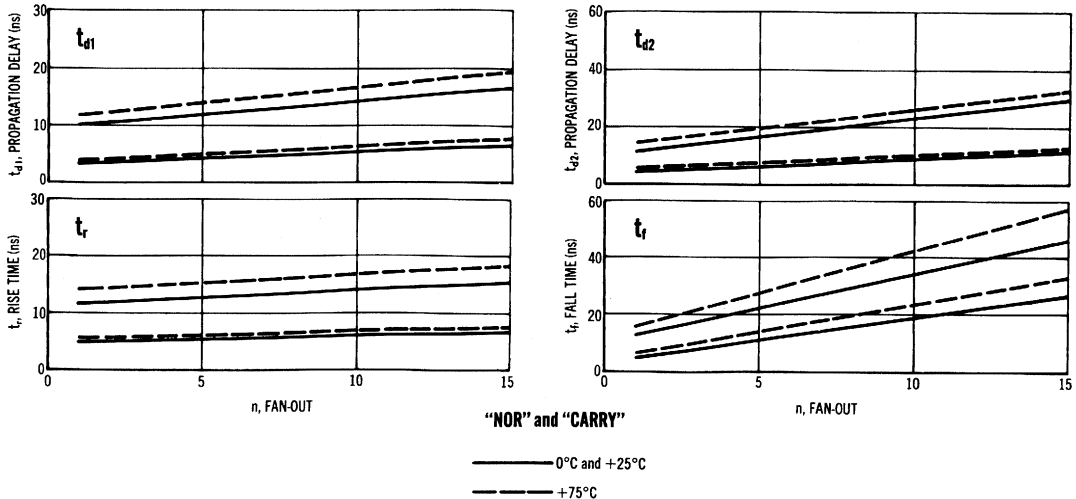


GATE EXPANDER

MECL MC350 series

MC355

A 5-input expander for use with the MC352A, MC356, MC357, and MC365. Each expander unit increases the fan-in of the basic gate by five.

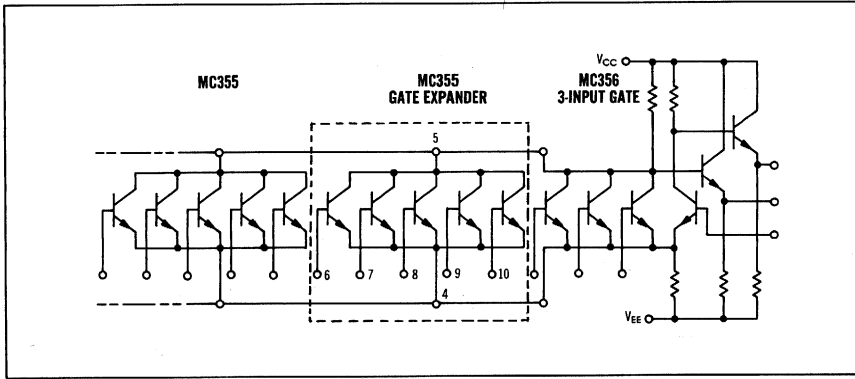


ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions						Ground Pin No	Symbol Pin No in ()	Test Limits						Unit
	Vdc ± 1%								0°C		+25°C		+75°C		
	V _{EE} Pin No	V _{BB} Pin No	V _{CC} Pin No	V _{CB} Pin No	V _{BE} Pin No	I _E Pin No			Min	Max	Min	Max	Min	Max	
Base Leakage Current	4	6	—	—	—	—	5	I _{BL} (6)	—	0.5	—	0.5	—	2.0	μAdc
	4	7	—	—	—	—	5	I _{BL} (7)	—	↓	—	↓	—	↓	↓
	4	8	—	—	—	—	5	I _{BL} (8)	—	↓	—	↓	—	↓	↓
	4	9	—	—	—	—	5	I _{BL} (9)	—	↓	—	↓	—	↓	↓
	4	10	—	—	—	—	5	I _{BL} (10)	—	↓	—	↓	—	↓	↓
Collector Leakage Current	—	—	5	—	6,7,8,9,10	—	4	I _{CLC} (5)	—	1.0	—	1.0	—	15.0	μAdc
Input Voltage	—	—	—	5	—	4	6	V _{BE} (4)	0.730	0.780	0.680	0.730	0.580	0.630	Vdc
	—	—	—	5	—	4	7	V _{BE} (4)	↓	↓	↓	↓	↓	↓	↓
	—	—	—	5	—	4	8	V _{BE} (4)	↓	↓	↓	↓	↓	↓	↓
	—	—	—	5	—	4	9	V _{BE} (4)	↓	↓	↓	↓	↓	↓	↓
	—	—	—	5	—	4	10	V _{BE} (4)	↓	↓	↓	↓	↓	↓	↓
Switching Times	Pulse In	Pulse Out	—	—	—	—	—	t _{su}	Typ	Max	Typ	Max	Typ	Max	ns
Propagation Delay Time	8	①	—	—	—	—	—	t _{pd}	4.5	9.5	4.5	9.5	5.5	13.0	↓
Rise Time	8	①	—	—	—	—	—	t _r	4.0	9.0	4.0	9.0	4.5	12.0	↓
Fall Time	8	①	—	—	—	—	—	t _f	8.5	13.0	8.5	13.0	9.0	15.0	↓
	8	①	—	—	—	—	—	t _r	3.5	10.5	3.5	10.5	4.0	11.5	↓

Pins not listed are left open. ① See Switching Time Test Circuit.

SWITCHING TIME TEST CIRCUIT

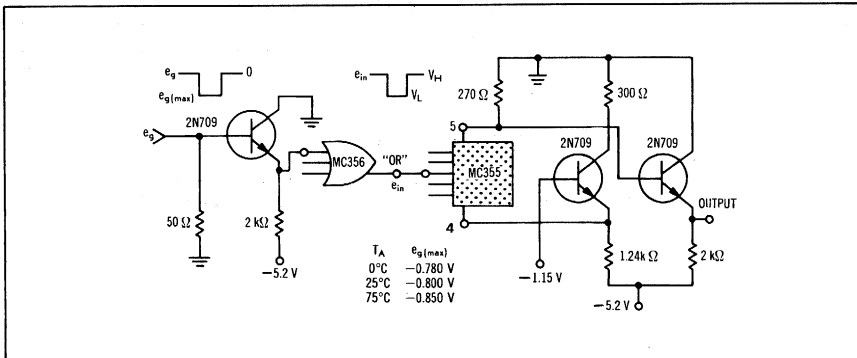


BIAS DRIVER

MECL MC350 series

MC354

Bias driver that compensates for changes in circuit parameters with temperature.

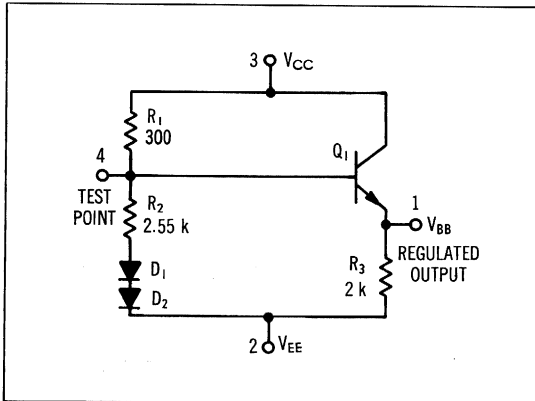

ELECTRICAL CHARACTERISTICS

Characteristic	V_{EE} Pin No	I_L Pin No	Ground Pin No	Symbol Pin No in ()	Test Limits						Unit
					0°C		+25°C		+75°C		
					Min	Max	Min	Max	Min	Max	
Power Supply Drain Current	2	—	3	$I_E (2)$	—	4.6	—	4.4	—	4.0	mAdc
Output Voltage	2	1 ①	3	V_{BB}	-1.14	-1.27	-1.09	-1.22	-1.04	-1.18	Vdc

Pins not listed are left open.

① Current test conditions: no load = 0; full load = -2.5 mAdc \pm 5%.

CIRCUIT DESCRIPTION

Circuit Operation:

The divider network R_1 , R_2 , D_1 , D_2 compensates for temperature variations of the base-emitter voltages of Q_1 , and of the driven gates, producing a bias voltage for the MECL logic circuits that maintains a constant set of dc operating conditions over the temperature range of 0 to +75°C. In addition, compensation for power supply variations is achieved, since the bias output voltage is derived from the system supply.

Either of the supply voltage nodes may be used as ground, however the ground potential of the bias driver must coincide with that of the logic system. Thus, if V_{CC} is grounded in the logic system, then —

$$V_{CC} = 0; \quad V_{EE} = -5.2 \text{ V};$$



$$V_{BB} = -1.15 \text{ nominal output voltage at } 25^\circ\text{C}$$

LINE DRIVER

MECL MC350 series

MC365

Line driver for driving lines of 50 ohms or greater while providing the positive logic "NOR" function and its complement simultaneously.

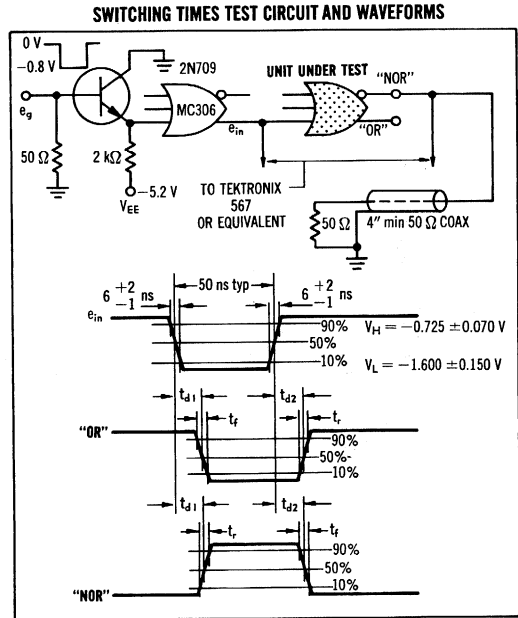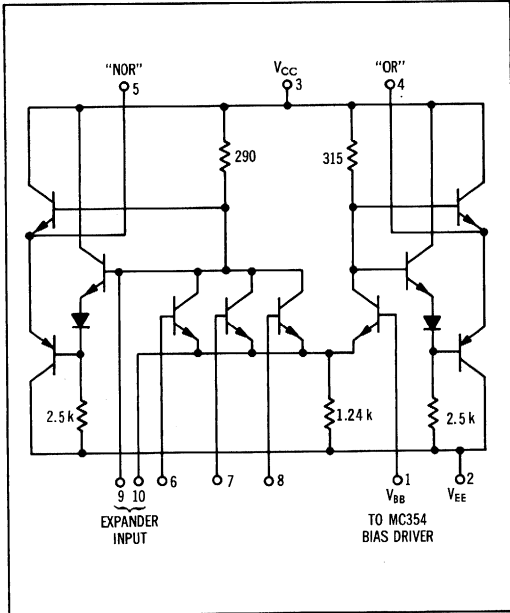

ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions V _{dc} ± 1%						Symbol Pin No in ()	Ground Pin No	Test Limits						Unit
	0°C		+25°C		+75°C				0°C		+25°C		+75°C		
	Min	Max	Min	Max	Min	Max			Min	Max	Min	Max	Min	Max	
Power Supply Drain Current	—	—	—	2,6,7,8	1	4,5	3	I _E (2)	—	68	—	65	—	63	mAdc
Input Current	6	—	—	2,7,8	1	—	3	I _{in} (6)	—	—	—	100	—	—	—
	7	—	—	2,6,8	1	—	3	I _{in} (7)	—	—	—	—	—	—	—
	8	—	—	2,6,7	1	—	3	I _{in} (8)	—	—	—	—	—	—	—
"NOR" Logical "1" Output Voltage	—	—	6	2,7,8	1	4,5	3	V ₁ (6)	-0.695	-0.850	-0.650	-0.795	-0.570	-0.725	Vdc
	—	—	7	2,6,8	1	4,5	3	V ₁ (7)	—	—	—	—	—	—	—
	—	—	8	2,6,7	1	4,5	3	V ₁ (8)	—	—	—	—	—	—	—
"NOR" Logical "0" Output Voltage	—	6	—	2,7,8	1	4,5	3	V ₄ (6)	-1.495	-1.880	-1.450	-1.750	-1.395	-1.730	Vdc
	—	7	—	2,6,8	1	4,5	3	V ₄ (7)	—	—	—	—	—	—	—
	—	8	—	2,6,7	1	4,5	3	V ₄ (8)	—	—	—	—	—	—	—
"OR" Logical "1" Output Voltage	—	6	—	2,7,8	1	4,5	3	V ₂ (6)	-0.695	-0.850	-0.650	-0.795	-0.570	-0.725	Vdc
	—	7	—	2,6,8	1	4,5	3	V ₂ (7)	—	—	—	—	—	—	—
	—	8	—	2,6,7	1	4,5	3	V ₂ (8)	—	—	—	—	—	—	—
"OR" Logical "0" Output Voltage	—	6	—	2,7,8	1	4,5	3	V ₅ (6)	-1.495	-1.880	-1.450	-1.750	-1.395	-1.730	Vdc
	—	7	—	2,6,8	1	4,5	3	V ₅ (7)	—	—	—	—	—	—	—
	—	8	—	2,6,7	1	4,5	3	V ₅ (8)	—	—	—	—	—	—	—
Switching Times	Pulse In	Pulse Out	—	2,7,8	1	—	3	t _{er} (5)	Typ	Max	Typ	Max	Typ	Max	ns
	—	—	—	2,7,8	1	—	3	t _{er} (4)	12.0	20.0	12.0	20.0	13.5	25.0	
-Propagation Delay Time	6	5	—	2,7,8	1	—	3	t _{er} (4)	16.0	25.0	16.0	25.0	18.5	30.0	
	6	5	—	2,7,8	1	—	3	t _{dr} (5)	14.0	25.0	14.0	25.0	16.0	30.0	
	6	4	—	2,7,8	1	—	3	t _{dr} (4)	10.0	20.0	10.0	20.0	11.0	23.0	
	6	4	—	2,7,8	1	—	3	t _{dr} (4)	10.0	20.0	10.0	20.0	11.0	23.0	
Rise Time	6	5	—	2,7,8	1	—	3	t _r (5)	16.5	25.0	16.0	25.0	19.0	30.0	
	6	4	—	2,7,8	1	—	3	t _r (4)	13.0	20.0	13.0	20.0	15.5	25.0	
Fall Time	6	5	—	2,7,8	1	—	3	t _f (5)	20.5	35.0	20.5	35.0	26.0	47.0	
	6	4	—	2,7,8	1	—	3	t _f (4)	20.0	35.0	20.0	35.0	23.0	47.0	


Pins not listed are left open. ① Output is loaded with a 50-ohm resistor.

**DUAL 2-INPUT CLOCK DRIVER
AND HIGH-SPEED GATE**


MECL MC350 series

MC369G


High-speed clock driver or dual 2-input gate that provides the positive logic "NOR" function and its complement simultaneously.

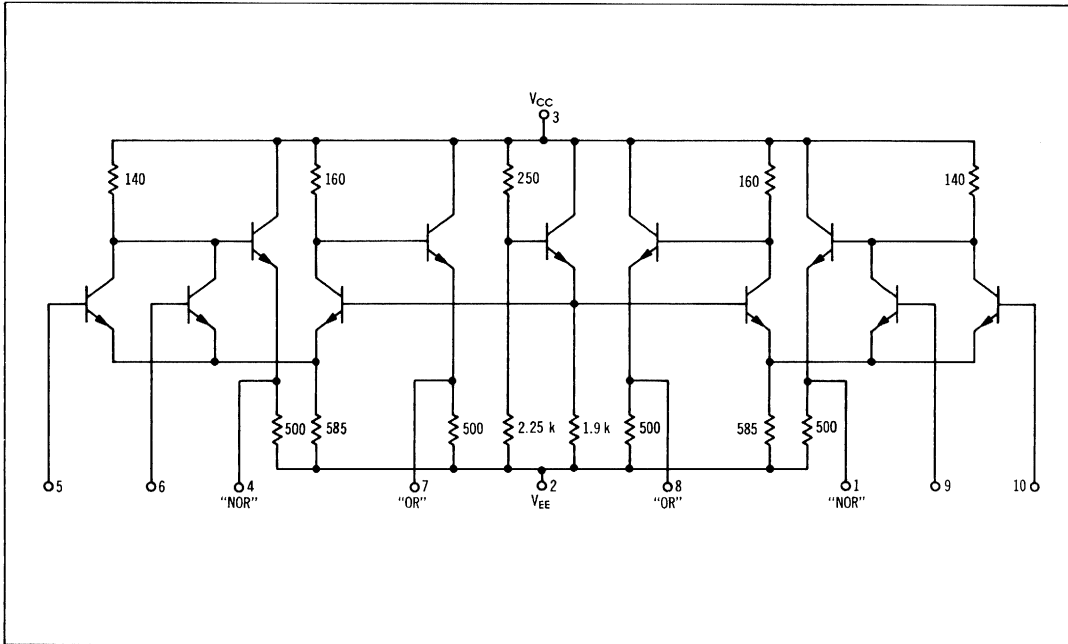


SWITCHING TIME TEST CIRCUIT

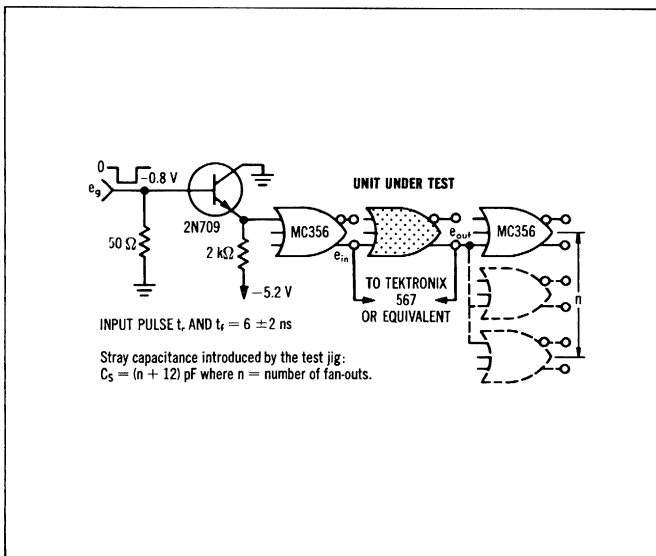

PROPAGATION DELAY



RISE AND FALL TIME



ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions				dV _{in} Pin No	I _L Pin No	Ground Pin No	Symbol Pin No in ()	Test Limits						Unit
	V _{dc} ± 1%								0°C		+25°C		+75°C		
	V _H Pin No	V _{I max} Pin No	V _L Pin No	V _{EE} Pin No					Min	Max	Min	Max	Min	Max	
@ Test Temperature { 0°C — — — — +25°C — -0.670 -0.795 -1.465 -5.20 +75°C — -0.725 -1.395 -5.20															
Power Supply Drain Current	—	—	—	2,5,6,9,10	—	—	3	I _E (2)	—	—	—	60	—	—	mAdc
Input Current	5	—	—	2,6,9,10	—	—	3	I _{in} (5)	—	—	—	200	—	—	μAdc ↓
	6	—	—	2,5,9,10	—	—	3	I _{in} (6)	—	—	—	—	—	—	
	9	—	—	2,5,6,10	—	—	3	I _{in} (9)	—	—	—	—	—	—	
	10	—	—	2,5,6,9	—	—	3	I _{in} (10)	—	—	—	—	—	—	
"NOR" Logical "1" Output Voltage	—	—	5	2,6,9,10	—	—	3	V _I (4)	-0.700	-0.900	-0.650	-0.825	-0.550	-0.770	Vdc ↓
	—	—	6	2,5,9,10	—	—	3	V _I (4)	↓	↓	↓	↓	↓	↓	
	—	—	9	2,5,6,10	—	—	3	V _I (1)	↓	↓	↓	↓	↓	↓	
	—	—	10	2,5,6,9	—	—	3	V _I (1)	↓	↓	↓	↓	↓	↓	
"NOR" Logical "0" Output Voltage	—	5	—	2,6,9,10	—	—	3	V _A (4)	-1.510	-1.880	-1.465	-1.850	-1.395	-1.790	Vdc ↓
	—	6	—	2,5,9,10	—	—	3	V _A (4)	↓	↓	↓	↓	↓	↓	
	—	9	—	2,5,6,10	—	—	3	V _A (1)	↓	↓	↓	↓	↓	↓	
	—	10	—	2,5,6,9	—	—	3	V _A (1)	↓	↓	↓	↓	↓	↓	
"OR" Logical "1" Output Voltage	—	5	—	2,6,9,10	—	—	3	V _S (7)	-0.700	-0.900	-0.650	-0.825	-0.550	-0.770	Vdc ↓
	—	6	—	2,5,9,10	—	—	3	V _S (7)	↓	↓	↓	↓	↓	↓	
	—	9	—	2,5,6,10	—	—	3	V _S (8)	↓	↓	↓	↓	↓	↓	
	—	10	—	2,5,6,9	—	—	3	V _S (8)	↓	↓	↓	↓	↓	↓	
"OR" Logical "0" Output Voltage	—	—	5	2,6,9,10	—	—	3	V _Z (7)	-1.510	-1.880	-1.465	-1.850	-1.395	-1.790	Vdc ↓
	—	—	6	2,5,9,10	—	—	3	V _Z (7)	↓	↓	↓	↓	↓	↓	
	—	—	9	2,5,6,10	—	—	3	V _Z (8)	↓	↓	↓	↓	↓	↓	
	—	—	10	2,5,6,9	—	—	3	V _Z (8)	↓	↓	↓	↓	↓	↓	
"NOR" Output Voltage Change	—	—	5	2,6,9,10	—	4⊕	3	ΔV _I (4)	—	-0.100	—	-0.100	—	-0.130	Volts Volts
	—	—	9	2,5,6,10	—	1⊕	3	ΔV _I (1)	—	-0.100	—	-0.100	—	-0.130	
"OR" Output Voltage Change	—	5	—	2,6,9,10	—	7⊕	3	ΔV _S (7)	—	-0.100	—	-0.100	—	-0.130	Volts Volts
	—	9	—	2,5,6,10	—	8⊕	3	ΔV _S (8)	—	-0.100	—	-0.100	—	-0.130	
"NOR" Saturation Breakpoint Voltage	—	—	—	2,6,9,10	5⊕	—	3	V _S (4)	—	—	—	-0.55	—	-0.63	Vdc ↓
	—	—	—	2,5,9,10	6⊕	—	3	V _S (4)	—	—	—	—	—	—	
	—	—	—	2,5,6,10	9⊕	—	3	V _S (1)	—	—	—	—	—	—	
	—	—	—	2,5,6,9	10⊕	—	3	V _S (1)	—	—	—	—	—	—	
Switching Times	Pulse In	Pulse Out							Typ	Max	Typ	Max	Typ	Max	ns ↓
Propagation Delay Time															
Fan-Out = 1	5	4	—	2,6,9,10	—	—	3	t _{di} (4)	3	5	3	5	4	6	
	5	7	—	2,6,9,10	—	—	3	t _{di} (7)	↓	6	↓	6	↓	7	
	9	1	—	2,5,6,10	—	—	3	t _{di} (1)	↓	5	↓	5	↓	6	
	9	8	—	2,5,6,10	—	—	3	t _{di} (8)	↓	6	↓	6	↓	7	
	5	4	—	2,6,9,10	—	—	3	t _{dz} (4)	3	6	3	6	4	7	
	5	7	—	2,6,9,10	—	—	3	t _{dz} (7)	↓	5	↓	5	↓	6	
	9	1	—	2,5,6,10	—	—	3	t _{dz} (1)	↓	6	↓	6	↓	7	
	9	8	—	2,5,6,10	—	—	3	t _{dz} (8)	↓	5	↓	5	↓	6	
Fan-Out = 10	5	4	—	2,6,9,10	—	—	3	t _{di} (4)	4	7	4	7	5	8	
	5	7	—	2,6,9,10	—	—	3	t _{di} (7)	5	10	5	10	6	11	
	9	1	—	2,5,6,10	—	—	3	t _{di} (1)	4	7	4	7	5	8	
	9	8	—	2,5,6,10	—	—	3	t _{di} (8)	5	10	5	10	6	11	
	5	4	—	2,6,9,10	—	—	3	t _{dz} (4)	5	10	5	10	6	11	
	5	7	—	2,6,9,10	—	—	3	t _{dz} (7)	4	7	4	7	5	8	
	9	1	—	2,5,6,10	—	—	3	t _{dz} (1)	5	10	5	10	6	11	
	9	8	—	2,5,6,10	—	—	3	t _{dz} (8)	4	7	4	7	5	8	
Rise Time, Fan-Out = 1	5	4	—	2,6,9,10	—	—	3	t _r (4)	4	7	4	7	5	9	
	5	7	—	2,6,9,10	—	—	3	t _r (7)	↓	6	↓	6	↓	8	
	9	1	—	2,5,6,10	—	—	3	t _r (1)	↓	7	↓	7	↓	9	
	9	8	—	2,5,6,10	—	—	3	t _r (8)	↓	6	↓	6	↓	8	
	5	4	—	2,6,9,10	—	—	3	t _r (4)	4	9	4	9	5	10	
	5	7	—	2,6,9,10	—	—	3	t _r (7)	↓	↓	↓	↓	↓	↓	
	9	1	—	2,5,6,10	—	—	3	t _r (1)	↓	↓	↓	↓	↓	↓	
	9	8	—	2,5,6,10	—	—	3	t _r (8)	↓	↓	↓	↓	↓	↓	
Fall Time, Fan-Out = 1	5	4	—	2,6,9,10	—	—	3	t _f (4)	4	6	4	6	5	7	
	5	7	—	2,6,9,10	—	—	3	t _f (7)	↓	↓	↓	↓	↓	↓	
	9	1	—	2,5,6,10	—	—	3	t _f (1)	↓	↓	↓	↓	↓	↓	
	9	8	—	2,5,6,10	—	—	3	t _f (8)	↓	↓	↓	↓	↓	↓	
	5	4	—	2,6,9,10	—	—	3	t _f (4)	6	11	6	11	7	12	
	5	7	—	2,6,9,10	—	—	3	t _f (7)	↓	↓	↓	↓	↓	↓	
	9	1	—	2,5,6,10	—	—	3	t _f (1)	↓	↓	↓	↓	↓	↓	
	9	8	—	2,5,6,10	—	—	3	t _f (8)	↓	↓	↓	↓	↓	↓	


Pins not listed are left open. ⊕ Input voltage is adjusted to obtain dV "NOR" / dV_{in} = 0. ⊙ Current test conditions: no load = 0; full load = -10 mAdc ± 5%.

**DUAL 4-INPUT CLOCK DRIVER
AND HIGH-SPEED GATE**


MECL MC 350 series

MC369F



High-speed clock driver or dual 4-input gate that provides the positive logic "NOR" function and its complement simultaneously.

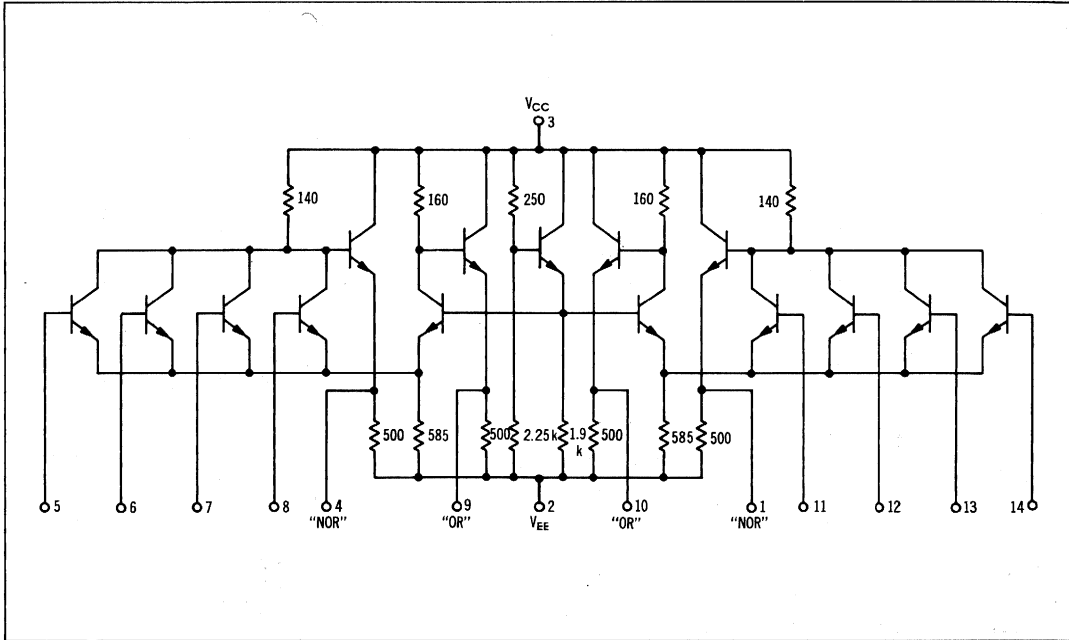


SWITCHING TIME TEST CIRCUIT

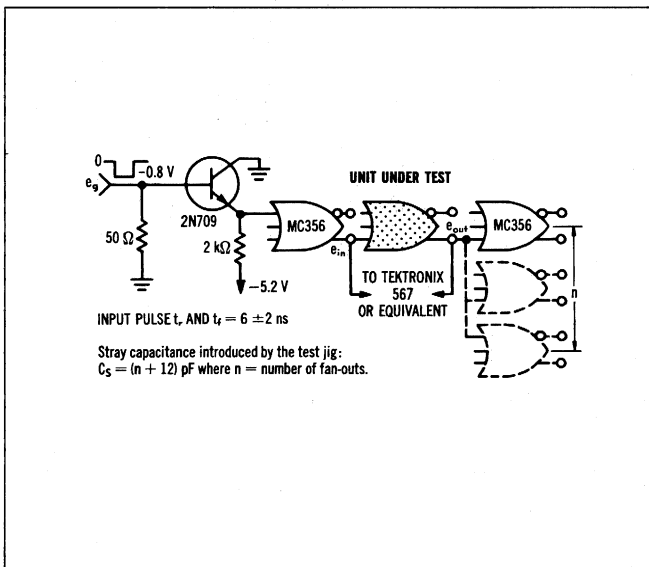

PROPAGATION DELAY



RISE AND FALL TIME



MC369F (continued)

ELECTRICAL CHARACTERISTICS

Characteristic	Test Conditions V _{dc} ± 1%				dV _{in} Pin No	I _L Pin No	Ground Pin No	Symbol Pin No in ()	Test Limits						Unit			
	@ Test Temperature								0°C		+25°C		+75°C					
	V _H Pin No	V _{I,max} Pin No	V _L Pin No	V _{EE} Pin No					Min	Max	Min	Max	Min	Max				
Power Supply Drain Current	—	—	—	2,5,6,7,8,11,12,13,14	—	—	3	I _e (2)	—	—	—	—	—	—	mAdc			
Input Current	5	—	—	2,6,7,8,11,12,13,14	—	—	3	I _{in} (5)	—	—	—	200	—	—	μAdc			
	6	—	—	2,5,6,7,8,11,12,13,14	—	—	3	I _{in} (6)	—	—	—	—	—	↓				
	7	—	—	2,5,6,8,11,12,13,14	—	—	3	I _{in} (7)	—	—	—	—	—					
	8	—	—	2,5,6,7,11,12,13,14	—	—	3	I _{in} (8)	—	—	—	—	—					
	11	—	—	2,5,6,7,8,12,13,14	—	—	3	I _{in} (11)	—	—	—	—	—					
	12	—	—	2,5,6,7,8,11,13,14	—	—	3	I _{in} (12)	—	—	—	—	—					
"NOR" Logical "1" Output Voltage	—	—	5	2,6,7,8,11,12,13,14	—	—	3	V ₁ (4)	-0.700	-0.900	-0.650	-0.825	-0.550		-0.770	Vdc		
	—	—	6	2,5,7,8,11,12,13,14	—	—	3	V ₁ (4)	↓	↓	↓	↓	↓					
	—	—	7	2,5,6,8,11,12,13,14	—	—	3	V ₁ (4)	↓	↓	↓	↓	↓					
	—	—	8	2,5,6,7,11,12,13,14	—	—	3	V ₁ (4)	↓	↓	↓	↓	↓					
	—	—	11	2,5,6,7,8,12,13,14	—	—	3	V ₁ (1)	↓	↓	↓	↓	↓					
	—	—	12	2,5,6,7,8,11,13,14	—	—	3	V ₁ (1)	↓	↓	↓	↓	↓					
"NOR" Logical "0" Output Voltage	—	—	5	2,6,7,8,11,12,13,14	—	—	3	V ₄ (4)	-1.510	-1.880	-1.465	-1.850	-1.395	-1.790	Vdc			
	—	—	6	2,5,7,8,11,12,13,14	—	—	3	V ₄ (4)	↓	↓	↓	↓	↓					
	—	—	7	2,5,6,8,11,12,13,14	—	—	3	V ₄ (4)	↓	↓	↓	↓	↓					
	—	—	8	2,5,6,7,11,12,13,14	—	—	3	V ₄ (4)	↓	↓	↓	↓	↓					
	—	—	11	2,5,6,7,8,12,13,14	—	—	3	V ₄ (1)	↓	↓	↓	↓	↓					
	—	—	12	2,5,6,7,8,11,13,14	—	—	3	V ₄ (1)	↓	↓	↓	↓	↓					
"OR" Logical "1" Output Voltage	—	—	5	2,6,7,8,11,12,13,14	—	—	3	V ₅ (9)	-0.700	-0.900	-0.650	-0.825	-0.550	-0.770	Vdc			
	—	—	6	2,5,7,8,11,12,13,14	—	—	3	V ₅ (9)	↓	↓	↓	↓	↓					
	—	—	7	2,5,6,8,11,12,13,14	—	—	3	V ₅ (9)	↓	↓	↓	↓	↓					
	—	—	8	2,5,6,7,11,12,13,14	—	—	3	V ₅ (9)	↓	↓	↓	↓	↓					
	—	—	11	2,5,6,7,8,12,13,14	—	—	3	V ₅ (10)	↓	↓	↓	↓	↓					
	—	—	12	2,5,6,7,8,11,13,14	—	—	3	V ₅ (10)	↓	↓	↓	↓	↓					
"OR" Logical "0" Output Voltage	—	—	5	2,6,7,8,11,12,13,14	—	—	3	V ₂ (9)	-1.510	-1.880	-1.465	-1.850	-1.395	-1.790	Vdc			
	—	—	6	2,5,7,8,11,12,13,14	—	—	3	V ₂ (9)	↓	↓	↓	↓	↓					
	—	—	7	2,5,6,8,11,12,13,14	—	—	3	V ₂ (9)	↓	↓	↓	↓	↓					
	—	—	8	2,5,6,7,11,12,13,14	—	—	3	V ₂ (9)	↓	↓	↓	↓	↓					
	—	—	11	2,5,6,7,8,12,13,14	—	—	3	V ₂ (10)	↓	↓	↓	↓	↓					
	—	—	12	2,5,6,7,8,11,13,14	—	—	3	V ₂ (10)	↓	↓	↓	↓	↓					
"NOR" Output Voltage Change	—	—	5	2,6,7,8,11,12,13,14	—	4 ⊕	3	ΔV ₁ (4)	—	-0.100	—	-0.100	—	-0.130	Volts			
	—	—	11	2,5,6,7,8,12,13,14	—	1 ⊕	3	ΔV ₁ (1)	—	-0.100	—	-0.100	—	-0.130				
"OR" Output Voltage Change	—	—	5	2,6,7,8,11,12,13,14	—	9 ⊕	3	ΔV ₅ (9)	—	-0.100	—	-0.100	—	-0.130	Volts			
	—	—	11	2,5,6,7,8,12,13,14	—	10 ⊕	3	ΔV ₅ (10)	—	-0.100	—	-0.100	—	-0.130				
"NOR" Saturation Breakpoint Voltage	—	—	—	2,6,7,8,11,12,13,14	5 ⊕	—	3	V ₃ (5)	—	-0.51	—	-0.55	—	-0.63	Vdc			
	—	—	—	2,5,7,8,11,12,13,14	6 ⊕	—	3	V ₃ (6)	—	—	—	—	—					
	—	—	—	2,5,6,8,11,12,13,14	7 ⊕	—	3	V ₃ (7)	—	—	—	—	—					
	—	—	—	2,5,6,7,11,12,13,14	8 ⊕	—	3	V ₃ (8)	—	—	—	—	—					
	—	—	—	2,5,6,7,8,12,13,14	11 ⊕	—	3	V ₃ (11)	—	—	—	—	—					
	—	—	—	2,5,6,7,8,11,13,14	12 ⊕	—	3	V ₃ (12)	—	—	—	—	—					
	—	—	—	2,5,6,7,8,11,12,14	13 ⊕	—	3	V ₃ (13)	—	—	—	—	—					
	—	—	—	2,5,6,7,8,11,12,13	14 ⊕	—	3	V ₃ (14)	—	—	—	—	—					
	Switching Times	Propagation Delay Time	Pulse In	Pulse Out	—	—	—	3	t _{pd} (4)	Typ	Max	Typ	Max	Typ		Max	ns	
										3	5	3	5	4		6		
		Fan-Out = 1	5	4	—	2,6,7,8,11,12,13,14	—	—	3	t _{pd} (9)	5	6	5	6		4		7
			11	1	—	2,5,6,7,8,12,13,14	—	—	3	t _{pd} (1)	5	5	5	5		6		7
			11	10	—	2,5,6,7,8,12,13,14	—	—	3	t _{pd} (10)	6	6	6	6		7		7
			5	4	—	2,6,7,8,11,12,13,14	—	—	3	t _{pd} (4)	3	6	3	6		4		7
5			9	—	2,6,7,8,11,12,13,14	—	—	3	t _{pd} (9)	5	5	5	5	6	7			
11			10	—	2,5,6,7,8,12,13,14	—	—	3	t _{pd} (10)	6	6	6	6	7	7			
Fan-Out = 10		5	4	—	2,6,7,8,11,12,13,14	—	—	3	t _{pd} (4)	4	7	4	7	5	8			
		5	9	—	2,6,7,8,11,12,13,14	—	—	3	t _{pd} (9)	5	10	5	10	6	11			
		11	1	—	2,5,6,7,8,12,13,14	—	—	3	t _{pd} (1)	4	7	4	7	5	8			
		11	10	—	2,5,6,7,8,12,13,14	—	—	3	t _{pd} (10)	5	10	5	10	6	11			
		5	4	—	2,6,7,8,11,12,13,14	—	—	3	t _{pd} (4)	5	10	5	10	6	11			
		5	9	—	2,6,7,8,11,12,13,14	—	—	3	t _{pd} (9)	4	7	4	7	5	8			
Rise Time, Fan-Out = 1		5	4	—	2,6,7,8,11,12,13,14	—	—	3	t _r (4)	4	7	4	7	5	9			
		5	9	—	2,6,7,8,11,12,13,14	—	—	3	t _r (9)	6	6	6	6	8	8			
		11	1	—	2,5,6,7,8,12,13,14	—	—	3	t _r (1)	7	7	7	7	8	8			
		11	10	—	2,5,6,7,8,12,13,14	—	—	3	t _r (10)	6	6	6	6	7	7			
		5	4	—	2,6,7,8,11,12,13,14	—	—	3	t _r (4)	4	9	4	9	5	10			
		5	9	—	2,6,7,8,11,12,13,14	—	—	3	t _r (9)	4	7	4	7	5	8			
Fall Time, Fan-Out = 1		5	4	—	2,6,7,8,11,12,13,14	—	—	3	t _f (4)	4	6	4	6	5	7			
		5	9	—	2,6,7,8,11,12,13,14	—	—	3	t _f (9)	4	6	4	6	5	7			
		11	1	—	2,5,6,7,8,12,13,14	—	—	3	t _f (1)	4	6	4	6	5	7			
		11	10	—	2,5,6,7,8,12,13,14	—	—	3	t _f (10)	4	6	4	6	5	7			
	5	4	—	2,6,7,8,11,12,13,14	—	—	3	t _f (4)	6	11	6	11	7	12				
	5	9	—	2,6,7,8,11,12,13,14	—	—	3	t _f (9)	6	11	6	11	7	12				


Pins not listed are left open. ⊕ Input voltage is adjusted to obtain dV "NOR" / dV_{in} = 0. ⊙ Current test conditions: no load = 0; full load = -10 mAdc ± 5%.

MECL-TO-SATURATED TRANSLATOR


MECL MC350 series

MC367

Level translator intended for converting non-saturated MECL signal levels to saturated logic levels; provides "OR" or "NOR" logic depending on the bias arrangement used.

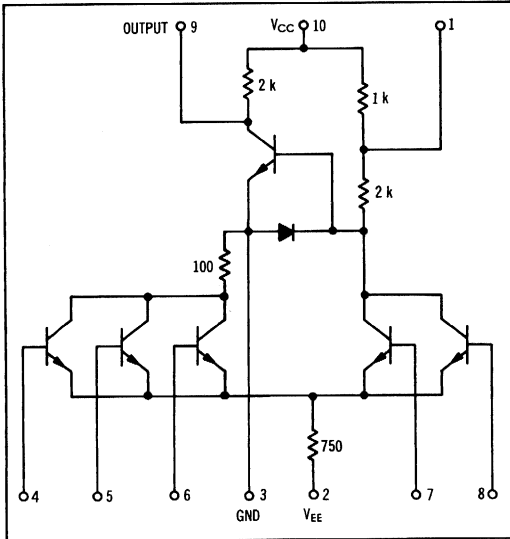

SWITCHING TEST CIRCUIT AND WAVEFORMS

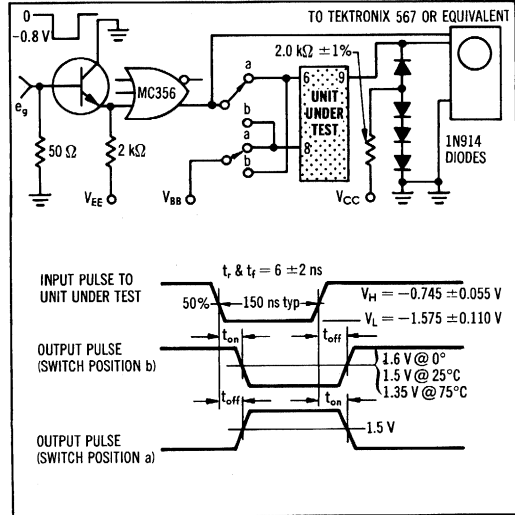

ELECTRICAL CHARACTERISTICS


Characteristic	Test Conditions							Ground Pin No	Symbol Pin No in ()	Test Limits						Unit
	Vdc ± 1%									0°C		+25°C		+75°C		
	V _H Pin No	V _{I max} Pin No	V _L Pin No	V _{EE} Pin No	V _{BB} Pin No	V _{CC} Pin No	I _L Pin No			Min	Max	Min	Max	Min	Max	
Power Supply Drain Current	—	6	—	2,4,5,7 2,4,5,6,7	8 8	10 10	—	3 3	I _C (10) I _E (2)	— 7.3	7.3 —	7.0 7.0	— —	6.8 6.8	mAdc mAdc	
Input Current	4 5 6 7 8	— — — — —	— — — — —	2,5,6,7 2,4,6,7 2,4,5,7 2,4,5,8 2,4,5,7	8 8 8 6 6	10 10 10 10 10	— — — — —	3 3 3 3 3	I _{in} (4) I _{in} (5) I _{in} (6) I _{in} (7) I _{in} (8)	— — — — —	— — — — —	200 — — — —	— — — — —	— — — — —	μAdc — — — —	
Output Voltage, High	—	—	—	2,4,5,6,7 2,4,5,6,8	8 7	10 10	—	3 3	V _{OH} (9) V _{OH} (9)	— —	— —	5.8 5.8	— —	— —	Vdc Vdc	
Output Voltage, Low	—	4 5 6	—	2,5,6,7 2,4,6,7 2,4,5,7 2,4,5,8	8 8 8 7	10 10 10 10	9 9 9 9	3 3 3 3	V _{OL} (9) V _{OL} (9) V _{OL} (9) V _{OL} (9)	— — — —	0.45 — — —	— — — —	0.45 — — —	0.50 — — —	Vdc — — —	
Switching Times	Pulse In	Pulse Out	—	—	—	—	—	—	—	Typ	Max	Typ	Max	Typ	Max	ns
Turn-On Time	6 8	9 9	— —	2,4,5,7 2,4,5,7	8 6	10 10	— —	3 3	t _{on} (9) t _{on} (9)	27.5 27.5	40.0 40.0	27.5 40.0	40.0 29.5	29.5 43.0	43.0 —	ns —
Turn-Off Time	6 8	9 9	— —	2,4,5,7 2,4,5,7	8 6	10 10	— —	3 3	t _{off} (9) t _{off} (9)	25.0 25.0	40.0 40.0	26.0 40.0	40.0 27.0	43.0 43.0	— —	— —

**SATURATED LOGIC-TO-MECL
TRANSLATOR**


MECL MC350 series

MC368

Level translator intended for converting saturated logic levels to non-saturated MECL signal levels.

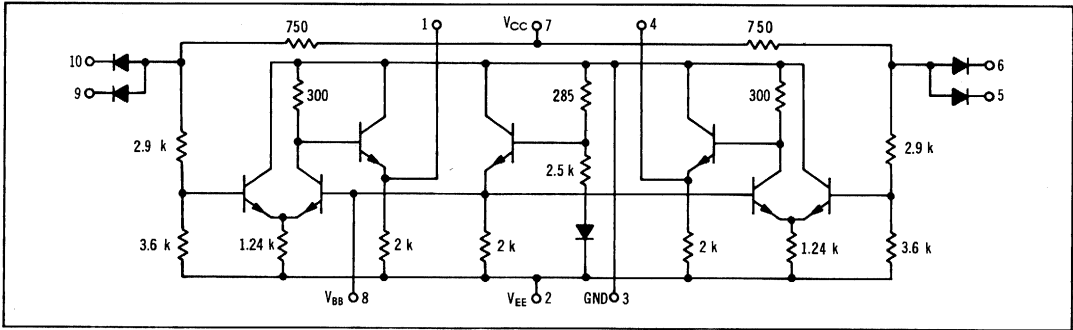

SWITCHING CHARACTERISTICS AND WAVEFORMS

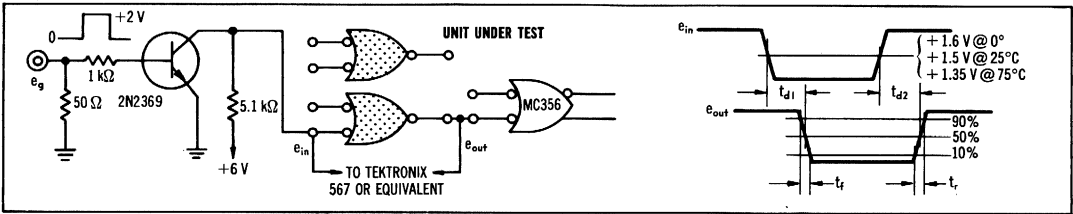


ELECTRICAL CHARACTERISTICS

@ Test Temperature	Test Conditions			
	Vdc ± 1%			
	0°C	+5.0	-5.20	+6.0
	+25°C	+5.0	-5.20	+6.0
+75°C	+5.0	-5.20	+6.0	


Characteristic	V _{IL} Pin No	V _{IH} Pin No	V _{EE} Pin No	V _{CC} Pin No	Ground Pin No	Symbol Pin No in ()	Test Limits						Unit
							0°C		+25°C		+75°C		
							Min	Max	Min	Max	Min	Max	
Power Supply Drain Current	—	—	2	7	3	I _c (7) I _e (2)	—	4.2	—	4.0	—	3.9	mAdc
Input Load Current	—	—	2	7	3,5 3,6 3,9 3,10	I _L (5) I _L (6) I _L (9) I _L (10)	—	—	—	8.5	—	—	mAdc
Input Reverse Current	—	—	2	5,7 6,7 7,9 7,10	3,6 3,5 3,10 3,9	I _x (5) I _x (6) I _x (9) I _x (10)	—	—	—	0.5	—	2.0	μAdc
"OR" Logical "1" Output Voltage	—	5 6 9 10	2 2 2 2	7 7 7 7	3 3 3 3	V _o (4) V _o (4) V _o (1) V _o (1)	-0.715	-0.850	-0.670	-0.795	-0.570	-0.725	Vdc
"OR" Logical "0" Output Voltage	5 6 9 10	—	2 2 2 2	7 7 7 7	3 3 3 3	V _o (4) V _o (4) V _o (1) V _o (1)	-1.510	-1.880	-1.450	-1.750	-1.395	-1.730	Vdc
Bias Voltage Output	—	—	2	7	3	V _{BB} (8)	-1.14	-1.27	-1.09	-1.22	-1.04	-1.18	Vdc
Switching Times	Pulse In	Pulse Out					Typ	Max	Typ	Max	Typ	Max	
Propagation Delay Time	5	4	2	7	3	t _{pd} (4)	14.5	24.0	15.0	24.0	19.0	28.0	ns
	9	1	2	7	3	t _{pd} (1)	14.5	24.0	15.0	24.0	19.0	28.0	
Rise Time	5	4	2	7	3	t _r (4)	15.5	23.0	15.5	23.0	19.0	28.0	
	9	1	2	7	3	t _r (1)	15.5	23.0	15.5	23.0	19.0	28.0	
Fall Time	5	4	2	7	3	t _f (4)	6.5	13.0	7.0	13.0	8.0	14.0	
	9	1	2	7	3	t _f (1)	6.5	13.0	7.0	13.0	8.0	14.0	
	5	4	2	7	3	t _r (4)	7.0	13.0	7.5	13.0	8.0	14.0	
	9	1	2	7	3	t _r (1)	7.0	13.0	7.5	13.0	8.0	14.0	

Pins not listed are left open.

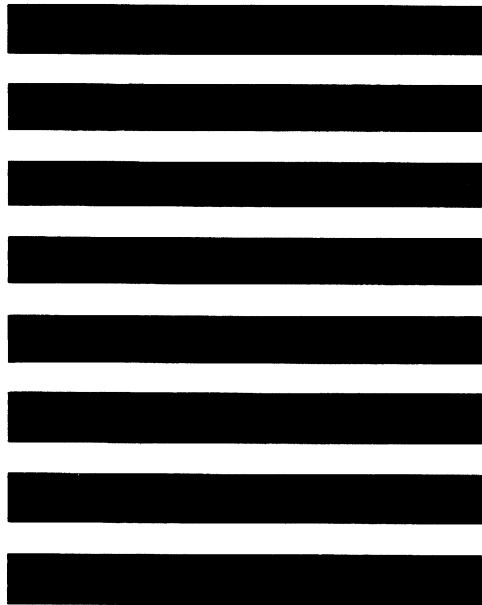

MECLII

**INTEGRATED CIRCUITS
MC1000/MC1200 SERIES**

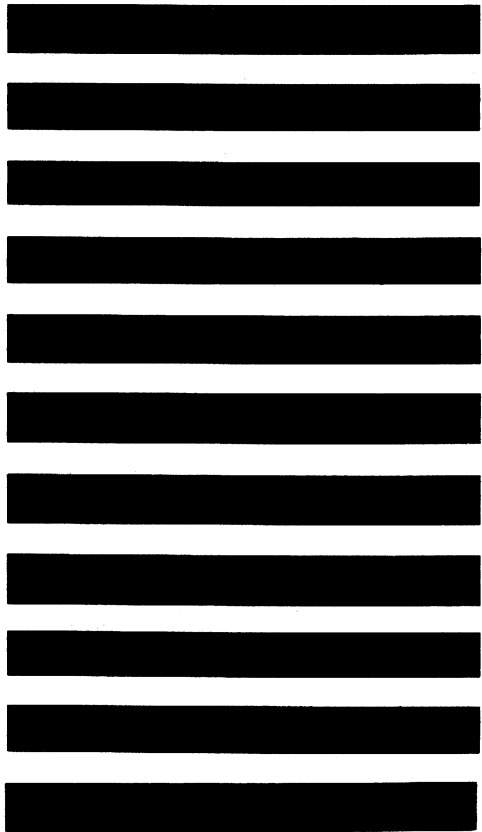

MECL II

INTEGRATED CIRCUITS

INDEX

	Page No.
Numerical Index	2-73
Loading Diagram Summary of Devices Available	2-74
General Information	2-78
MECL II Design Philosophy	2-78
System Characteristics	2-79
General Design and System Layout Rules	2-80
ORing Features	2-80
Unused Inputs	2-80
Fan-In	2-81
V _{BB} Supply	2-81
System Layout	2-81
Clock Distribution	2-81
Definitions	2-81
The Basic MECL II Logic Gate	2-82
Circuit Operation	2-82
Noise Margin	2-83
Power Supply Connections	2-83
DC Loading Considerations	2-84
AC Loading Considerations	2-84
Switching Times	2-85
Thermal Characteristics	2-86
Maximum Ratings	2-87
Packaging	2-88
 DEVICE SPECIFICATIONS	
GATES AND EXPANDERS	
	Page No.
MC1001-1003, MC1201-1203	6-Input OR/NOR Gates 2-89
MC1024, MC1224	Expandable Dual 2-Input OR/NOR Gates 2-93
MC1025, MC1225	Dual 4-5 Input Expanders 2-97
MC1004-1006, MC1204-1206	Dual 4-Input OR/NOR Gates 2-99
MC1007-1009, MC1207-1209	Triple 3-Input NOR Gates 2-103
MC1010-1012, MC1210-1212	Quad 2-Input NOR Gates 2-107
MC1030, MC1230	Quad Exclusive OR Gates 2-111
MC1031, MC1231	Quad Exclusive NOR Gates 2-115
 FLIP-FLOPS	
MC1013, MC1213	85-MHz AC-Coupled J-K Flip-Flops 2-119
MC1027, —	120-MHz AC-Coupled J-K Flip-Flop 2-127
MC1014, MC1214	Dual R-S Flip-Flops (Positive Clock) 2-133
MC1015, MC1215	Dual R-S Flip-Flops (Negative Clock) 2-137
MC1016, MC1216	Dual R-S Flip-Flops (Single Rail, Positive Clock) 2-141
MC1033, MC1233	Dual R-S Flip-Flops (Single Rail, Negative Clock) 2-147
MC1022, MC1222	Type "D" Flip-Flops 2-153
 MEMORY, TRANSLATOR, AND INPUT-OUTPUT CIRCUITS	
MC1017, MC1217	Saturated Logic-to-MECL Translators 2-157
MC1018, MC1218	MECL-to-Saturated Logic Translators 2-161
MC1020, MC1220	Quad Line Receivers 2-165
MC1036, 1037, —	16-Bit Coincident Memory 2-169
 COMPLEX LOGIC FUNCTIONS	
MC1019, MC1219	Full Adders 2-173
MC1021, MC1221	Full Subtractors 2-177
MC1029, MC1229	Data Distributor 2-181
 HIGH-SPEED MECL II	
MC1023, —	Dual 4-Input Clock Driver 2-185

NUMERICAL INDEX (Functions and Characteristics)

$V_{CC} = 0, V_{EE} = -5.2 \text{ V}, T_A = 25^\circ\text{C}$

Function	Type		DC Output Loading Factor each Output	Propagation Delay t_{pd} ns typ	Total Power Dissipation mW typ	Page No.
	Case 83 -55 to +125°C	Case 93 0 to +75°C				
Single 6-Input Gate, 3 "OR" Outputs w Pulldowns 3 "NOR" Outputs w Pulldowns	MC1201F	MC1001P	25	4.0	115	2-89
Single 6-Input Gate, 3 "OR" Outputs w Pulldowns 3 "NOR" Outputs w/o Pulldowns	MC1202F	MC1002P	↓	↓	80	↓
Single 6-Input Gate, 3 "OR" Outputs w/o Pulldowns 3 "NOR" Outputs w/o Pulldowns	MC1203F	MC1003P	↓	↓	40	↓
Dual 4-Input Gate, 2 "OR" Outputs w Pulldowns 2 "NOR" Outputs w Pulldowns	MC1204F	MC1004P	↓	↓	95	2-99
Dual 4-Input Gate, 2 "OR" Outputs w Pulldowns 2 "NOR" Outputs w/o Pulldowns	MC1205F	MC1005P	↓	↓	65	↓
Dual 4-Input Gate, 2 "OR" Outputs w/o Pulldowns 2 "NOR" Outputs w/o Pulldowns	MC1206F	MC1006P	↓	↓	45	↓
Triple 3-Input Gate, 3 "NOR" Outputs w Pulldowns	MC1207F	MC1007P	↓	↓	110	2-103
Triple 3-Input Gate, 1 "NOR" Output w Pulldowns 2 "NOR" Outputs w/o Pulldowns	MC1208F	MC1008P	↓	↓	75	↓
Triple 3-Input Gate, 3 "NOR" Outputs w/o Pulldowns	MC1209F	MC1009P	↓	↓	60	↓
Quad 2-Input Gate, 4 "NOR" Outputs w Pulldowns	MC1210F	MC1010P	↓	↓	115	2-107
Quad 2-Input Gate, 2 "NOR" Output w Pulldowns 2 "NOR" Output w/o Pulldowns	MC1211F	MC1011P	↓	↓	95	↓
Quad 2-Input Gate, 4 "NOR" Outputs w/o Pulldowns	MC1212F	MC1012P	↓	↓	65	↓
85 MHz AC Coupled J-K Flip-Flop	MC1213F	MC1013P	↓	6.0	125	2-119
Dual R-S Flip-Flop (Positive Clock)	MC1214F	MC1014P	↓	↓	140	2-133
Dual R-S Flip-Flop (Negative Clock)	MC1215F	MC1015P	↓	↓	140	2-137
Dual R-S Flip-Flop (Single Rail, Positive Clock)	MC1216F	MC1016P	↓	↓	140	2-141
Level Translator (Sat. Logic to MECL)	MC1217F	MC1017P	25 (MECL)	15	105	2-157
Level Translator (MECL to Sat. Logic)	MC1218F	MC1018P	7 (DTL)	20	70	2-161
Full Adder	MC1219F	MC1019P	25	4.0	110	2-173
Quad Line Receiver	MC1220F	MC1020P	↓	↓	115	2-165
Full Subtractor	MC1221F	MC1021P	↓	↓	110	2-177
Type "D" Flip-Flops	MC1222F	MC1022P	↓	8.0	110	2-153
Dual 4-Input "OR/NOR" Clock Driver	—	MC1023P	↓	2.0	250	2-185
Dual 2-Input Expandable Gate	MC1224F	MC1024P	↓	4.0	95	2-93
Dual 4 and 5 Input Expander	MC1225F	MC1025P	—	—	—	2-97
120 MHz AC Coupled J-K Flip-Flop	—	MC1027P	25	4.0	250	2-127
Data Distributor	MC1229F	MC1029P	↓	4.0	160	2-181
Quad Exclusive OR Gate	MC1230F	MC1030P	↓	5.0	130	2-111
Quad Exclusive NOR Gate	MC1231F	MC1031P	↓	5.0	130	2-115
Dual R-S Flip-Flop (Single Rail, Negative Clock)	MC1233F	MC1033P	↓	6.0	140	2-147
16-Bit Coincident Memory	—	MC1036P	5	17	250	2-169
16-Bit Coincident Memory w/o Pulldowns	—	MC1037P	5	17	250	2-169

LOADING DIAGRAMS

MECL II MC1000/1200 series


The logic diagrams shown describe the circuits of the MECL II line and permit quick selection of those circuits required to implement a particular logic system. Pertinent information, such as logic equations, truth tables, typical propagation delay time (t_{pd}), and typical power dissipation per package (P_D) is provided to show line compatibility. Package pin numbers and dc loading factors for each device are specified on each logic diagram. The numbers at the ends of the terminals are package pin numbers. The numbers in parentheses indicate dc loading factors at each terminal.

MECL II circuits contain internal bias networks, insuring that the transition point is always in the center of the transfer characteristic curves over the temperature range.

$$(V_{CC} = \text{PIN 14}, V_{EE} = \text{PIN 7})$$

GATES

**MC1001P, MC1002P, MC1003P
MC1201F, MC1202F, MC1203F
6-Input Gate**




$$1 = 4 + 5 + 6 + 8 + 9 + 10$$

$$11 = 4 + 5 + 6 + 8 + 9 + 10$$

$t_{pd} = 4.0 \text{ ns}$

$P_D = \text{MC1001/MC1201} - 115 \text{ mW}$
 $\text{MC1002/MC1202} - 80 \text{ mW}$
 $\text{MC1003/MC1203} - 40 \text{ mW}$

**MC1007P, MC1008P, MC1009P
MC1207F, MC1208F, MC1209F
Triple 3-Input Gate**




$$4 = 1 + 2 + 3$$

$t_{pd} = 4.0 \text{ ns}$

$P_D = \text{MC1007/MC1207} - 110 \text{ mW}$
 $\text{MC1008/MC1208} - 75 \text{ mW}$
 $\text{MC1009/MC1209} - 60 \text{ mW}$

**MC1010P, MC1011P, MC1012P
MC1210F, MC1211F, MC1212F
Quad 2-Input Gate**




$$3 = 1 + 2$$

$t_{pd} = 4.0 \text{ ns}$

$P_D = \text{MC1010/MC1210} - 115 \text{ mW}$
 $\text{MC1011/MC1211} - 95 \text{ mW}$
 $\text{MC1012/MC1212} - 65 \text{ mW}$

**MC1004P, MC1005P, MC1006P
MC1204F, MC1205F, MC1206F
Dual 4-Input Gate**




$$5 = 1 + 2 + 3 + 4$$

$$6 = 1 + 2 + 3 + 4$$

$t_{pd} = 4.0 \text{ ns}$

$P_D = \text{MC1004/MC1204} - 95 \text{ mW}$
 $\text{MC1005/MC1205} - 65 \text{ mW}$
 $\text{MC1006/MC1206} - 45 \text{ mW}$


**MC1030P, MC1230F
Quad Exclusive OR Gate**



$$2 = 1 \cdot \bar{3} + \bar{1} \cdot 3$$

$t_{pd} = 5.0 \text{ ns}$
 $P_D = 130 \text{ mW}$


**MC1031P, MC1231F
Quad Exclusive NOR Gate**



$$2 = 1 \cdot 3 + \bar{1} \cdot \bar{3}$$

$t_{pd} = 5.0 \text{ ns}$
 $P_D = 130 \text{ mW}$

**MC1024P, MC1224F
Dual 2-Input Expandable Gate**



$$5 = 2 + 3$$

$$6 = 2 + 3$$

$t_{pd} = 4.0 \text{ ns}$
 $P_D = 95 \text{ mW}$

FLIP-FLOPS

MC1013P, MC1213F
85 MHz AC-Coupled J-K Flip Flop

$t_{pd} = 6.0 \text{ ns}$
 $P_D = 125 \text{ mW}$

J	K	\bar{C}_D	Q^n
0	0	0	Q^n
0	0	1	\bar{Q}^n
0	1	1	1
1	0	1	0
1	1	1	Q^n

MC1014P, MC1214F
MC1015P, MC1215F
Dual Clocked R-S Flip-Flop

$t_{pd} = 6.0 \text{ ns}$
 $P_D = 140 \text{ mW}$

C	R	S	Q^{n+1}
1	0	0	Q^n
1	0	1	1
1	1	0	0
1	1	1	ND
0	0	0	Q^n

C	R	S	Q^{n+1}
0	0	0	Q^n
0	0	1	1
0	1	0	0
0	1	1	ND
1	0	0	Q^n

MC1027P
120 MHz AC-Coupled J-K Flip-Flop

$t_{pd} = 4.0 \text{ ns}$
 $P_D = 250 \text{ mW}$

R	S	Q^{n+1}
0	1	1
1	0	0
0	0	Q^n
1	1	N.D.

MC1016P, MC1216F
MC1033P, MC1233F
Dual Clocked Single Rail R-S Flip-Flop

$t_{pd} = 6.0 \text{ ns}$
 $P_D = 140 \text{ mW}$

C	D	Q^{n+1}
0	0	Q^n
0	1	Q^n
1	0	0
1	1	1

C	D	Q^{n+1}
1	0	Q^n
1	1	Q^n
0	0	0
0	1	1

MC1022P, MC1222F
Type "D" Flip-Flop

POSITIVE LOGIC

$t_{pd} = 8.0 \text{ ns}$
 $P_D = 110 \text{ mW}$


R	S	Q^{n+1}	\bar{Q}^{n+1}
8 or 9	10 or 11	5	6
0	0	Q^n	\bar{Q}^n
0	1	1	0
1	0	0	1
1	1	N.D.	N.D.

N.D. = Not Defined


D	C	Q^{n+1}	\bar{Q}^{n+1}
12 or 13	2 or 4	5	6
0	0	Q^n	\bar{Q}^n
1	0	Q^n	\bar{Q}^n
0	1*	0	1
1	1*	1	0

*A "1" or Clock input is defined for this flip-flop as a change in level from a low input to a high input.


DRIVER

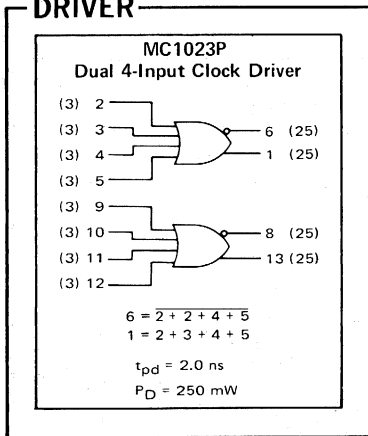


DATA DISTRIBUTOR

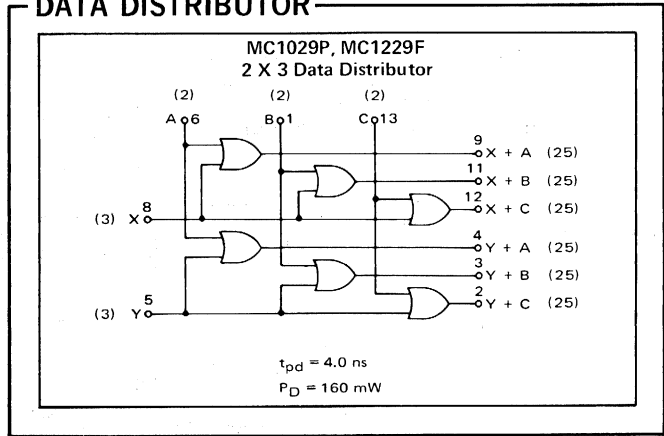


RECEIVER

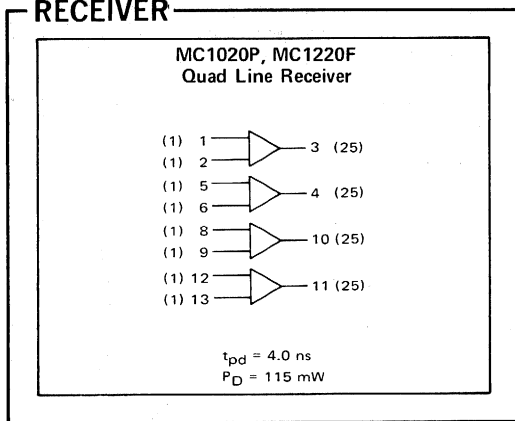


EXPANDER

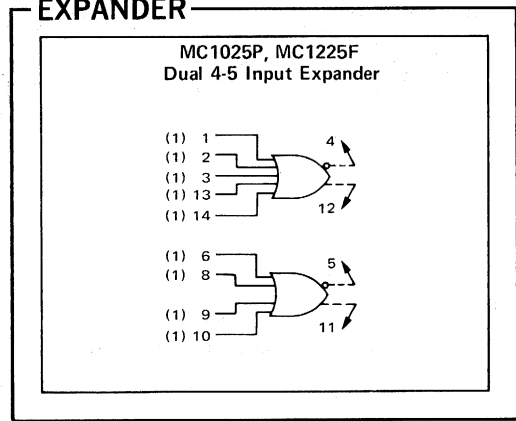


TRANSLATORS

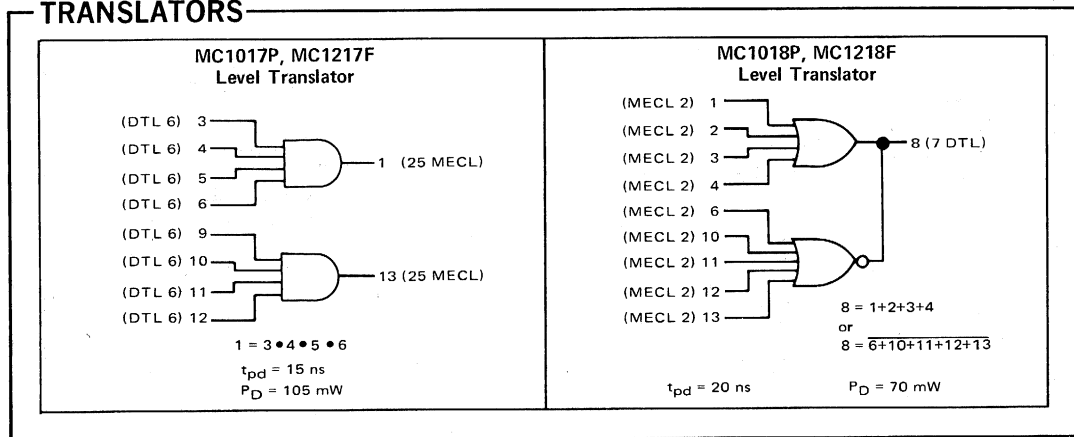


FULL ADDER

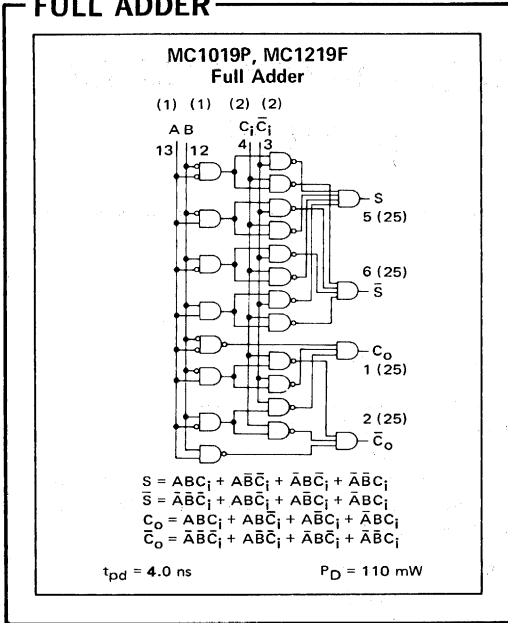

SUBTRACTOR

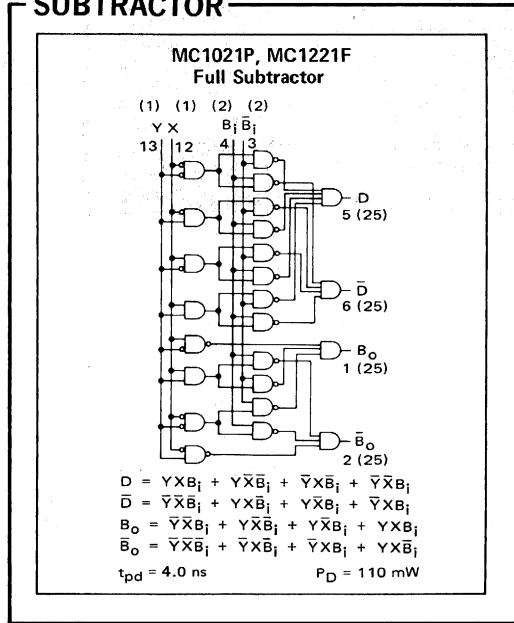

MEMORY

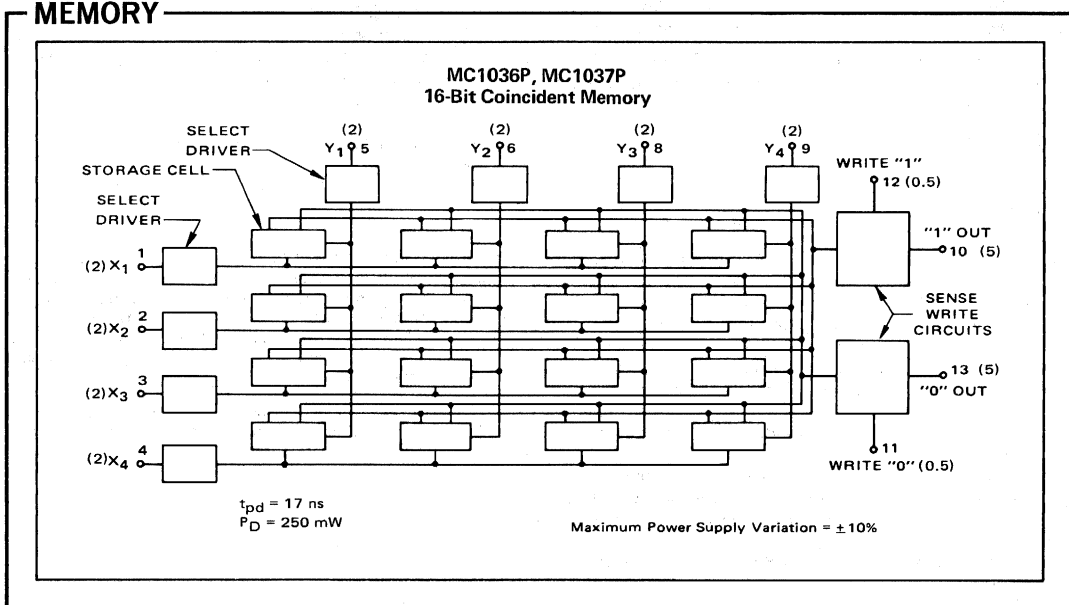

MECL II

GENERAL INFORMATION SECTION

INTRODUCTION

The MECL II family of Emitter-coupled Logic (current mode logic) was designed as a non-saturating form of logic which eliminates transistor storage time as a speed limiting characteristic, and permits extremely high-speed operation.

The typical MECL II circuit comprises a differential-amplifier input with internal bias reference and with emitter-follower outputs to restore dc levels. High fan-out operation is possible because of the high input impedance of the differential amplifiers and the low output impedance of the emitter followers. Power-supply noise is virtually eliminated by the nearly constant current drain of the differential amplifier, even during the transition period. Basic gate design provides for simultaneous output of both the function and its complement.

MECL II DESIGN PHILOSOPHY

The following goals have been met by MECL II, resulting in the most economical form of logic for system design:

- I. Availability has been maximized through:
 - A. Non-stringent processing requirements
 - B. Optimized chip and device size
 - C. Specifications determined by distribution data, on parts produced in volume, analyzed for system design requirements.
 - D. Internal specification guard-bands set to minimize correlation problems.
- II. Rise and fall times of basic family are kept slow enough to be compatible with conventional layout techniques such as two-sided printed circuit boards and point-to-point backplane wiring.
- III. MECL II is compatible with the original MECL (MC300 and MC350 Series).
- IV. Logic has been maximized for 14-pin packages by using complex functions wherever economical.

MECL II devices are specified over two temperature ranges: 0 to 75°C (MC1000 Series) and -55 to 125°C (MC1200 Series). The MC1000 Series is available in the dual in-line plastic package (add suffix "P" to basic type number) and the MC1200 Series in the TO-86 ceramic flat package (suffix "F").

Family characteristics are:

- 4.0 ns propagation delay
- DC fan-out of 25 minimum
- High-frequency operation, if required
- Excellent speed-power product
- Constant current drain regardless of logic state or operating frequency
- ±20% power supply tolerance

System features include:

- Minimized cross-talk
- Reduced power dissipation and can count through Wired-OR and the series gating design techniques
- Guaranteed worst-case noise margin
- Single power supply
- Ease of designing parallel rather than serial logic

During design, the cost to run a problem or to do a specified amount of work on a system should be considered. To run a problem on a system, the costs decrease with increasing circuit speeds due to shorter running times. An increase in costs is experienced when using logic faster than 4.0 ns, and is caused by the required switch to stripline and ground-plane techniques. This will result in added expense in packaging and layout.

The enclosed individual device specifications show that MECL II is optimized for economy when computer operating time is compared with packaging and layout costs.

SYSTEM CHARACTERISTICS

MECL II provides several important systems features. A noise immunity-power dissipation trade-off is possible by varying the supply voltage of the system. Figures 1 and 2 show the OR and NOR transfer characteristics of typical MECL II gates as the supply voltage is varied. For example, noise immunity may be increased by 0.100 V by increasing the supply voltage to -6.0 V, which increases power dissipation by 35%.

Figures 3 through 7 illustrate the typical characteristics of MECL II versus temperature and supply voltage changes. There is minimal change in system operating characteristics for $\pm 10\%$ supply variation. The largest change is observed at 125°C and elevated supply voltages, where the gates will be operating into the saturation region which significantly reduces operating speeds.

For driving long lines with MECL II, or interfacing between systems that have a large difference in operating temperature, balanced twisted-pair lines are recommended. The differential output of a MECL gate drives the line. The far end is terminated in the characteristic impedance of the line and received by a differential amplifier. (See the discussion with MC1020/MC1220 Quad Line Receiver.) This method yields 1.0 V or better noise immunity at a very low impedance.

A significant feature of MECL II is its low generated noise and cross-talk in a system. The output rise and fall times are approximately the same as the propagation delay times, minimizing capacitive cross-talk. The noise immunity as a percentage of logic swing is also larger than standard saturated logic. The very low logic currents switched in the lines also appreciably reduce inductive cross-talk. If line lengths are kept short with respect to the fastest rise or fall time of noise, then the line is effectively clamped to the 15-ohm output impedance of the gate. This then requires considerable energy to overcome the voltage noise immunity of the gate. MECL II also shows a significant improvement over saturated logic rejection of noise and voltage variations due to poor regulation on the supply line.

FIGURE 1 - TYPICAL "OR" TRANSFER CHARACTERISTICS

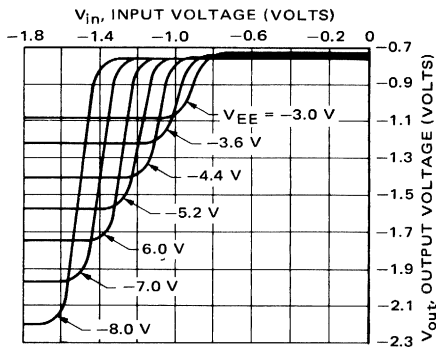


FIGURE 2 - TYPICAL "NOR" TRANSFER CHARACTERISTICS

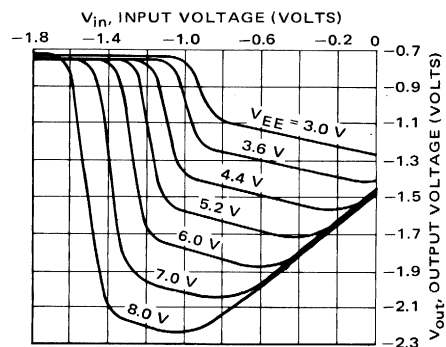


FIGURE 3 - RISE TIME versus TEMPERATURE AND SUPPLY VOLTAGE

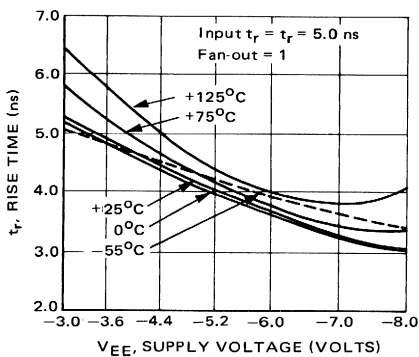


FIGURE 4 - FALL TIME versus TEMPERATURE AND SUPPLY VOLTAGE

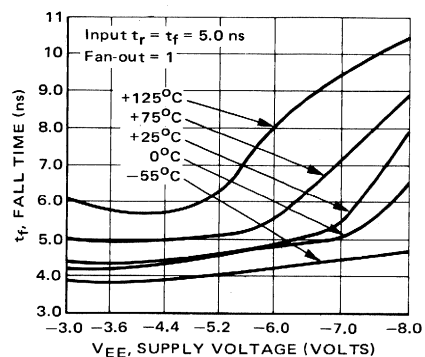


FIGURE 5 - PROPAGATION DELAY t_{pd+} versus TEMPERATURE AND SUPPLY VOLTAGE

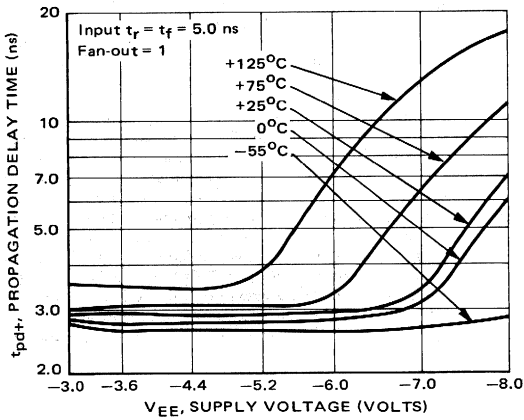


FIGURE 6 - PROPAGATION DELAY t_{pd-} versus TEMPERATURE AND SUPPLY VOLTAGE


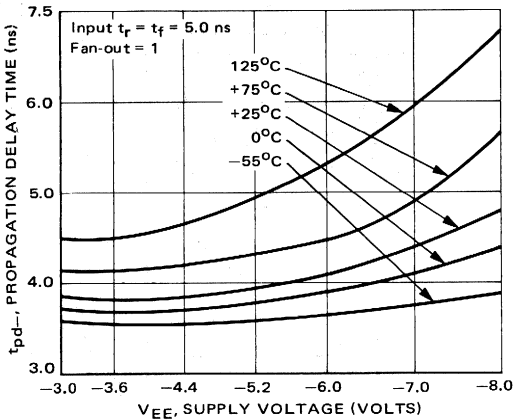


FIGURE 7 - LOGIC SWING versus TEMPERATURE AND SUPPLY VOLTAGE

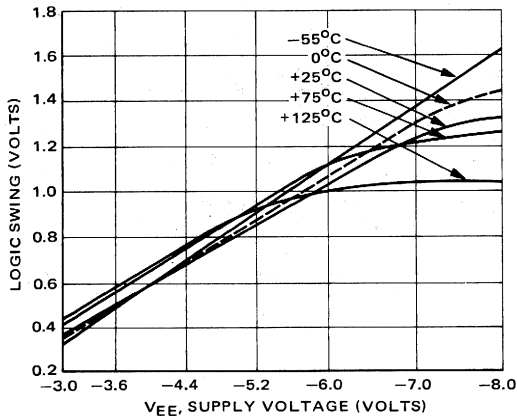


GENERAL DESIGN AND SYSTEM LAYOUT RULES

"OR"ING FEATURES

The outputs of several gates may be tied together to perform the Wired-OR function. A recommended maximum of 15 outputs should be ORed together if high-speed operation is desired. If speed is not a system requirement, a greater number of outputs may be ORed together. One pull-down resistor per Wired-OR function is recommended as a power saving feature. Two pull-downs result in appreciably better fall times with high capacitance loads. The high logic level noise immunity is reduced by a negligible amount. Three pull-down resistors reduce noise immunity typically by 50 mV and therefore are not generally recommended. As separate gates drive the Wired-OR output to the high level, approximately 3.0 mA current will be switched through the interconnecting leads with a rise time as short as 3.0 ns. To maintain the very low crosstalk advantages of MECL, it is not recommended that Wired-OR be employed on a computer back-plane but be restricted to printed circuit cards.

FIGURE 8 - EXAMPLE OF MULTIPLE OUTPUT GATE INTERCONNECTIONS

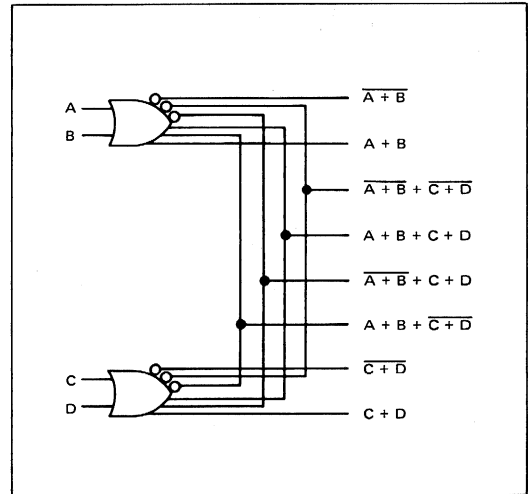

UNUSED INPUTS

All unused inputs must be tied to V_{EE} for reliable system operation. As seen from the gate input characteristics (Figure 11), the input impedance of a gate is very high when at a low-level voltage. Any leakage to the input capacitance of the gate will gradually build up a voltage on the input lead. This may affect noise immunity of the gate or hinder switching characteristics at low repetition rates. Returning the unused inputs to V_{EE} insures no build-up of voltage, and a noise immunity dependent only upon the inputs used. The emitter-base breakdown voltage of the transistors used is in excess of -6.5 V and will not start to clamp the voltage across the differential pair current source until a V_{EE} greater than -8.0 V is applied to a gate, nor will device failure occur since base current is limited internally. For most evaluation and breadboarding purposes, unused inputs may be left open with negligible difference in results.

FAN-IN

A maximum fan-in of 20 is recommended for high-speed operation. Greater fan-in may be employed if fast propagation delay, rise, and fall times are not required. Further discussion is found on the data sheets for the MC1024/MC1224 Dual 2-Input Gates and the MC1025/MC1225 Dual Expanders.

V_{BB} SUPPLY

None of the MECL II devices require an external V_{BB} or reference supply, however V_{BB} has been brought out externally on the MC1017/MC1217 and MC1018/MC1218 translators for those who may require it. To maintain noise margin levels on MECL II, the maximum recommended load current for V_{BB} is 1.0 mA.

SYSTEM LAYOUT

As rise and fall times decrease, more restrictions are required on system layout. Standard MECL II exhibits typical rise, fall, and propagation delay times of 4.0 ns, but due to process and layout variations these may go as low as 3.0 ns. MECL II has been designed to be as fast as practical without requiring non-standard layout techniques such as ground planes on printed circuit boards. Two-sided printed circuit cards are still satisfactory for 3.0 ns rise times, especially since MECL draws constant current from the power supply.

Reflections that occur on high-impedance unterminated lines are a function of logic rise and/or fall times. For example, reflections can be a problem with 1.0 ns rise time and high-impedance wire lengths greater than three inches. For MECL II, maximum wire length of 12 inches is recommended. Wire length of 36 inches or more may be driven if a small ferrite bead is slipped over the wire. The ferrite bead attenuates the high-frequency components of the fast rise or fall times and therefore damps out overshoot, ringing, and reflections. Also if a wire is run adjacent to a ground plane, effective inductance per unit length may be reduced by one-half that observed when the wire is a couple of inches above the ground plane. When long wires are being driven, a recommended fan-in of one should be employed at the receiving end. Higher fan-in increases the mismatch of high impedance wires. See the discussion in Application Note AN-277 which gives methods of reducing overshoot to acceptable levels where both long leads and high fan-in are employed. Long leads and high fan-out and fan-in are less of a problem on a printed circuit board where high width-to-thickness ratios of the printed leads greatly reduce inductance. High-speed clock drivers (2.0 ns) can be used satisfactorily on two-sided printed circuit boards if the layout is designed properly.

CLOCK DISTRIBUTION

Clock distribution is one of the largest system problems. Where large high-speed clock networks are required, a balanced twisted pair line is recommended for clock distribution. A gate such as the MC1001/MC1201 and the MC1020/MC1220 Quad Line Receiver make an excellent combination for distributing the clock throughout a system at frequencies to 50 MHz. (See the MC1020/MC1220 data sheet for further detail.) This method allows control of clock skew time and offers 1.0 V or better noise immunity regardless of line length.

DEFINITIONS

e _g	Generator inputs to test circuit.
I _{BL}	Base leakage current of a MECL expander input when at V _{EE} .
I _C	Total power supply current drawn from the positive supply by the test unit.
I _{CEX}	Total collector leakage current exhibited by the gate expander when all inputs are at the negative supply potential.
I _E	Total power supply current drawn from the test unit by the negative power supply.
I _F	Forward diode current drawn from an input of a saturated logic-to-MECL translator when that input is at ground potential.
I _{in}	Current drawn by the input of the test unit when a maximum logical "1" (V _{IH max}) is applied at that input.
I _L	Load current that is applied through a MECL circuit output when measuring the output "1" level voltage.
I _{OH}	Load current that is applied through a saturating output of a translator when measuring the output "1" level.
I _{OL}	Load current that is applied through a saturating output of a translator when measuring the output "0" level.
I _{out}	Output current.
I _R	Reverse current drawn from a transistor input of the test unit when V _{EE} is applied at that input.
I _{SC}	Short-circuit current drawn from a translator saturating output when that output is at ground potential.
t _f	Time required for the output pulse to go more negative from its 90% point to its 10% point.
t _{pd} , t _{x±y±}	Propagation delay time from the 50% point of the input waveform at pin x (falling edge noted by - or rising edge noted by +) to the 50% point of the output waveform at pin y (falling edge noted by - or rising edge noted by +).
t _r	Time required for the output pulse to go more positive from its 10% point to its 90% point.
TP _{in}	Test point at input of unit under test.
TP _{out}	Test point at output of unit under test.
V _{BB}	Bias reference supply voltage (-1.175 V nominal at 25°C).
V _{BE}	Base-to-emitter voltage drop of a transistor.
V _{CB}	Collector-to-base voltage drop of a transistor.
V _{CC}	Most positive power supply voltage for a circuit.
V _{EE}	Most negative power supply voltage for a circuit.
V _{in}	Input voltage.
V _{IH max}	Maximum input logical "1" level voltage.
V _{IH min}	Minimum input logical "1" level (threshold) voltage.
V _{IL max}	Maximum input logical "0" level (threshold) voltage.
V _{IL min}	Minimum input logical "0" level voltage.
V _L	Latch voltage of a dc flip-flop.
V _{OH max}	Maximum output "1" or high-level voltage.
V _{OH min}	Minimum output "1" or high-level voltage.
V _{OL max}	Maximum output "0" or low-level voltage.
V _{OL min}	Minimum output "0" or low-level voltage.
V _{out}	Output voltage.
V _{max}	Maximum positive supply voltage.

MECL II

GENERAL INFORMATION SECTION

THE BASIC MECL II LOGIC GATE

Each digital integrated circuit family is built around a basic circuit which determines the general characteristics of the family. The basic MECL II gate is evaluated in terms of circuit operation, transfer characteristics, noise margin, speed, component tolerances, and logic flexibility.

CIRCUIT OPERATION

Figure 9 illustrates a 4-input OR-NOR MECL II gate; Figure 10 depicts MECL II transfer characteristics and specification points. Typical operating voltages are $V_{CC} = \text{ground}$ and $V_{EE} = -5.2 \text{ V}$. The internal bias (V_{BB}) is designed for a nominal -1.175 V in reference to V_{CC} . When the gate inputs are all at a low level ($V_{in} \leq V_{IL \text{ max}}$) the input transistors will not be conducting current and the V_{BB} transistor will act as an emitter follower. At 25°C the V_{BE} -drop of a silicon integrated transistor averages around 0.750 V for base currents within the nominal operating region. Therefore the voltage at point 3 in Figure 9 is $V_{BB} - 0.750 \text{ V}$ or -1.925 V . This potential establishes an I_E of 2.77 mA through the 1.18 k-ohm emitter resistor. I_E also causes a drop of 0.830 V across the 300-ohm collector resistor. The OR output is then obtained through an emitter follower which drops the output voltage to a nominal -1.580 V , which is a logic "0" or low logic level. The base of the NOR output transistor is essentially at 0 V , yielding an output of -0.750 V or the nominal "1" logic level.

If one or more of the gate inputs is switched to a high level ($V_{in} \geq V_{IH \text{ min}}$), the current from point 2 to point 3 will switch from point 1 to point 3. Point 3 is now at -1.500 V resulting in an I_E of 3.14 mA which causes a drop of 0.900 V across the 290-ohm resistor. The nominal NOR output voltage is then -1.650 V or 0.070 V lower than the OR output. The reasons for this are seen from the transfer characteristics shown in Figure 10. Observing the NOR transfer characteristics as V_I increases from $V_{IL \text{ min}}$ to $V_{IL \text{ max}}$, it is seen that the output remains at a high level. For V_I increasing from $V_{IL \text{ max}}$ to $V_{IH \text{ min}}$, the NOR output will switch to a low level. Then as the input continues more positive than $V_{IH \text{ min}}$, the output will continue more negative with a slope of about -0.24 . This is caused by the input collector node going more negative as V_I goes more positive. If the input is increased above $V_{IH \text{ max}}$, saturation will be reached at an input of about -0.40 V . Beyond this point, the base-collector junction is forward biased and the collector voltage will increase with an increasing input level. The nominal NOR low-level output is designed to be more negative than the nominal OR low-level output, to assure that at an input of $V_{IH \text{ min}}$ the output is still more negative than $V_{OL \text{ max}}$. Thus equal noise margins may be guaranteed for OR and NOR outputs.

The transfer characteristics (Figure 10) show that MECL II operating levels are well below the point at which the gate starts to saturate. The saturation temperature for MECL II devices is nominally 140°C ambient. Since the transistors stay out of the saturation region, current mode is inherently the fastest form of logic obtainable. Typically gates exhibit an average propagation delay of 4.0 ns when wired into a system.

The differential input of the MECL gate offers several advantages. Input impedance is high due to the emitter follower inputs. A worst-case current of $100 \mu\text{A}$ is guaranteed. (See Figure 11 for input characteristics.) The voltage gain and transfer characteristics are practically independent of transistor parameters. The input thresholds are determined effectively by the internal V_{BB} due to the V_{BE} match of integrated circuit transistors. The collectors of the differential amplifier provide the complementary outputs at essentially the same propagation delay time. The differential input is also responsible for common mode rejection of power supply variations.

FIGURE 9 - BASIC MECL II GATE

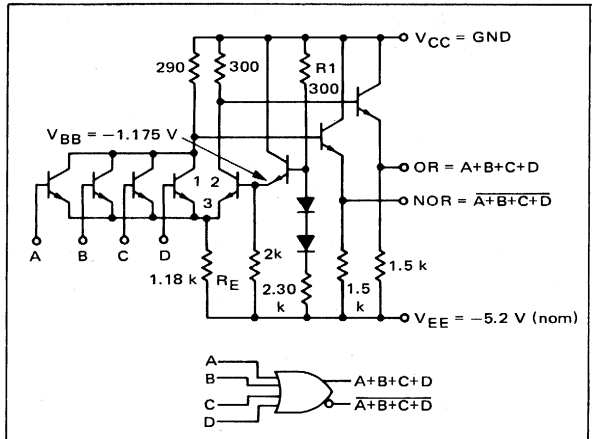


FIGURE 10 - MECL II TRANSFER CHARACTERISTICS AND SPECIFICATION POINTS


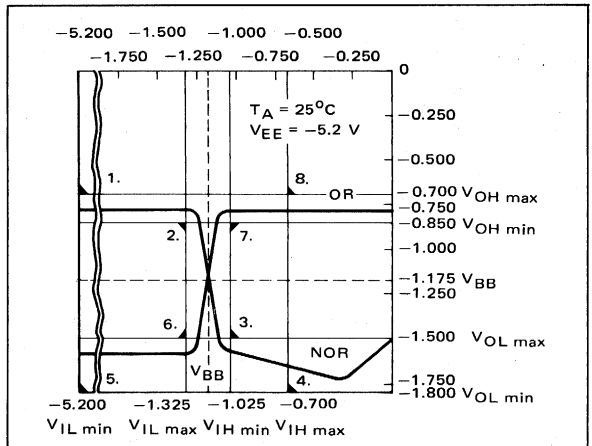



FIGURE 11 - TYPICAL INPUT VOLTAGE versus INPUT CURRENT

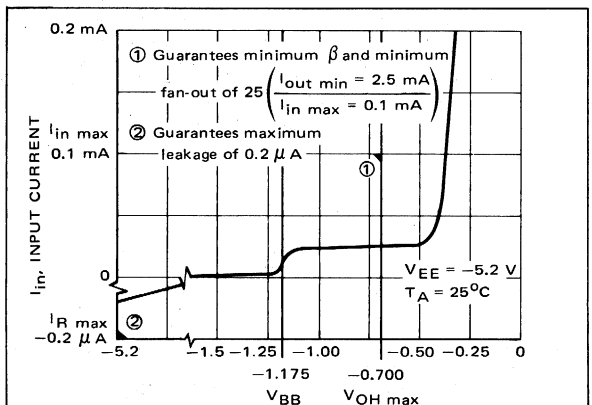

The emitter follower outputs offer low output impedance. Typically 15 ohms or less is measured, while a worst-case impedance of 20 ohms should be considered for any design requirements. See Figure 12 for output characteristics and specification points. The emitter follower outputs also permit the positive Wired-OR function to be obtained by tying outputs together.

Logic "0" levels in the MECL II gate are determined by resistor ratios rather than absolute values of resistance. Ratios can be held to within $\pm 5\%$ while absolute values can vary by $\pm 20\%$. This is a significant advantage in MECL processing. The transistors used in MECL II gates have a typical β of 150. Circuit restrictions on β are much wider than normal processing variations which yields another processing advantage. One processing step — that of gold-doping — is eliminated since the transistors operate in the non-saturating mode.

FIGURE 12 - TYPICAL OUTPUT VOLTAGE versus OUTPUT CURRENT

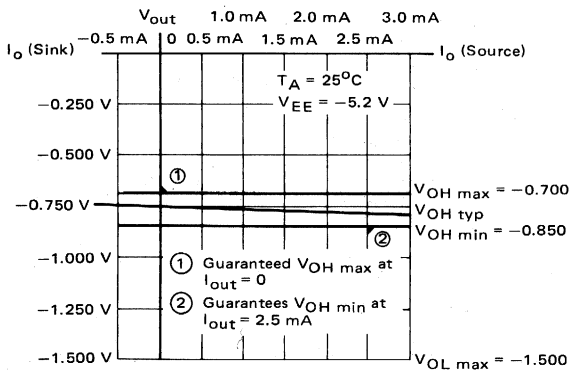

NOISE MARGIN

Noise margin may be defined as the difference between a worst-case logic level and the worst-case threshold closest to that logic level. The threshold point is sometimes defined as the point on a transfer characteristic curve where the slope is 1/1 indicating unity gain. For MECL II a more conservative threshold is defined as the worst-case input voltage ($V_{IH \min}$ or $V_{IL \max}$) for which the output is still within specified limits. Another method of testing noise immunity is obtained by cascading worst-case gates and testing to the minimum "noise" input that will just propagate through the gates. This method is more indicative of actual system operation, and is often referred to as "system noise immunity". The method corresponds to driving the gate into the active region until the output reaches a worst-case V_{BB} level which could then propagate through another gate. This method yields at least 0.040 V greater worst-case noise margin than the test methods employed, but it is very difficult to implement. Typical propagation noise immunity is 0.350 V for MECL II.

Figure 13 lists the worst-case limits for the basic MECL II family. Noise margin is easily obtained by subtracting $V_{IH \min}$ from $V_{OH \min}$ for high-level noise margin, and $V_{OL \max}$ from $V_{IL \max}$ for low-level noise margin. As seen from Figure 13, 0.175 V worst-case noise margin is guaranteed at all temperatures. Gates with higher guaranteed noise margin can be obtained by selection or special order. All noise specifications are also internally guard-banded to minimize correlation problems (a factor which also adds to actual system noise immunity). The worst-case "system noise immunity" (for noise to propagate through two or more worst-case gates) that can be measured with MECL II is 0.050 V greater than that specified in the brochure. For ex-

MECL II

GENERAL INFORMATION SECTION

ample, it will take more than 0.225 V of "noise" to propagate through MECL II gates specified at 0.175 V noise margin. The question often arises as to system noise margin with gates of different temperatures and power supply voltages driving one another. Figure 13 also lists the worst-case change in logic levels and threshold levels with a change in supply voltage. It is seen that the "1" logic levels are effectively independent of power supply voltage, the threshold level variance is less than 1/8 the change in V_{EE} , and the worst-case "0" logic level change is 1/4 of the V_{EE} change. These changes illustrate the common-mode rejection of power supply variations exhibited by MECL II. It may be shown that a MECL II system will operate with a $\pm 30\%$ variation in supply voltage, but it is recommended that a maximum variation of $\pm 20\%$ from the design nominal of -5.2 V be allowed. Supply variations of $\pm 10\%$ show negligible effect on system performance.

Figure 14 illustrates two worst-case system noise margin calculations with the data from Figure 13. It is seen that a system with a $\pm 5\%$ change in power supply voltage and 100°C temperature differential will still operate with worst-case devices.

Noise immunity is specified only for logic inputs. In system applications noise at both the V_{CC} and the V_{EE} nodes must be considered. The logical "1" levels in MECL II are one diode drop more negative than V_{CC} . Therefore V_{CC} noise immunity is basically the same as logic input noise immunity. In actual measurements, V_{CC} noise immunity is about 0.030 V higher than if the noise were imposed directly on a logic input. V_{EE} noise immunity is typically greater than 1.5 V due to the common-mode rejection of the basic gate.

POWER SUPPLY CONNECTIONS

Ground is usually the most stable and lowest impedance source in a system. For this reason, V_{CC} is usually at ground potential in a MECL system while V_{EE} is the supply voltage. Another advantage of having V_{CC} as ground is that an output may be shorted to ground without drawing high current. If an output is accidentally shorted to V_{EE} , no permanent damage will result. If an output remains shorted for long periods of time (especially with values of V_{EE} greater than -5.2 V), permanent degradation may result due to excessive chip temperatures. The output of high-speed MECL II devices such as the clock driver should not be shorted to V_{EE} due to its very low output impedance.

Nominal power dissipation of the MECL II circuit is 15 mW for the basic gate, 14 mW for each emitter follower pull-down resistor, and 18 mW for the built-in bias driver. Since MECL II devices are built of various combinations of the above, power dissipation per package and logic function can vary widely. For example, a single gate with six output pull-down resistors and a bias driver dissipates 120 mW, while a quad 2-input gate without pull-


FIGURE 13 - MECL II WORST-CASE LEVELS

VOLTAGE LEVEL	AMBIENT TEMPERATURE				
	125°C	75°C	25°C	0°C	-55°C
$V_{IH \max}$	-0.535	-0.600	-0.700	-0.735	-0.825
$V_{OH \max}$	-0.535	-0.600	-0.700	-0.735	-0.825
$V_{OH \min}$	-0.700	-0.775	-0.850	-0.895	-0.990
$V_{IH \min}$	-0.875	-0.950	-1.025	-1.070	-1.165
$V_{IL \max}$	-1.205	-1.260	-1.325	-1.350	-1.405
$V_{OL \max}$	-1.380	-1.440	-1.500	-1.525	-1.580
$V_{OL \min}$	-1.720	-1.760	-1.800	-1.830	-1.890
$V_{IL \min}$	< V_{EE}	< V_{EE}	< V_{EE}	< V_{EE}	< V_{EE}

$$\frac{\Delta V_{OH}}{\Delta V_{EE}} = 0.015 \max \quad \frac{\Delta(V_{IH \min}, V_{IL \max})}{\Delta V_{EE}} = \begin{matrix} 0.110 \min \\ 0.115 \text{ nom} \\ 0.120 \max \end{matrix}$$

$$\frac{\Delta(V_{OL \max}, V_{OL \min})}{\Delta V_{EE}} = \begin{matrix} 0.210 \min \\ 0.230 \text{ nom} \\ 0.250 \max \end{matrix}$$

FIGURE 14 - EXAMPLES OF WORST CASE NOISE MARGINS IN A MECL II SYSTEM

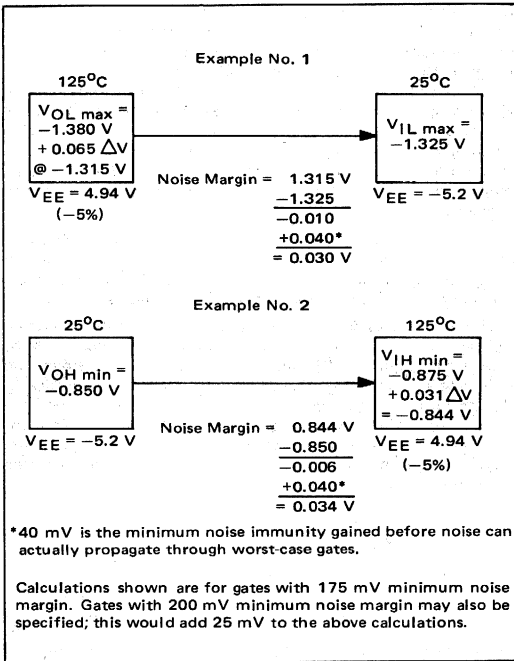

down resistors and with a single bias driver dissipates only 20 mW per gate. Normalized power dissipation curves versus temperature and supply voltages are shown in Figure 15. Power dissipation for system design should be 80% of the value calculated from the I_E maximum values specified on the various data sheets. Nominal power dissipation is lower (75% of the maximum value specified).

DC LOADING CONSIDERATIONS

Worst-case fan-out specifications are obtained from Figures 11 and 12. With a worst-case input current of $100\ \mu A$ and a minimum output current of 2.5 mA for a $V_{OH\ min}$ level, a fan-out of 25 is guaranteed. Figure 16 illustrates the typical input characteristics of a MECL II gate versus temperature and a wide excursion of input voltage. The output dc loading characteristics of MECL II are shown in Figure 17 for loads that greatly exceed normal operation. It may be observed from the curves that one MECL II gate could typically drive more than a thousand other gates before noise immunity dropped below 0.100 V. It is obvious that loading restrictions are normally ac rather than dc. The heaviest loading occurs under Wired-OR conditions. If only one pull-down resistor is used (recommended as a power saving feature), the dc loading is the same as for normal conditions. If two pull-down resistors are employed, an additional current of 3.6 mA maximum is drawn at $V_{EE} = -5.2\ V$ and $T_A = 25^\circ C$. $V_{OH\ min}$ is specified at 2.5 mA load current, but the worst-case pull-down resistor draws an additional 1.1 mA. A worst-case output impedance of 20 ohms would then give an additional drop of 0.022 V. If the Wired-OR also drives a nominal fan-out, the output may drop 0.025 V below $V_{OH\ min}$ which subtracts 0.025 V from the worst-case noise margin. For this reason a maximum of two pull-down resistors is recommended for worst-case system design. It should be noted that two pull-down resistors appreciably decrease fall time under high capacitance loading. Typically three pull-down resistors (an additional load of 6.0 mA) would give a V_{OH} of 0.850 V, which is $V_{OH\ min}$.

AC LOADING CONSIDERATIONS

The input capacitance of a MECL II gate averages 3.3 pF. Since in any system stray capacitance is also present, a typical value of 5.0 pF per fan-out should be used for design purposes. A fan-out of 15 MECL II gates is then roughly equivalent to 75 pF, while a fan-out of 20 gates would be approximately 100 pF. These figures may be easily decreased with careful layout techniques.

FIGURE 15 - NORMALIZED POWER DISSIPATION versus TEMPERATURE AND SUPPLY VOLTAGE

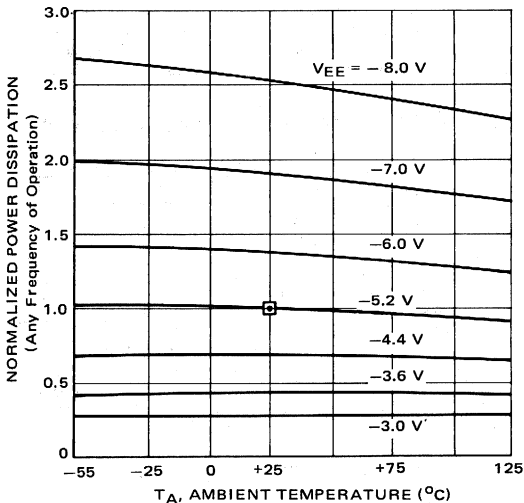


FIGURE 16 - INPUT CURRENT versus INPUT VOLTAGE AND TEMPERATURE



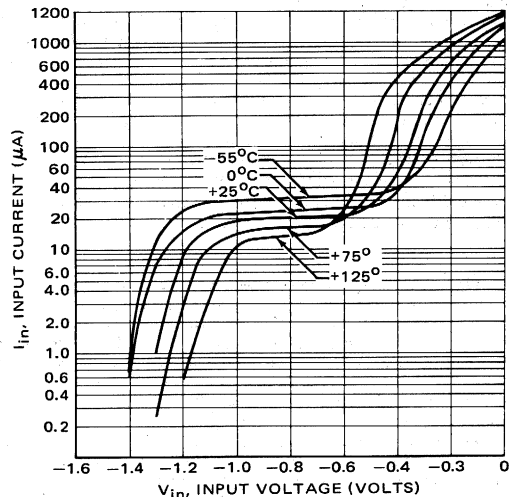


FIGURE 17 - TYPICAL OUTPUT VOLTAGES versus LOAD CURRENT (Ambient Temperature)

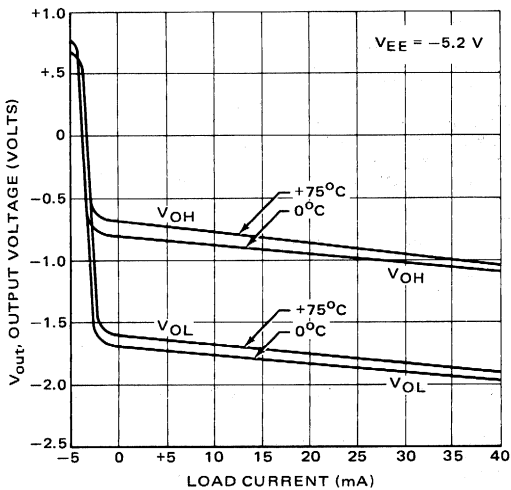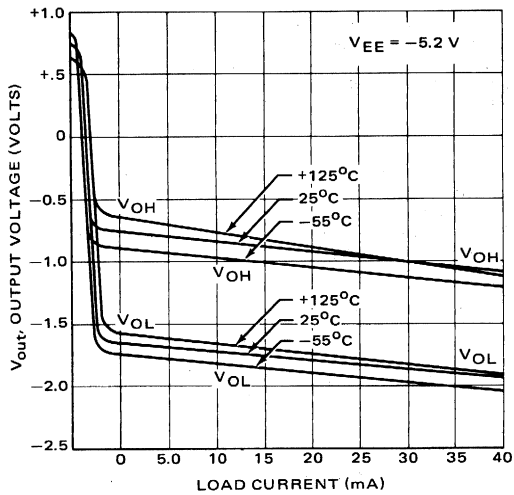

SWITCHING TIMES

Figures 18 through 21 give typical rise, fall, and propagation delay times versus loading and temperature. The slow fall times and t_{pd-} are caused by the relatively long R-C time constant of the emitter pull-down resistor and the load capacitance. The fall time, t_f , may be calculated as $0.2 RC$, where R is the value of the pull-down resistor (in $k\Omega$) and C is the external load capacitance (in pF). For example, with a 100 pF load and a 1.5 k-ohm internal resistor, the fall time is approximately 30 ns. The increase in t_{pd-} over the delay at no load is very closely obtained by $0.1 RC$. At no load, t_{pd-} is approximately 3.5 ns, and $0.1 RC$ with a 100 pF load is 15 ns, giving a total of 18.5 ns for t_{pd-} . The RC time constant of the load may be reduced significantly (for high capacitance) by paralleling an external resistance with the load to V_{EE} .

MECL II

GENERAL INFORMATION SECTION

FIGURE 18 - RISE TIME versus LOADING AND TEMPERATURE

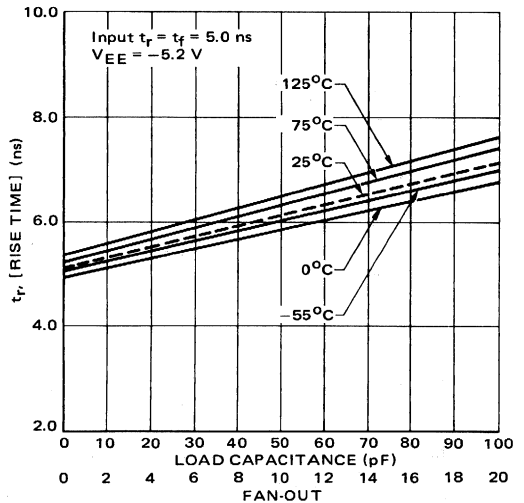


FIGURE 19 - FALL TIME versus LOADING AND TEMPERATURE (Single Pulldown Resistor)

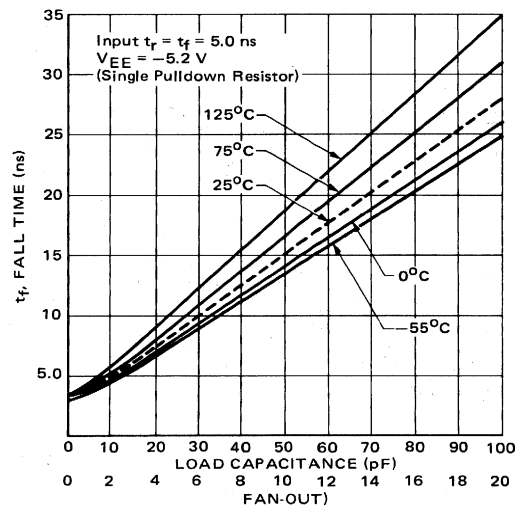


FIGURE 20 - PROPAGATION DELAY t_{pd+} versus LOADING AND TEMPERATURE


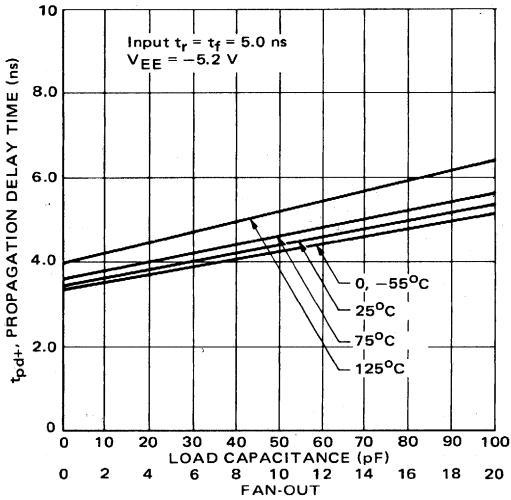


FIGURE 21 - PROPAGATION DELAY t_{pd-} versus LOADING AND TEMPERATURE

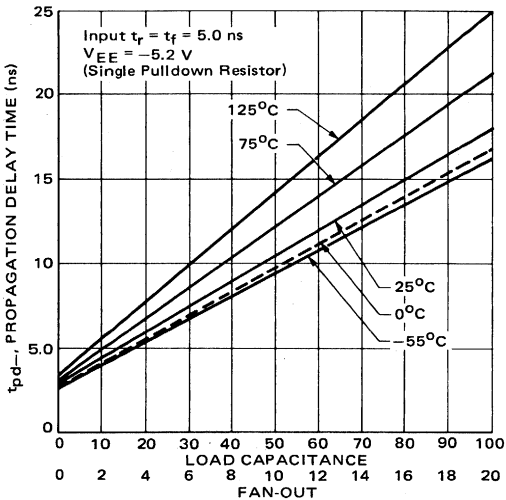

THERMAL CHARACTERISTICS

The junction temperature of the integrated circuit is closely related to its long term operational characteristics; therefore, an accurate estimate of the junction temperature of the various circuit components must be made before the circuit designer can predict the expected reliability of his system. Motorola is including sufficient information in this section to permit the user of MECL II to estimate worst-case junction temperatures if he can estimate accurately the ambient or case temperatures and the operating circuit's power drain.

The average temperature at the junction region is a function of the systems ability to remove the heat generated in the circuit from the junction regions to the ambient or equivalent heat sink. The basic formula for converting calculated power dissipation to estimated junction temperature is:

$$T_J = T_A + P_D (\theta_{JC} + \theta_{CA})$$

or

$$T_J = T_A + P_D (\theta_{JA})$$

where

T_A = ambient temperature

P_D = calculated power dissipation

θ_{JC} = thermal resistance, junction to case

θ_{CA} = thermal resistance, case to ambient

θ_{JA} = thermal resistance, junction to ambient.

The worst-case rated thermal resistance values for Motorola's integrated circuit packages are found in Table 1. Figures 22, 23, and 24 are variations of the same derating curve. Figure 22, for instance, plots the maximum permissible package power handling capability as a function of ambient temperature when the maximum permissible junction is at 150°C (plastic package) and 175°C (ceramic flat package). Figure 23 plots worst-case junction temperature as a function of power dissipated for the two ambient temperatures, 75°C and 125°C. Figure 24 plots the junction temperature as a function of power drain when the case temperature is held constant. These figures have been developed using the worst-case thermal resistance values found in Table 1.

FIGURE 22 - AMBIENT TEMPERATURE DERATING CURVE

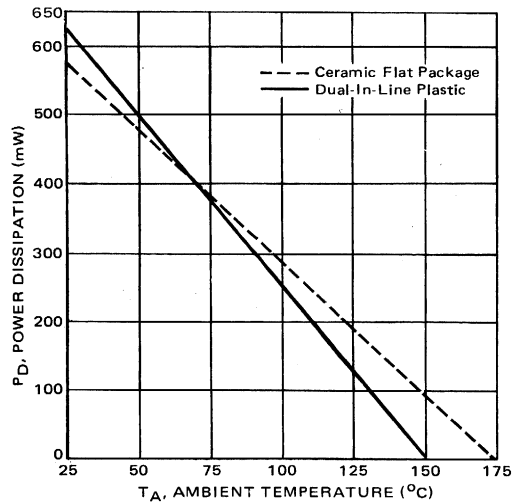


FIGURE 23 - JUNCTION TEMPERATURE DERATING CURVE USING AMBIENT TEMPERATURE

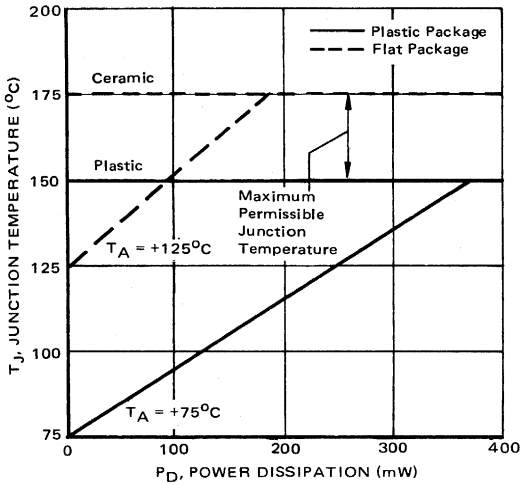


FIGURE 24 - JUNCTION TEMPERATURE DERATING CURVE USING CASE TEMPERATURE

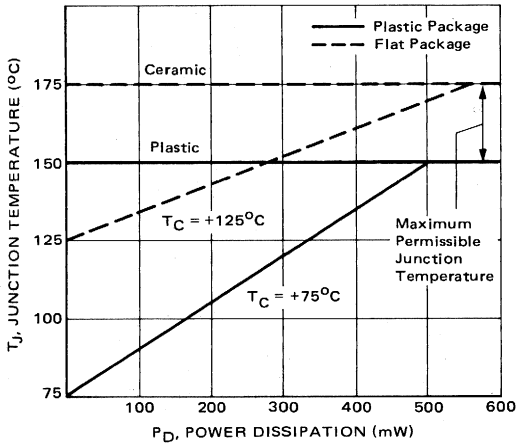


TABLE 1 - WORST-CASE THERMAL RESISTANCE OF INTEGRATED CIRCUIT PACKAGES

PACKAGE	θ_{JA} JUNCTION TO AMBIENT	θ_{JC} JUNCTION TO CASE
Ceramic Flat Package 14 lead 1/4 x 1/4 inch	0.26°C/mW	0.090°C/mW
Plastic 14 lead dual-in-line	0.20°C/mW	0.15°C/mW

MAXIMUM RATINGS

Characteristic	Symbol	Rating	Unit
----------------	--------	--------	------

Ratings above which device life may be impaired:



Power Supply Voltage ($V_{CC}=0$)	V_{EE}	-10	Vdc
Input Voltage ($V_{CC}=0$)	V_{in}	0 to V_{EE}	Vdc
Output Source Current	I_O	20	mAdc
Storage Temperature Range	MC1000 MC1200	T_{stg}	-55 to +125 -65 to +175

Recommended maximum ratings above which performance may be degraded:

Operating Temperature Range	MC1000 MC1200	T_A	0 to +75 -55 to +125
AC Fan-In (Expandable Gates)	m	20	—
AC Fan-Out* (Gates and Flip-Flops)	n	15	—

*Although a minimum dc fan-out of 25 is guaranteed in each electrical specification, it is recommended that the maximum ac fan-out of 15 be used for high-speed operation.


PACKAGING

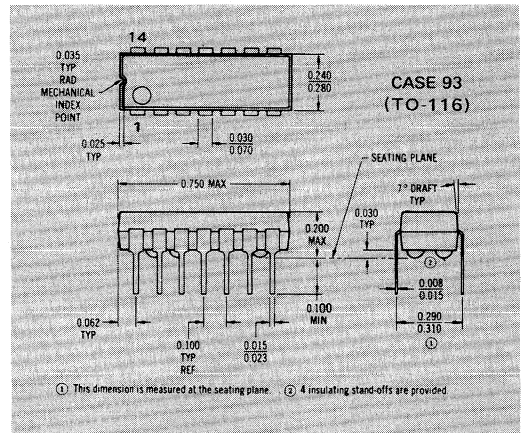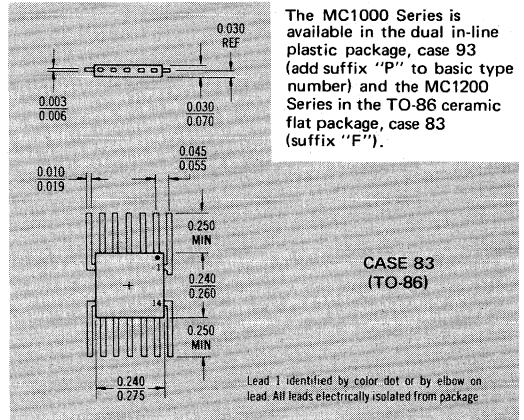


MC1001 thru MC1003 MC1201 thru MC1203

Provide simultaneous OR/NOR or AND/NAND output functions. These devices contain an internal bias reference insuring that the threshold point is always in the center of the transition region over the temperature range.


Emitter follower output configurations differ for these three circuits as shown in the circuit schematic.

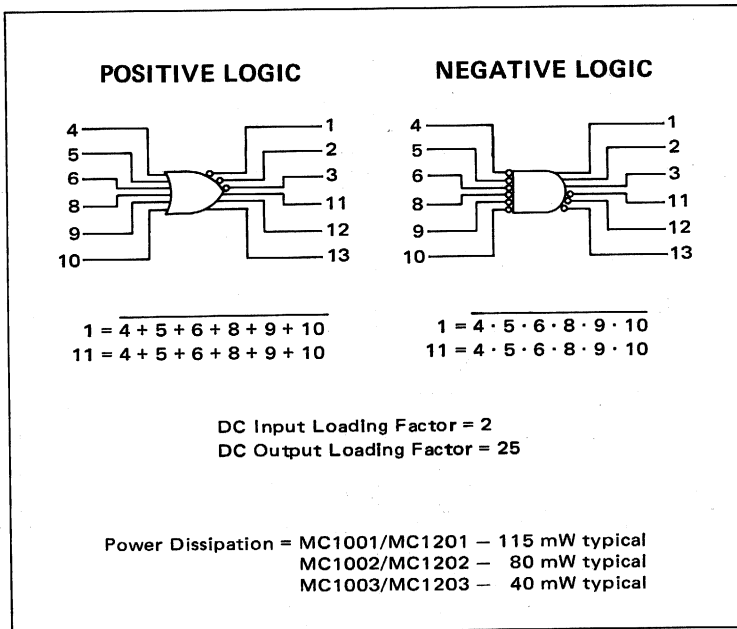

MC1001/MC1201 CIRCUIT SCHEMATIC

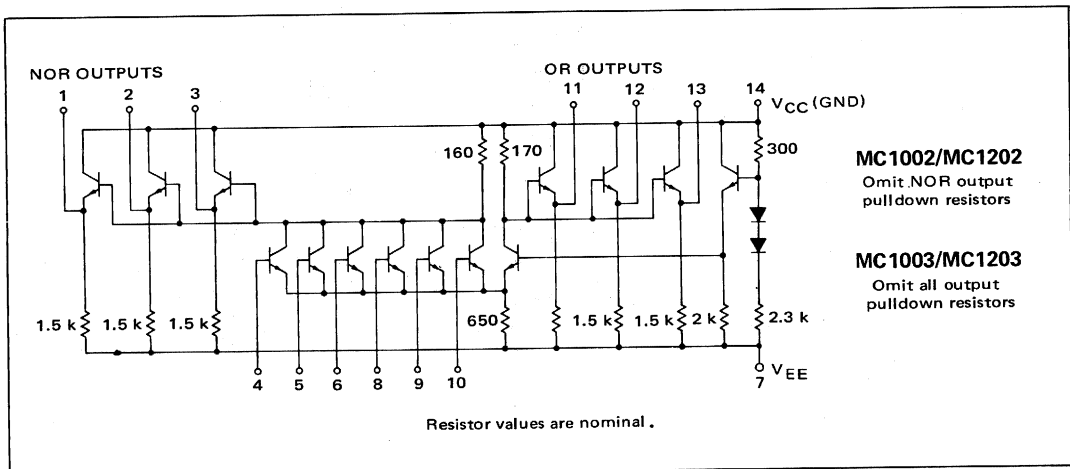

MC1001 thru MC1003, MC1201 thru MC1203 (continued)



ELECTRICAL CHARACTERISTICS

Outputs without pull-down resistors are tested with a 1.5 kΩ resistor to V_{EE}.

Characteristic	Symbol	Pin Under Test	MC1201-1203 Test Limits							MC1001-1003 Test Limits							
			-55°C		+25°C		+125°C		Unit	0°C		+25°C		+75°C		Unit	
			Min	Max	Min	Max	Min	Max		Min	Max	Min	Max	Min	Max		
Power Supply Drain Current MC1201/MC1001 MC1202/MC1002 MC1203/MC1003	I _E	7	-	-	-	32	-	-	mA _{dc}	-	-	-	32	-	-	mA _{dc}	
Input Current	I _{in}	4	-	-	-	200	-	-	μA _{dc}	-	-	-	200	-	-	μA _{dc}	
		5	-	-	-	-	-	-	-	-	-	-	-	-	-		
		6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
		8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
		9	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Input Leakage Current	I _R	Inputs*	-	-	-	0.2	-	1.0	μA _{dc}	-	-	-	0.2	-	1.0	μA _{dc}	
"NOR" Logical "1" Output Voltage	V _{OH} †	1, 2, 3†	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	V _{dc}	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	V _{dc}	
"NOR" Logical "0" Output Voltage	V _{OL}	1, 2, 3†	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	V _{dc}	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	V _{dc}	
"OR" Logical "1" Output Voltage‡	V _{OH} ‡	11, 12, 13†	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	V _{dc}	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	V _{dc}	
"OR" Logical "0" Output Voltage	V _{OL}	11, 12, 13†	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	V _{dc}	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	V _{dc}	
Switching Times Propagation Delay (Fan-Out = 3)	t ₄₊₁₋ t ₄₋₁₊ t ₄₊₁₁₊ t ₄₋₁₁₋	1	4.0	7.5	4.0	7.0	6.0	9.0	ns	4.0	7.0	4.0	7.0	5.0	8.0	ns	
		11	-	-	-	-	5.0	9.0	-	-	-	-	-	-	-	-	
		11	-	-	-	-	6.0	9.0	-	-	-	-	-	-	-	-	
		11	-	-	-	-	6.0	9.0	-	-	-	-	-	-	-	-	
	(Fan-Out = 15)	t ₄₊₁₋	1	18	-	18	-	22	-	-	18	-	18	-	20	-	-
		t ₄₋₁₊	1	6.0	-	6.0	-	8.0	-	-	6.0	-	6.0	-	7.0	-	-
		t ₄₊₁₁₊	11	4.0	-	4.0	-	6.0	-	-	4.0	-	4.0	-	5.0	-	-
		t ₄₋₁₁₋	11	13	-	13	-	17	-	-	13	-	13	-	15	-	-
Rise Time (Fan-Out = 3)	t ₁₊	1	5.0	8.0	5.0	7.5	6.0	9.0	-	5.0	7.5	5.0	7.5	5.5	8.0	-	
	t ₁₁₊	11	4.0	7.0	4.0	6.5	5.0	8.0	-	4.0	6.5	4.0	6.5	4.5	7.0	-	
Fall Time (Fan-Out = 3)	t ₁₋	1	6.0	8.5	6.0	8.0	7.0	10	-	6.0	8.0	6.0	8.0	6.5	9.0	-	
	t ₁₁₋	11	6.0	8.0	6.0	8.0	7.0	10	-	6.0	8.0	6.0	8.0	6.5	9.0	-	

* Individually test each input using the pin connections shown.

† Individually test each output listed using the pin connections shown.


‡ V_{OH} limits apply from no load (0 mA) to full load (-2.5 mA). I_L applied to output under test.

@Test Temperature
 MC1201-1203 {
 -55°C
 +25°C
 +125°C
 MC1001-1003 {
 0°C
 +25°C
 +75°C

			TEST VOLTAGE/CURRENT VALUES					
			Vdc ±1.0%				mAdc	
			V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L	
			-5.2 to -1.405	-1.165 to -0.825	-	-5.2	-2.5	
			-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5	
			-5.2 to -1.205	-0.875 to -0.530	-	-5.2	-2.5	
			-5.2 to -1.350	-1.070 to -0.740	-	-5.2	-2.5	
			-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5	
			-5.2 to -1.260	-0.950 to -0.615	-	-5.2	-2.5	
			TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:					
Characteristic	Symbol	Pin Under Test	V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L	V _{CC} (Gnd)
Power Supply Drain Current MC1201/MC1001 MC1202/MC1002 MC1203/MC1003	I _E	7 ↓	-	-	-	4, 5, 6, 7, 8, 9, 10 ↓	-	14 ↓
Input Current	I _{in}	4 5 6 8 9 10	-	-	4 5 6 8 9 10	5, 6, 7, 8, 9, 10 4, 6, 7, 8, 9, 10 4, 5, 7, 8, 9, 10 4, 5, 6, 7, 9, 10 4, 5, 6, 7, 8, 10 4, 5, 6, 7, 8, 9	-	14 ↓
Input Leakage Current	I _R	Inputs*	-	-	-	4, 5, 6, 7, 8, 9, 10	-	14
'NOR' Logical '1' Output Voltage	V _{OH} ‡	1, 2, 3† ↓	4 5 6 8 9 10	-	-	5, 6, 7, 8, 9, 10 4, 6, 7, 8, 9, 10 4, 5, 7, 8, 9, 10 4, 5, 6, 7, 9, 10 4, 5, 6, 7, 8, 10 4, 5, 6, 7, 8, 9	‡	14 ↓
'NOR' Logical '0' Output Voltage	V _{OL}	1, 2, 3† ↓	-	4 5 6 8 9 10	-	5, 6, 7, 8, 9, 10 4, 6, 7, 8, 9, 10 4, 5, 7, 8, 9, 10 4, 5, 6, 7, 9, 10 4, 5, 6, 7, 8, 10 4, 5, 6, 7, 8, 9	-	14 ↓
'OR' Logical '1' Output Voltage†	V _{OH} ‡	11, 12, 13† ↓	-	4 5 6 8 9 10	-	5, 6, 7, 8, 9, 10 4, 6, 7, 8, 9, 10 4, 5, 7, 8, 9, 10 4, 5, 6, 7, 9, 10 4, 5, 6, 7, 8, 10 4, 5, 6, 7, 8, 9	‡	14 ↓
'OR' Logical '0' Output Voltage	V _{OL}	11, 12, 13† ↓	4 5 6 8 9 10	-	-	5, 6, 7, 8, 9, 10 4, 6, 7, 8, 9, 10 4, 5, 7, 8, 9, 10 4, 5, 6, 7, 9, 10 4, 5, 6, 7, 8, 10 4, 5, 6, 7, 8, 9	-	14 ↓
Switching Times Propagation Delay (Fan-Out = 3)				Pulse In	Pulse Out	V _{EE} = -4.0 Vdc		(+1.2V)
	t ₄₊₁₋	1	4	1	1	5, 6, 7, 8, 9, 10	-	14
	t ₄₋₁₊	1	↓	1	1	↓	-	↓
	t ₄₊₁₁₊	11	↓	11	11	↓	-	↓
	t ₄₋₁₁₋	11	↓	11	11	↓	-	↓
(Fan-Out = 15)	t ₄₊₁₋	1	↓	1	1	↓	-	↓
	t ₄₋₁₊	1	↓	1	1	↓	-	↓
	t ₄₊₁₁₊	11	↓	11	11	↓	-	↓
	t ₄₋₁₁₋	11	↓	11	11	↓	-	↓
Rise Time (Fan-Out = 3)	t ₁₊	1	↓	1	1	↓	-	↓
	t ₁₁₊	11	↓	11	11	↓	-	↓
Fall Time (Fan-Out = 3)	t ₁₋	1	↓	1	1	↓	-	↓
	t ₁₁₋	11	↓	11	11	↓	-	↓

MC1001 thru MC1003, MC1201 thru MC1203 (continued)

SWITCHING TIME TEST CIRCUIT AND WAVEFORMS @ 25°C

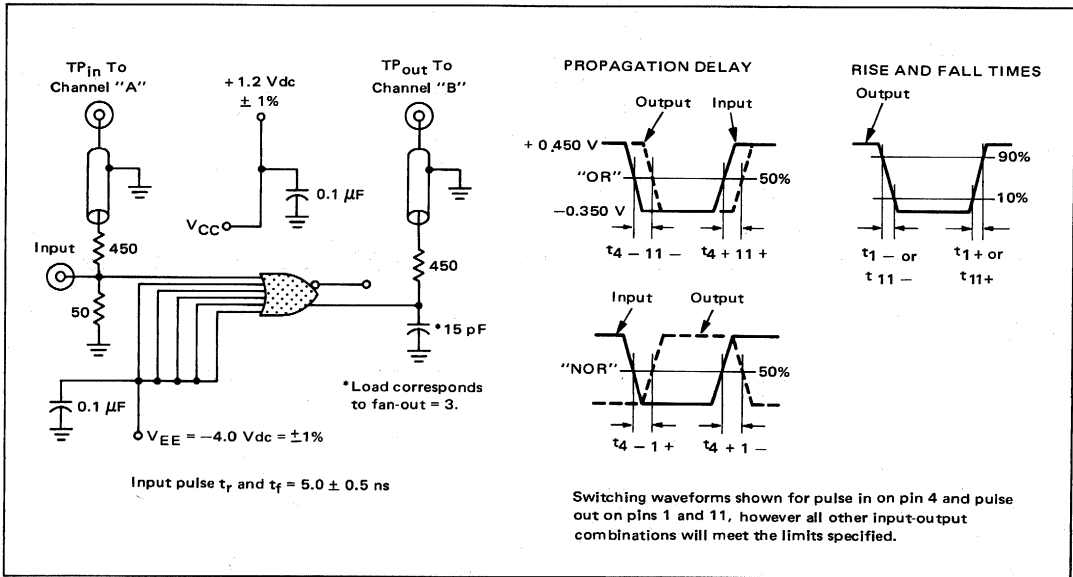

APPLICATIONS INFORMATION

The MC1001-1003/MC1201-1203 6-input OR/NOR gates are extremely useful in generating multiple wired-OR logic functions since six independent outputs are provided. (An example is shown in Figure 1.) The gate performs well as a clock driver with the multiple outputs which result in three times the normal fan-out for a given clock waveform. If twisted pair lines are being used for clock distribution in a system, the gate will drive three independent twisted pair lines, each with the same clock waveform.

An output impedance of about 2 ohms is obtained if three OR or NOR outputs are tied together. This provides an excellent 50-ohm driving capability. The 50-ohm line or coax should be terminated in its characteristic impedance to a nominal -2.0 V. This prevents excessively high output current that would pull the logic "1" level below nominal (see Figure 2).

FIGURE 1 - MECL II "WIRED OR" FEATURE


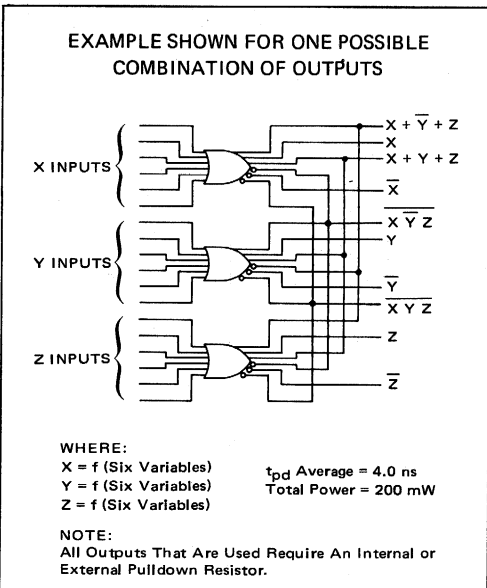


FIGURE 2 - MC1003/MC1203 AS A 50-OHM DRIVER WITH NOMINAL MECL LOGIC LEVELS

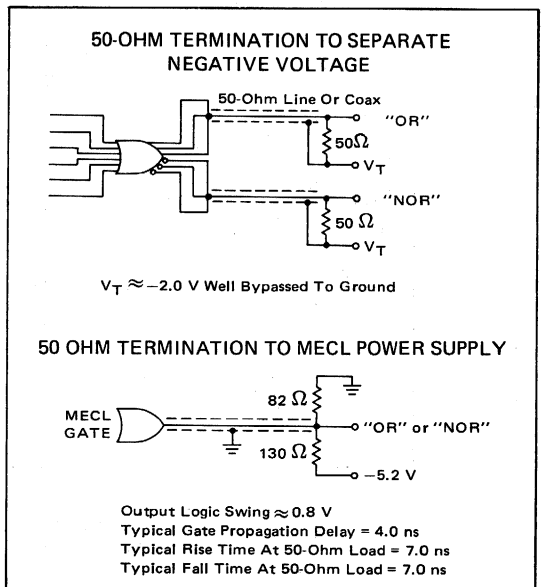


MC1024 MC1224

Provide simultaneous OR/NOR or AND/NAND output functions. These devices contain an internal bias reference insuring that the threshold point is always in the center of the transition region over the temperature range.

Expandable inputs are available on pins 1, 4 and 10, 13 as shown in the circuit schematic.


POSITIVE LOGIC



$$5 = \overline{2 + 3}$$

$$6 = 2 + 3$$

NEGATIVE LOGIC




$$5 = \overline{2 \cdot 3}$$

$$6 = 2 \cdot 3$$

DC Input Loading Factor = 1
DC Output Loading Factor = 25
Power Dissipation = 95 mW typical


CIRCUIT SCHEMATIC

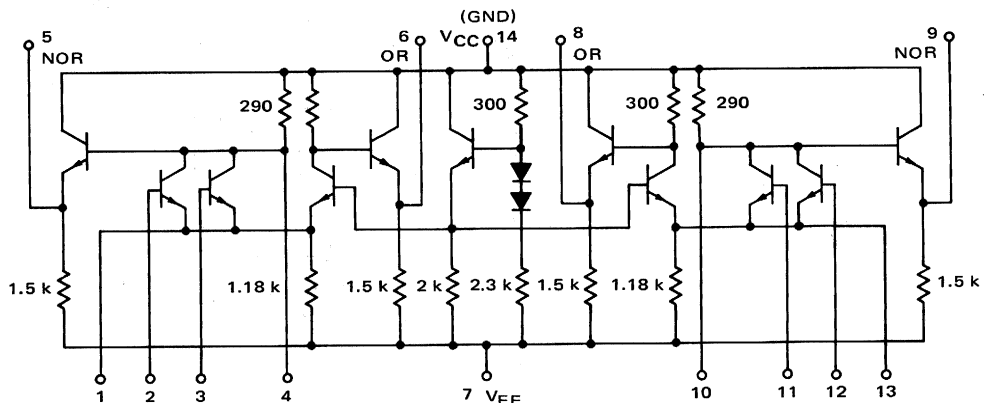

Resistor values are nominal.

MC1024, MC1224 (continued)

ELECTRICAL CHARACTERISTICS




Test procedures are shown for only one gate. The other gate is tested in the same manner.

Characteristic	Symbol	Pin Under Test	MC1224 Test Limits								MC1024 Test Limits							
			-55°C		+25°C		+125°C		Unit	0°C		+25°C		+75°C		Unit		
			Min	Max	Min	Max	Min	Max		Min	Max	Min	Max	Min	Max			
Power Supply Drain Current	I_E	7	-	-	-	26	-	-	-	mAdc	-	-	-	26	-	-	mAdc	
Input Current	I_{in}	2 3	-	-	-	100	-	-	-	μ Adc	-	-	-	100	-	-	μ Adc	
Input Leakage Current	I_R	Inputs*	-	-	-	0.2	-	1.0	-	μ Adc	-	-	-	0.2	-	1.0	μ Adc	
"NOR" Logical "1" Output Voltage \ddagger	$V_{OH\ddagger}$	5 5	-0.990 -0.990	-0.825 -0.825	-0.850 -0.850	-0.700 -0.700	-0.700 -0.700	-0.530 -0.530	Vdc	-0.895 -0.895	-0.740 -0.740	-0.850 -0.850	-0.700 -0.700	-0.775 -0.775	-0.615 -0.615	Vdc		
"NOR" Logical "0" Output Voltage	V_{OL}	5 5	-1.890 -1.890	-1.580 -1.580	-1.800 -1.800	-1.500 -1.500	-1.720 -1.720	-1.380 -1.380	Vdc	-1.830 -1.830	-1.525 -1.525	-1.800 -1.800	-1.500 -1.500	-1.760 -1.760	-1.435 -1.435	Vdc		
"OR" Logical "1" Output Voltage \ddagger	$V_{OH\ddagger}$	6 6	-0.990 -0.990	-0.825 -0.825	-0.850 -0.850	-0.700 -0.700	-0.700 -0.700	-0.530 -0.530	Vdc	-0.895 -0.895	-0.740 -0.740	-0.850 -0.850	-0.700 -0.700	-0.775 -0.775	-0.615 -0.615	Vdc		
"OR" Logical "0" Output Voltage	V_{OL}	6 6	-1.890 -1.890	-1.580 -1.580	-1.800 -1.800	-1.500 -1.500	-1.720 -1.720	-1.380 -1.380	Vdc	-1.830 -1.830	-1.525 -1.525	-1.800 -1.800	-1.500 -1.500	-1.760 -1.760	-1.435 -1.435	Vdc		
Switching Times Propagation Delay (Fan-Out = 3)	t_{2+5-} t_{2-5+} t_{2+6+} t_{2-6-} t_{2+5-} t_{2-5+} t_{2+6+} t_{2-6-}	5 5 6 6 5 5 6 6	Typ	Max	Typ	Max	Typ	Max	ns	Typ	Max	Typ	Max	Typ	Max	ns		
			5.0	7.0	5.0	7.0	6.5	9.0		5.0	7.0	5.0	7.0	6.0	8.0			
			4.0	7.5	4.0	7.5	5.5	9.0		4.0	7.5	4.0	7.5	5.0	8.5			
			4.0	7.5	4.0	7.0	5.5	8.5		4.0	7.0	4.0	7.0	5.0	8.0			
			4.0	7.0	4.0	7.0	5.5	9.0		4.0	7.0	4.0	7.0	5.0	8.0			
			14	-	14	-	18	-		14	-	14	-	16	-			
			5.0	-	5.0	-	7.0	-		5.0	-	5.0	-	6.0	-			
			6.0	-	6.0	-	8.0	-		6.0	-	6.0	-	7.0	-			
			13	-	13	-	17	-		13	-	13	-	15	-			
			5.0	7.5	5.0	7.5	6.0	9.0		5.0	7.5	5.0	7.5	5.0	8.0			
			4.0	7.0	4.0	6.5	5.5	8.0		4.0	6.5	4.0	6.5	5.0	7.0			
			Rise Time (Fan-Out = 3)	t_{5+}	5	5.0	7.5	5.0		7.5	6.0	9.0	5.0	7.5	5.0		7.5	5.0
t_{6+}	6	4.0		7.0	4.0	6.5	5.5	8.0	4.0	6.5	4.0	6.5	5.0	7.0				
Fall Time (Fan-Out = 3)	t_{5-}	5	5.0	8.5	5.0	8.0	6.0	10	5.0	8.0	5.0	8.0	5.5	9.0				
	t_{6-}	6	5.0	8.0	5.0	8.0	7.0	10	5.0	8.0	5.0	8.0	6.0	9.0				

* Individually test each input using the pin connections shown.

$\ddagger V_{OH}$ limits apply from no load (0 mA) to full load (-2.5 mA).


SWITCHING TIME TEST CIRCUIT @ 25°C

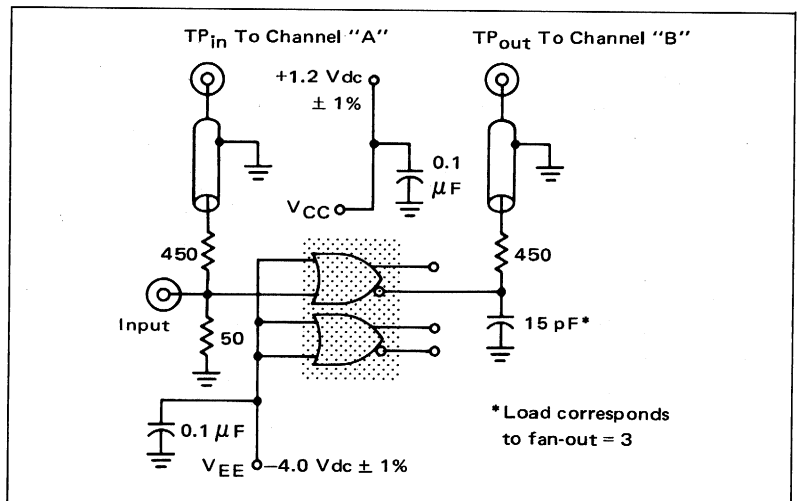

@Test Temperature
 MC1224 { -55°C
 +25°C
 +125°C
 MC1024 { 0°C
 +25°C
 +75°C

TEST VOLTAGE/CURRENT VALUES						
V _{dc} ±1.0%					mAdc	
V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L		
-5.2 to -1.405	-1.165 to -0.825	-	-5.2	-2.5		
-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5		
-5.2 to -1.205	-0.875 to -0.530	-	-5.2	-2.5		
-5.2 to -1.350	-1.070 to -0.740	-	-5.2	-2.5		
-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5		
-5.2 to -1.260	-0.950 to -0.615	-	-5.2	-2.5		

TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:										
Characteristic	Symbol	Pin Under Test	V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L	V _{CC} (Gnd)		
Power Supply Drain Current	I _E	7	-	-	-	2, 3, 7, 11, 12	-	14		
Input Current	I _{in}	2 3	-	-	2	3, 7, 11, 12	-	14		
			-	-	3	2, 7, 11, 12	-	14		
Input Leakage Current	I _R	Inputs*	-	-	-	2, 3, 7, 11, 12	-	14		
"NOR" Logical "1" Output Voltage _†	V _{OH} †	5 5	2	-	-	3, 7, 11, 12	5	14		
			3	-	-	2, 7, 11, 12	5	14		
"NOR" Logical "0" Output Voltage	V _{OL}	5 5	-	2	-	3, 7, 11, 12	-	14		
			-	3	-	2, 7, 11, 12	-	14		
"OR" Logical "1" Output Voltage _‡	V _{OH} ‡	6 6	-	2	-	3, 7, 11, 12	6	14		
			-	3	-	2, 7, 11, 12	6	14		
"OR" Logical "0" Output Voltage	V _{OL}	6 6	2	-	-	3, 7, 11, 12	-	14		
			3	-	-	2, 7, 11, 12	-	14		
Switching Times Propagation Delay (Fan-Out = 3)			Pulse In		Pulse Out		V _{EE} = -4.0 Vdc		(+12 V)	
			t ₂₊₅₋	2	5	-	3, 7, 11, 12	-	14	
			t ₂₋₅₊	2	5	-	3, 7, 11, 12	-	14	
			t ₂₊₆₊	2	6	-	3, 7, 11, 12	-	14	
			t ₂₋₆₋	2	6	-	3, 7, 11, 12	-	14	
			(Fan-Out = 15)	t ₂₊₅₋	2	5	-	3, 7, 11, 12	-	14
				t ₂₋₅₊	2	5	-	3, 7, 11, 12	-	14
				t ₂₊₆₊	2	6	-	3, 7, 11, 12	-	14
				t ₂₋₆₋	2	6	-	3, 7, 11, 12	-	14
			Rise Time (Fan-Out = 3)	t ₅₊	5	5	-	3, 7, 11, 12	-	14
t ₆₊	6	6		-	3, 7, 11, 12	-	14			
Fall Time (Fan-Out = 3)	t ₅₋	5	5	-	3, 7, 11, 12	-	14			
	t ₆₋	6	6	-	3, 7, 11, 12	-	14			

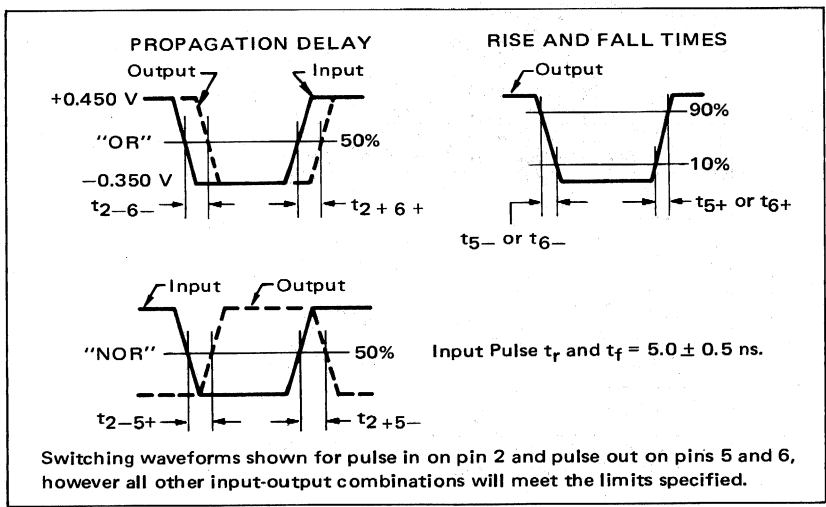


SWITCHING TIME WAVEFORMS

APPLICATIONS INFORMATION

The MC1024/MC1224 dual 2-input expandable OR/NOR gate provides the capability of increasing fan-in by making available the collector and emitter nodes of the standard gate. Note that complementary outputs are available, lending to circuit flexibility. By using the MC1025/MC1225 expander 6, 7, 10, 11, 12, 15, 16, or 20 gate inputs may be obtained with one or two expanders per gate. Note that as fan-in is increased, capacitance is added to the input collector node and propagation delays through the gate will increase. A maximum fan-in of 20 is recommended for high-speed operation. If high speed is not required, larger fan-ins may be utilized.

The expandable inputs allow a large fan-in NOR or NAND gate to be obtained, where power dissipation is decreased at the expense of propagation delay. The OR propagation delay times vary little with increasing fan-in since capacitance is not being added to the OR collector node. At a fan-in of 20, NOR output rise and fall times approach 20 ns, while OR output rise and fall times remain about 4.0 ns. For minimal added capacitance at the NOR collector node, lead lengths should be kept short and the circuits wired in directly rather than using sockets. Typical propagation delay curves versus fan-in and temperature are shown below.

TYPICAL PROPAGATION DELAY TIMES

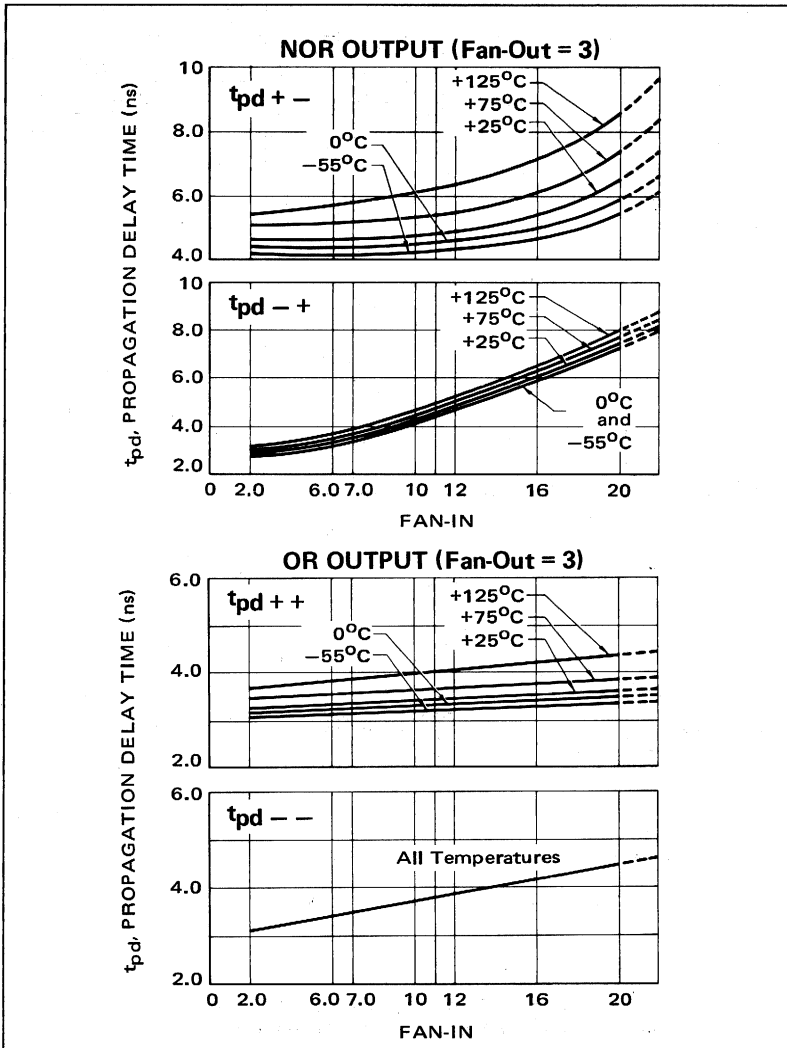


MC1025
MC1225


Dual expander arrays, with a 4-transistor array isolated from a 5-transistor array. The collectors and emitters from both arrays may be connected to form a 9-transistor array. With each base available, a 4, 5, or 9-input expander may be obtained.

Designed specifically for use with MC1024/MC1224 Dual 2-Input Gates.

POSITIVE LOGIC




NEGATIVE LOGIC



DC Input Loading Factor = 1


CIRCUIT SCHEMATIC

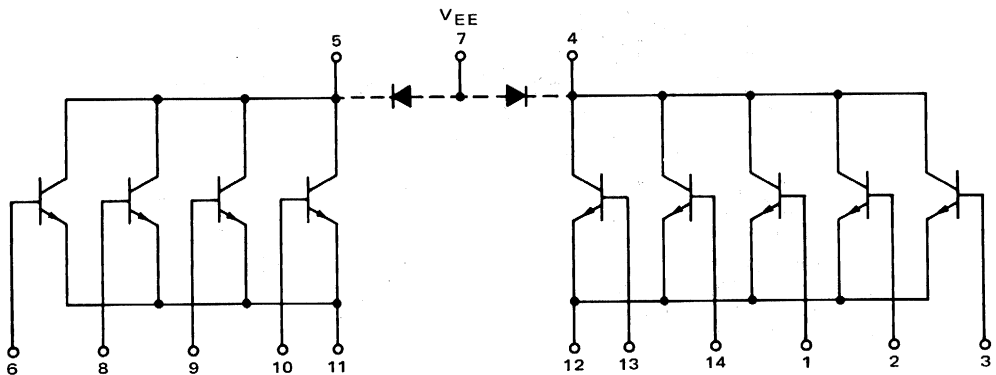

MC1025, MC1225 (continued)

ELECTRICAL CHARACTERISTICS

Test procedures are shown for only one expander.
The other expander is tested in the same manner.




@ All
Temperatures

Characteristic	Symbol	Pin Under Test	MC1225 Test Limits						MC1025 Test Limits						TEST VOLTAGE/CURRENT VALUES								
			-55°C		+25°C		+125°C		0°C		+25°C		+75°C		Vdc ± 1.0%			mAdc					
			Min	Max	Min	Max	Min	Max	Unit	Min	Max	Min	Max	Min	Max	Unit	V _{EE}	V _{CC}	V _{BB}	V _{CB}	V _{BE}	I _E	
Base Leakage Current	I _{BL}	1, 2, 3, 13, 14	-	0.5	-	0.5	-	2.0	μAdc	-	0.5	-	0.5	-	2.0	μAdc	11, 12	-	1, 2, 3, 13, 14	-	-	-	4, 5, 7
Collector Leakage Current	I _{CEX}	1, 2, 3, 13, 14	-	1.0	-	1.0	-	100	μAdc	-	1.0	-	1.0	-	15.0	μAdc	-	4, 5, 7	-	-	1, 2, 3, 13, 14	-	11, 12
Input Voltage	V _{BE}	12	-0.860	-0.910	-0.710	-0.760	-0.520	-0.570	Vdc	-0.760	-0.810	-0.710	-0.760	-0.610	-0.660	Vdc	-	-	-	4, 5	-	12	1, 2, 3, 13, 14

APPLICATIONS INFORMATION

The MC1025/MC1225 dual 4-5 input expander is designed to work with the MC1024/MC1224 expandable gate. The transistors are manufactured with the same buried layer process used on all MECL II devices and are typical of MECL II gate transistors. BV_{CEO} is 12 V or greater, f_T ≈ 600 MHz, and β is typically from 100 to 150. An example of two 20-input NOR gates and a 40-input OR gate made from an MC1024/MC1224 expandable gate and four MC1025/MC1225 expanders is shown.


Two 20-input NOR gates and one 40-input OR gate generated using one MC1024/MC1224 expandable gate and four MC1025/MC1225 expanders.

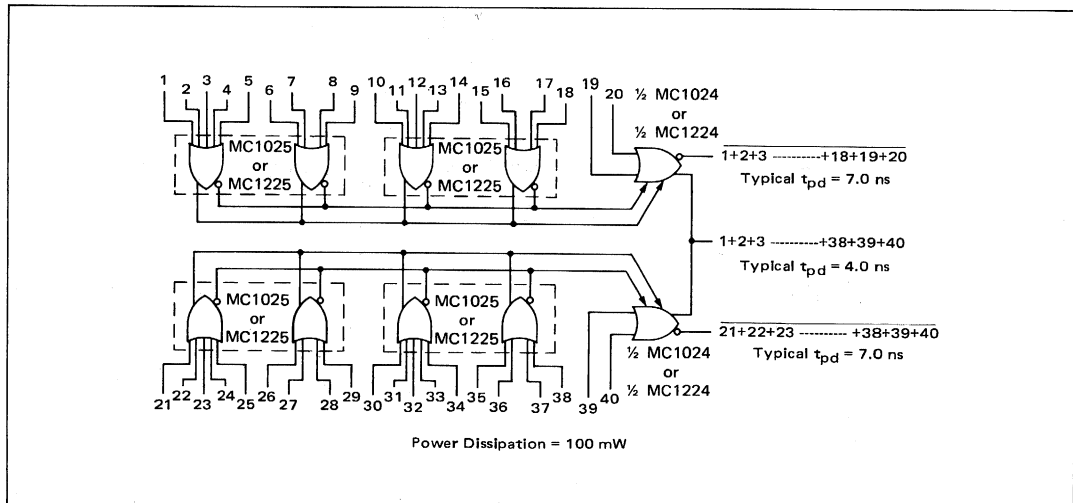


MC1004 thru MC1006 MC1204 thru MC1206

Provide simultaneous OR/NOR or AND/NAND output functions. These devices contain an internal bias reference insuring that the threshold point is always in the center of the transition region over the temperature range.

Emitter follower output configurations differ for these three circuits as shown in the circuit schematic.

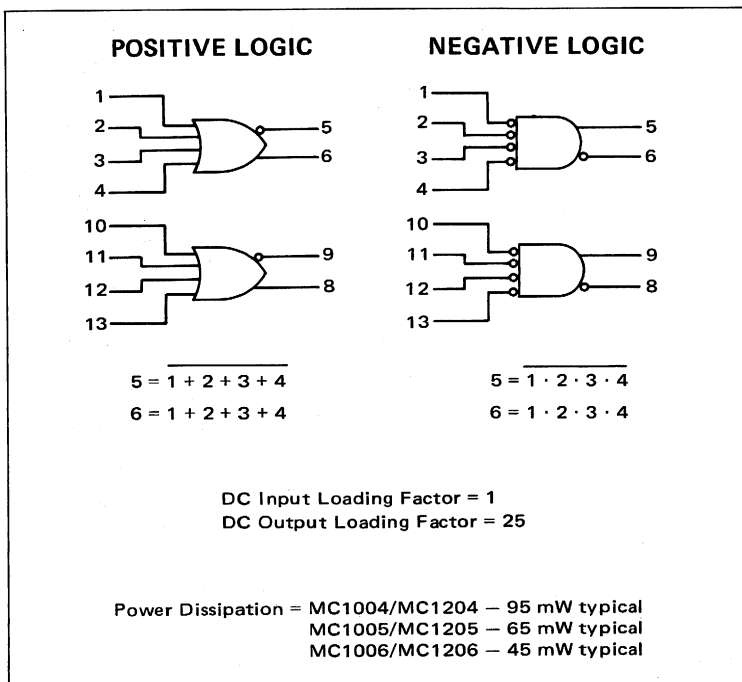


MC1004/MC1204 CIRCUIT SCHEMATIC

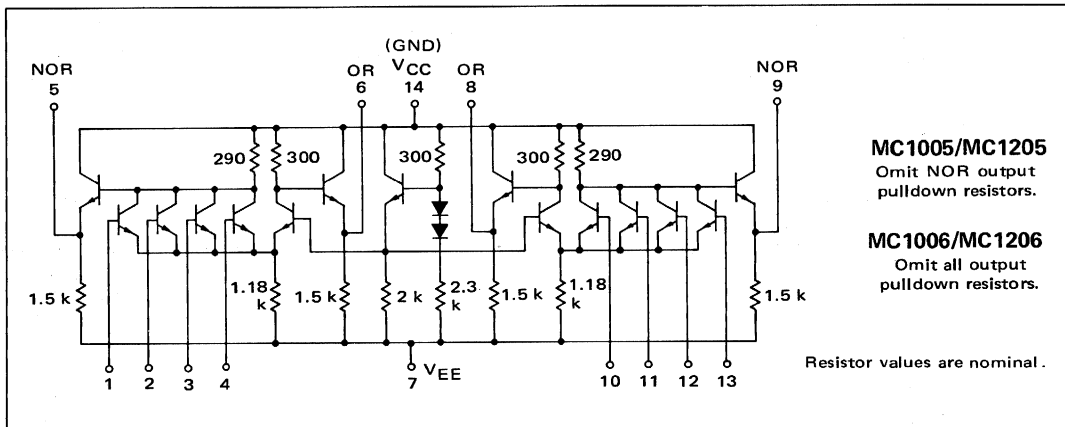

MC1004 thru MC1006, MC1204 thru MC1206 (continued)

ELECTRICAL CHARACTERISTICS

Test procedures are shown for only one gate. The other gate is tested in the same manner. Outputs without pulldown resistors are tested with a 1.5 kΩ resistor to V_{EE}.



Characteristic	Symbol	Pin Under Test	MC1204-1206 Test Limits								MC1004-1006 Test Limits							
			-55°C		+25°C		+125°C		Unit	0°C		+25°C		+75°C		Unit		
			Min	Max	Min	Max	Min	Max		Min	Max	Min	Max	Min	Max			
Power Supply Drain Current MC1204/MC1004 MC1205/MC1005 MC1206/MC1006	I _E	7 ↓	-	-	-	26	-	-	mA _{Dc}	-	-	-	26	-	-	mA _{Dc}		
Input Current	I _{in}	1 2 3 4	-	-	-	100	-	-	μA _{Dc}	-	-	-	100	-	-	μA _{Dc}		
Input Leakage Current	I _R	Inputs*	-	-	-	0.2	-	1.0	μA _{Dc}	-	-	-	0.2	-	1.0	μA _{Dc}		
"NOR" Logical "1" Output Voltage†	V _{OH} ‡	5 ↓	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	V _{Dc}	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	V _{Dc}		
"NOR" Logical "0" Output Voltage	V _{OL}	5 ↓	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	V _{Dc}	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	V _{Dc}		
"OR" Logical "1" Output Voltage‡	V _{OH} ‡	6 ↓	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	V _{Dc}	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	V _{Dc}		
"OR" Logical "0" Output Voltage	V _{OL}	6 ↓	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	V _{Dc}	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	V _{Dc}		
Switching Times Propagation Delay (Fan-Out = 3)	t ₁₊₅₋	5	Typ	5.0	7.0	5.0	7.0	6.5	9.0	ns	Typ	5.0	7.0	5.0	7.0	6.0	8.0	
			Max	4.0	7.5	4.0	7.5	5.5	9.0		4.0	7.5	4.0	7.5	5.0	8.5		
	t ₁₋₅₊	5	Typ	4.0	7.5	4.0	7.0	5.5	8.5	ns	Typ	4.0	7.0	4.0	7.0	5.0	8.0	
			Max	4.0	7.0	4.0	7.0	5.5	9.0		4.0	7.0	4.0	7.0	5.0	8.0		
	(Fan-Out = 15)	t ₁₊₅₋	5	Typ	14	-	14	-	18	-	ns	Typ	14	-	14	-	16	-
				Max	5.0	-	5.0	-	7.0	-		5.0	-	5.0	-	6.0	-	
	t ₁₋₅₊	5	Typ	6.0	-	6.0	-	8.0	-	ns	Typ	6.0	-	6.0	-	7.0	-	
			Max	6.0	-	6.0	-	8.0	-		6.0	-	6.0	-	7.0	-		
	t ₁₊₆₊	6	Typ	13	-	13	-	17	-	ns	Typ	13	-	13	-	15	-	
			Max	13	-	13	-	17	-		13	-	13	-	15	-		
Rise Time (Fan-Out = 3)	t ₅₊	5	Typ	5.0	7.5	5.0	7.5	6.0	9.0	ns	Typ	5.0	7.5	5.0	7.5	5.0	8.0	
			Max	4.0	7.0	4.0	6.5	5.5	8.0		4.0	6.5	4.0	6.5	5.0	7.0		
Fall Time (Fan-Out = 3)	t ₆₊	6	Typ	5.0	8.5	5.0	8.0	6.0	10	ns	Typ	5.0	8.0	5.0	8.0	5.5	9.0	
			Max	5.0	8.0	5.0	8.0	7.0	10		5.0	8.0	5.0	8.0	6.0	9.0		


* Individually test each input using the pin connections shown. † V_{OH} limits apply from no load (0 mA) to full load (-2.5 mA).

MC1204-1206 } @Test
 Temperature
 -55°C
 +25°C
 +125°C
 MC1004-1006 } 0°C
 +25°C
 +75°C

TEST VOLTAGE/CURRENT VALUES							V _{CC} (Gnd)
V _{dC} ±1.0%					mAdc		
V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L			
-5.2 to -1.405	-1.165 to -0.825	-	-5.2	-2.5			
-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5			
-5.2 to -1.205	-0.875 to -0.530	-	-5.2	-2.5			
-5.2 to -1.350	-1.070 to -0.740	-	-5.2	-2.5			
-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5			
-5.2 to -1.260	-0.950 to -0.615	-	-5.2	-2.5			
TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:							
Characteristic	Symbol	Pin Under Test	V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L
Power Supply Drain Current MC1204/MC1004 MC1205/MC1005 MC1206/MC1006	I _E	7 ↓	-	-	-	1, 2, 3, 4, 7, 10, 11, 12, 13 ↓	-
Input Current	I _{in}	1 2 3 4	-	-	1 2 3 4	2, 3, 4, 7, 10, 11, 12, 13 1, 3, 4, 7, 10, 11, 12, 13 1, 2, 4, 7, 10, 11, 12, 13 1, 2, 3, 7, 10, 11, 12, 13	-
Input Leakage Current	I _R	Inputs*	-	-	-	1, 2, 3, 4, 7, 10, 11, 12, 13	-
"NOR" Logical "1" Output Voltage†	V _{OH} †	5 ↓	1 2 3 4	-	-	2, 3, 4, 7, 10, 11, 12, 13 1, 3, 4, 7, 10, 11, 12, 13 1, 2, 4, 7, 10, 11, 12, 13 1, 2, 3, 7, 10, 11, 12, 13	5 ↓
"NOR" Logical "0" Output Voltage	V _{OL}	5 ↓	-	1 2 3 4	-	2, 3, 4, 7, 10, 11, 12, 13 1, 3, 4, 7, 10, 11, 12, 13 1, 2, 4, 7, 10, 11, 12, 13 1, 2, 3, 7, 10, 11, 12, 13	-
"OR" Logical "1" Output Voltage†	V _{OH} †	6 ↓	-	1 2 3 4	-	2, 3, 4, 7, 10, 11, 12, 13 1, 3, 4, 7, 10, 11, 12, 13 1, 2, 4, 7, 10, 11, 12, 13 1, 2, 3, 7, 10, 11, 12, 13	6 ↓
"OR" Logical "0" Output Voltage	V _{OL}	6 ↓	1 2 3 4	-	-	2, 3, 4, 7, 10, 11, 12, 13 1, 3, 4, 7, 10, 11, 12, 13 1, 2, 4, 7, 10, 11, 12, 13 1, 2, 3, 7, 10, 11, 12, 13	-
Switching Times Propagation Delay (Fan-Out = 3)	t ₁₊₅₋	5	1 ↓	5	-	V _{EE} = -4.0 Vdc 2, 3, 4, 7, 10, 11, 12, 13 ↓	-
		5					
	t ₁₋₅₊	6		6			
		6					
	(Fan-Out = 15)	t ₁₊₅₋		5			
		t ₁₋₅₊		5			
	t ₁₊₆₊	6		6			
		6					
	t ₁₋₆₋	5		5			
		6					
Rise Time (Fan-Out = 3)	t ₅₊	5					
Fall Time (Fan-Out = 3)	t ₆₊	6					
	t ₅₋	5					
t ₆₋	6						

MC1004 thru MC1006, MC1204 thru MC1206 (continued)

SWITCHING TIME TEST CIRCUIT AND WAVEFORMS @ 25°C

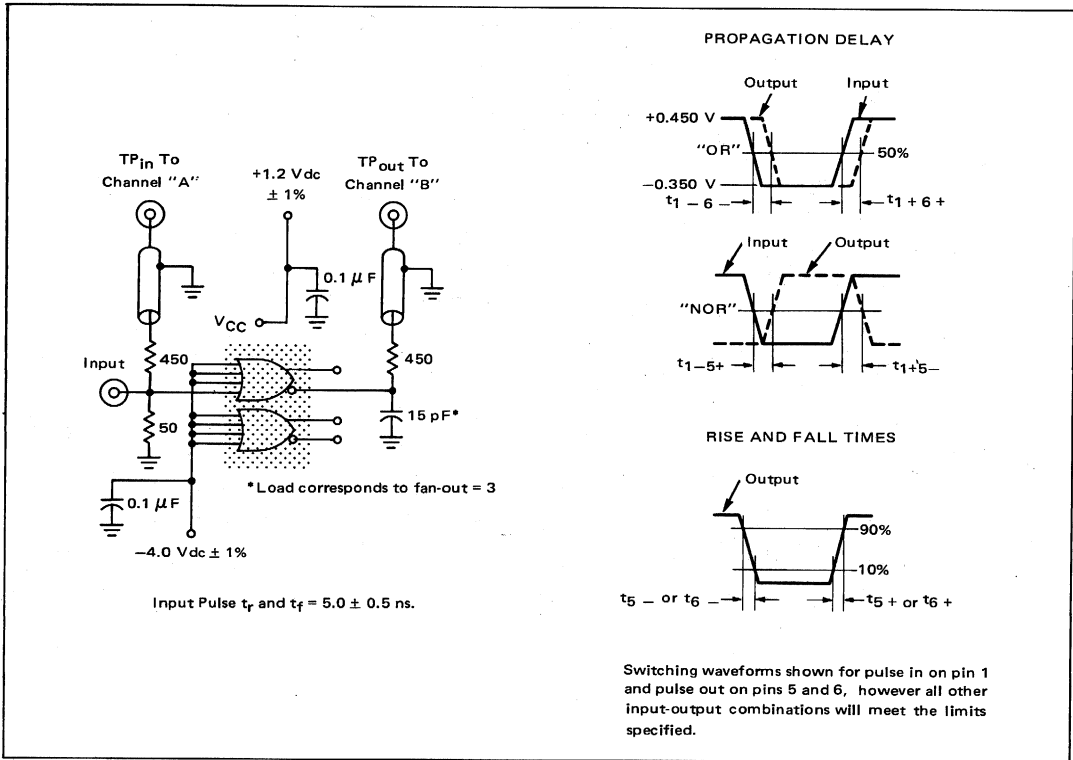


APPLICATIONS INFORMATION


The MC1004-1006/MC1204-1206 dual 4-input OR/NOR gates are very useful in generating system logic due to their flexibility. By employing negative logic on the inputs (low level of -1.6 V is considered true), the AND/NAND logic function is obtained from the basic gate. Since complementary inputs are available in MECL system, OR/NOR-AND/NAND logic may be employed, reducing the package count

in the system. An 8-input OR or AND gate is obtained by tying the OR outputs together and using positive or negative logic. The dual 4-input gate is also useful for driving two twisted pair lines where the lines must carry independent information. For a further discussion of twisted pair driving and receiving, refer to MC1020/MC1220 Line Receiver.

8-INPUT "OR" GATE (positive logic) or 8-INPUT "AND" GATE (negative logic)

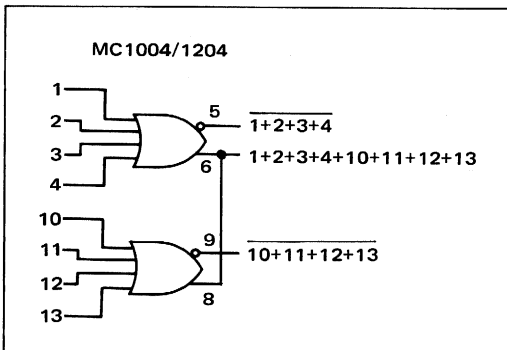


DUAL 4-INPUT GATE USED TO DRIVE TWO BALANCED TWISTED PAIR LINES

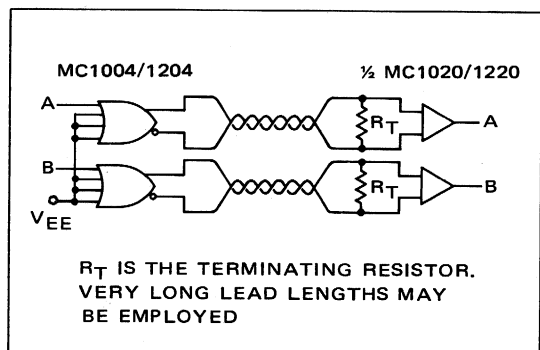


MC1007 thru MC1009 MC1207 thru MC1209

Provide the NOR output function. These devices contain an internal bias reference insuring that the threshold point is always in the center of the transition region over the temperature range.


Emitter follower output configurations differ for these three circuits as shown in the circuit schematic.

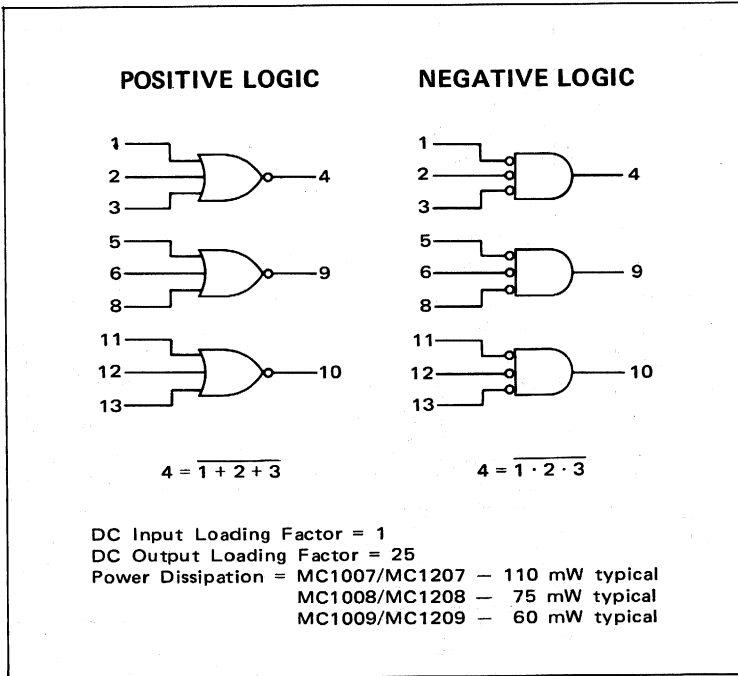

MC1007/MC1207 CIRCUIT SCHEMATIC

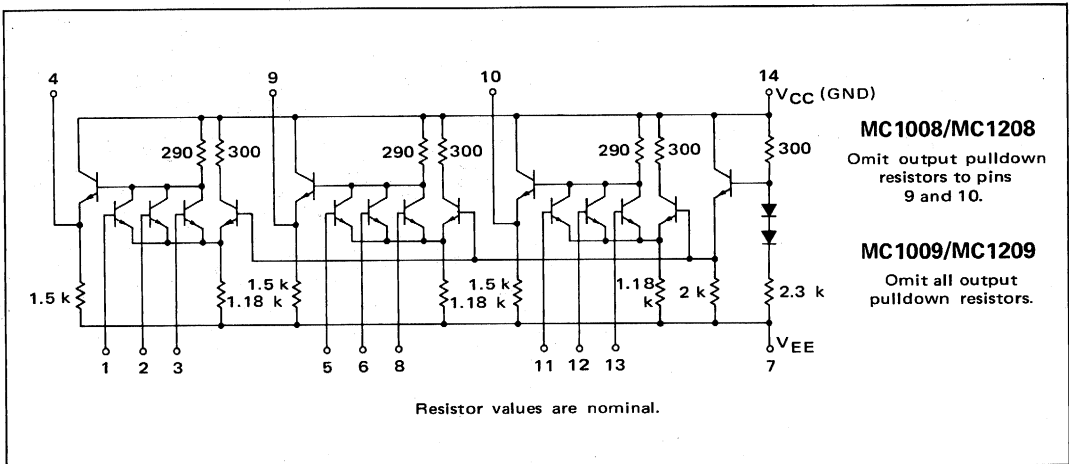

MC1007 thru MC1009, MC1207 thru MC1209 (continued)



ELECTRICAL CHARACTERISTICS


Test procedures are shown for only one gate. The other gates are tested in the same manner. Outputs without pulldown resistors are tested with a 1.5 k ohm resistor to VEE.

Characteristic	Symbol	Pin Under Test	MC1207-1209 Test Limits						MC1007-1009 Test Limits							
			-55°C		+25°C		+125°C		0°C		+25°C		+75°C		Unit	
			Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
Power Supply Drain Current MC1207/MC1007 MC1208/MC1008 MC1209/MC1009	I_E	7	-	-	-	30	-	-	mA _{Dc}	-	-	-	30	-	-	mA _{Dc}
Input Current	I_{in}	1 2 3	-	-	-	100	-	-	μA _{Dc}	-	-	-	100	-	-	μA _{Dc}
Input Leakage Current	I_R	Inputs*	-	-	-	0.2	-	1.0	μA _{Dc}	-	-	-	0.2	-	1.0	μA _{Dc}
"NOR" Logical "1" Output Voltage [†]	V_{OH}	4	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	V _{Dc}	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	V _{Dc}
"NOR" Logical "0" Output Voltage	V_{OL}	4	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	V _{Dc}	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	V _{Dc}
Switching Times Propagation Delay (Fan-Out = 3)	t_{1+4-} t_{1-4+}	4	Typ	Max	Typ	Max	Typ	Max	ns	Typ	Max	Typ	Max	Typ	Max	ns
(Fan-Out = 15)	t_{1+4-} t_{1-4+}		4.0	7.5	4.0	7.5	6.0	9.0		4.0	7.5	4.0	7.5	5.0	8.5	
Rise Time (Fan-Out = 3)	t_{4+}		4.0	7.0	4.0	7.0	6.0	9.0		4.0	7.0	4.0	7.0	5.0	8.0	
Fall Time (Fan-Out = 3)	t_{4-}		18	-	18	-	22	-		18	-	18	-	20	-	
			5.0	-	5.0	-	9.0	-		5.0	-	5.0	-	7.0	-	
			5.0	7.5	5.0	7.5	6.0	9.0		5.0	7.5	5.0	7.5	5.5	8.0	
			6.0	8.5	6.0	8.0	7.0	10		6.0	8.0	6.0	8.0	6.0	9.0	

* Individually test each input using the pin connections shown.

[†] V_{OH} limits apply from no load (0 mA) to full load (-2.5 mA).


SWITCHING TIME TEST CIRCUIT @ 25°C

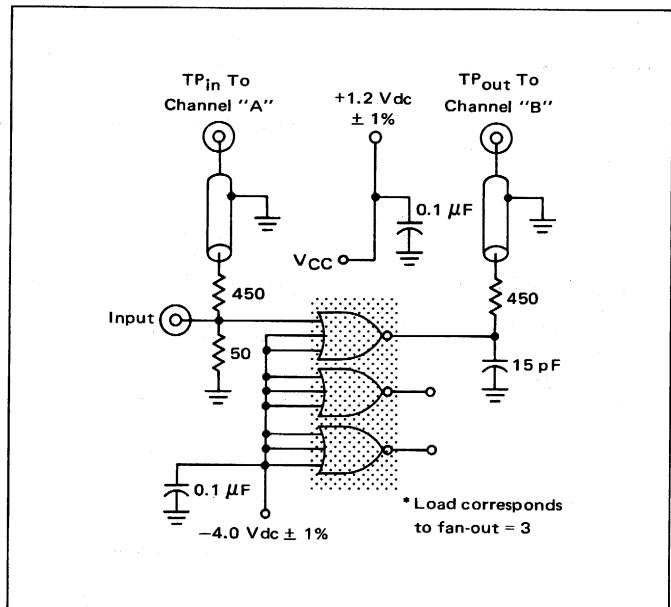


@Test Temperature
 MC1207-1209 {
 -55°C
 +25°C
 +125°C
 MC1007-1009 {
 0°C
 +25°C
 +75°C

			TEST VOLTAGE/CURRENT VALUES					
			Vdc ± 1.0%				mAdc	
			V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L	
			-5.2 to -1.405	-1.165 to -0.825	-	-5.2	-2.5	
			-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5	
			-5.2 to -1.205	-0.875 to -0.530	-	-5.2	-2.5	
			-5.2 to -1.350	-1.070 to -0.740	-	-5.2	-2.5	
			-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5	
			-5.2 to -1.260	-0.950 to -0.615	-	-5.2	-2.5	
			TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:					
			V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L	V _{CC} (Gnd)
Power Supply Drain Current MC1207/MC1007 MC1208/MC1008 MC1209/MC1009	I _E	7 ↓	-	-	-	1, 2, 3, 5, 6, 7, 8, 11, 12, 13 ↓	-	14 ↓
Input Current	I _{in}	1 2 3	-	-	1 2 3	2, 3, 5, 6, 7, 8, 11, 12, 13 1, 3, 5, 6, 7, 8, 11, 12, 13 1, 2, 5, 6, 7, 8, 11, 12, 13	-	14 ↓
Input Leakage Current	I _R	Inputs*	-	-	-	1, 2, 3, 5, 6, 7, 8, 11, 12, 13	-	14
"NOR" Logical "1" Output Voltage†	V _{OH} †	4 ↓	1 2 3	-	-	2, 3, 5, 6, 7, 8, 11, 12, 13 1, 3, 5, 6, 7, 8, 11, 12, 13 1, 2, 5, 6, 7, 8, 11, 12, 13	4 ↓	14 ↓
"NOR" Logical "0" Output Voltage	V _{OL}	4 ↓	-	1 2 3	-	2, 3, 5, 6, 7, 8, 11, 12, 13 1, 3, 5, 6, 7, 8, 11, 12, 13 1, 2, 5, 6, 7, 8, 11, 12, 13	-	14 ↓
Switching Times						V _{EE} = -4.0 Vdc		(+1.2 V)
Propagation Delay (Fan-Out = 3)	t _{1+4- t₁₋₄₊}	4 ↓	1 ↓	4 ↓	-	2, 3, 5, 6, 7, 8, 11, 12, 13 ↓	-	14 ↓
(Fan-Out = 15)	t _{1+4- t₁₋₄₊}				-		-	
Rise Time (Fan-Out = 3)	t ₄₊				-		-	
Fall Time (Fan-Out = 3)	t ₄₋				-		-	

PROPAGATION DELAY



RISE AND FALL TIMES



SWITCHING TIME WAVEFORMS



Switching waveforms shown for pulse in on pin 1 and pulse out on pin 4, however all other input-output combinations will meet the limits specified.

Input Pulse t_r and $t_f = 5.0 \pm 0.5$ ns.

APPLICATIONS INFORMATION

The MC1007-1009/MC1207-1209 triple 3-input gates provide NOR outputs only, due to the pin limitation of the 14-lead package. The three options on the emitter follower pull-down resistors, as on all of the basic gates, provide a significant power savings when the wired-OR feature is utilized. The power dissipation of additional emitter-follower resistors and additional gates to perform the OR function is


eliminated. By making liberal use of the wired-OR feature, power dissipation in a logic system may be reduced by one-half. If fast propagation delay time through a logic chain is required, an additional gate propagation delay of 4.0 to 5.0 ns is saved each time the wired-OR option is employed. Shown below are two examples of an MC1008/MC1208 with the outputs wired together.

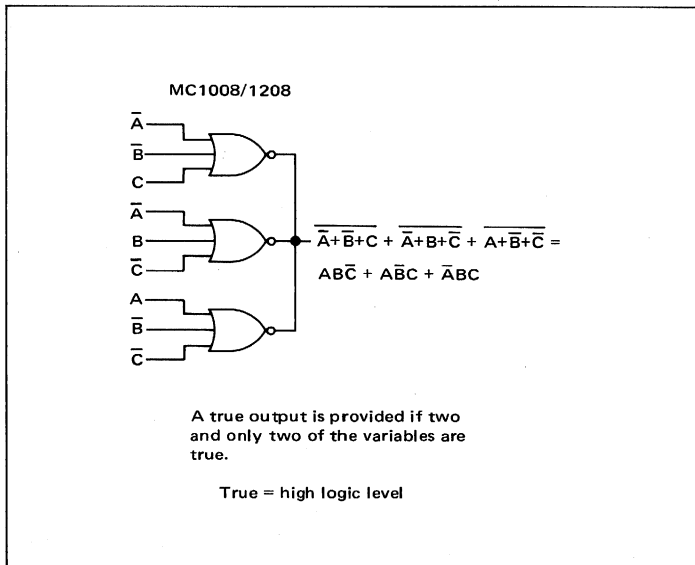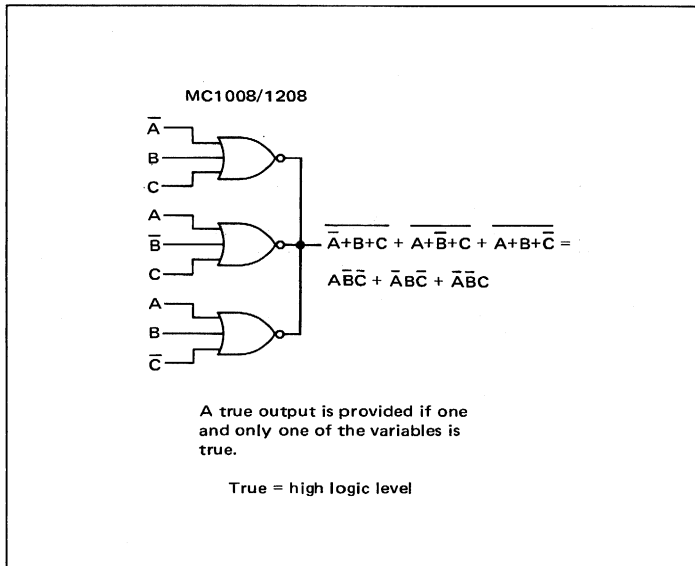


MC1010 thru MC1012 MC1210 thru MC1212

Provide the NOR output function. These devices contain an internal bias reference insuring that the threshold point is always in the center of the transition region over the temperature range.


Emitter follower output configurations differ for these three circuits as shown in the circuit schematic.

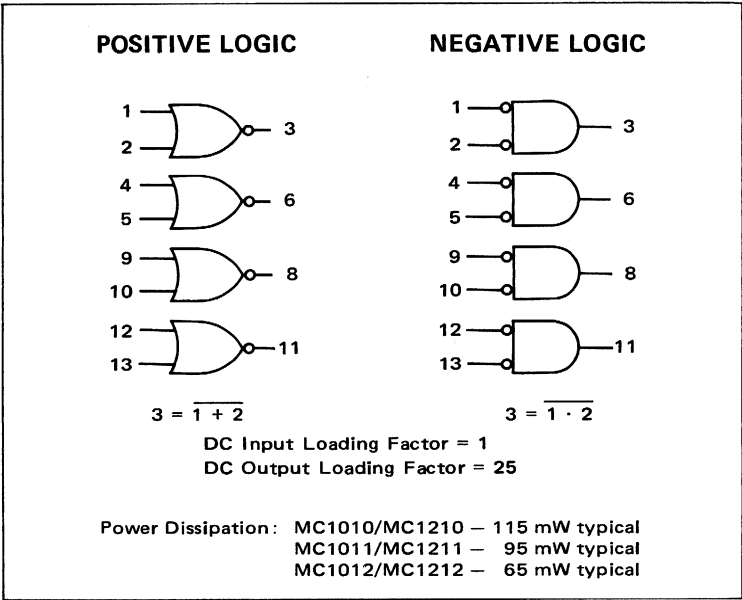

MC1010/MC1210 CIRCUIT SCHEMATIC

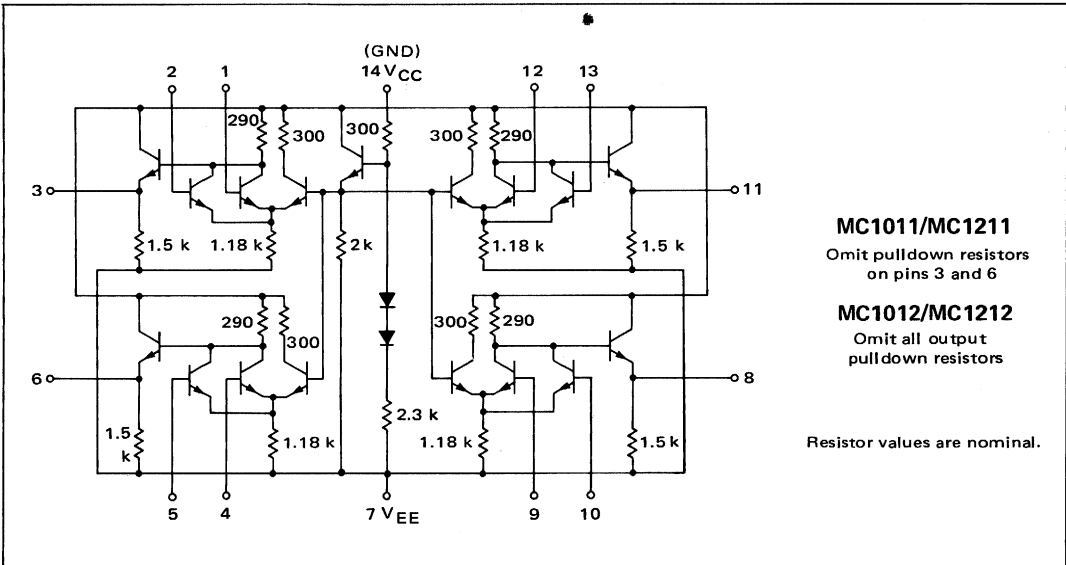

MC1010 thru MC1012, MC1210 thru MC1212 (continued)




ELECTRICAL CHARACTERISTICS

Test procedures are shown for only one gate. The other gates are tested in the same manner. Outputs without pull-down resistors are tested with a 1.5 kΩ resistor to V_{EE}.


Characteristic	Symbol	Pin Under Test	MC1210-1212 Test Limits						MC1010-1012 Test Limits							
			-55°C		+25°C		+125°C		0°C		+25°C		+75°C		Unit	
			Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
Power Supply Drain Current MC1210/MC1010 MC1211/MC1011 MC1212/MC1012	I _E	7	-	-	-	32	-	-	mAdc	-	-	-	32	-	-	mAdc
Input Current	I _{in}	1 2	-	-	-	100	-	-	μAdc	-	-	-	100	-	-	μAdc
Input Leakage Current	I _R	Inputs*	-	-	-	0.2	-	1.0	μAdc	-	-	-	0.2	-	1.0	μAdc
"NOR" Logical "1" Output Voltage‡	V _{OH} ‡	3	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	Vdc	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	Vdc
"NOR" Logical "0" Output Voltage	V _{OL}	3	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	Vdc	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	Vdc
Switching Times Propagation Delay (Fan-Out = 3)	t ₁₊₃₋	3	Typ	Max	Typ	Max	Typ	Max	ns	Typ	Max	Typ	Max	Typ	Max	ns
	t ₁₋₃₊		4.0	7.5	4.5	7.5	6.0	9.0		4.0	7.5	4.5	7.5	5.5	8.5	
	t ₁₊₃₋		5.0	7.0	5.0	7.0	6.0	9.0		5.0	7.0	5.0	7.0	5.5	8.0	
	t ₁₋₃₊		18	-	18	-	22	-		18	-	18	-	20	-	
	t ₁₋₃₊		6.0	-	6.0	-	9.0	-		6.0	-	6.0	-	7.0	-	
Rise Time (Fan-Out = 3)	t ₃₊		4.0	7.5	4.0	7.0	5.0	8.0		4.0	7.0	4.0	7.0	4.5	7.5	
Fall Time (Fan-Out = 3)	t ₃₋		6.0	8.5	6.0	8.0	7.0	10		6.0	8.0	6.0	8.0	6.5	9.0	

* Individually test each input using the pin connections shown.
 ‡ V_{OH} limits apply from no load (0 mA) to full load (-2.5 mA).

SWITCHING TIME TEST CIRCUIT @ 25°C

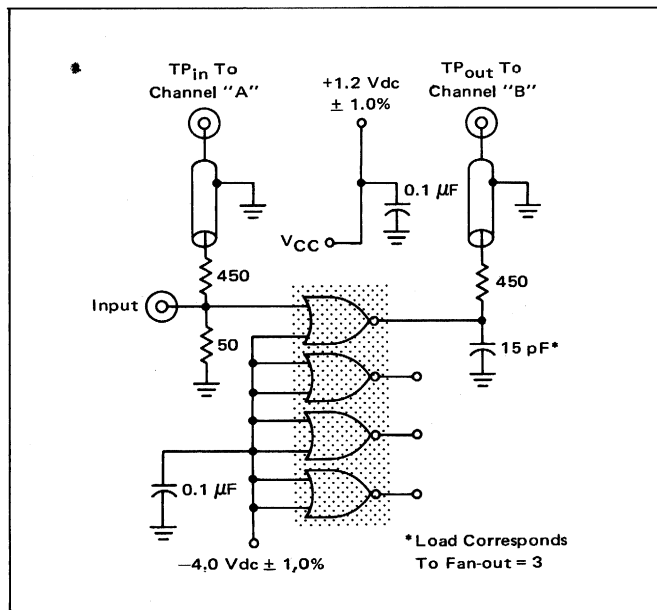

			TEST VOLTAGE/CURRENT VALUES					
			Vdc ± 1.0%				mAdc	
			V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L	
MC1210-1212	@Test Temperature		-5.2 to -1.405	-1.165 to -0.825	-	-5.2	-2.5	
	+25°C		-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5	
	+125°C		-5.2 to -1.205	-0.875 to -0.530	-	-5.2	-2.5	
MC1010-1012	0°C		-5.2 to -1.350	-1.070 to -0.740	-	-5.2	-2.5	
	+25°C		-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5	
	+75°C		-5.2 to -1.260	-0.950 to -0.615	-	-5.2	-2.5	
			TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:					V _{CC} (Gnd)
Characteristic	Symbol	Pin Under Test	V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L	
Power Supply Drain Current MC1210/MC1010 MC1211/MC1011 MC1212/MC1012	I _E	7 ↓	-	-	-	1, 2, 4, 5, 7, 9, 10, 12, 13 ↓	-	14 ↓
Input Current	I _{in}	1 2	-	-	1 2	2, 4, 5, 7, 9, 10, 12, 13 1, 4, 5, 7, 9, 10, 12, 13	-	14 14
Input Leakage Current	I _R	Inputs*	-	-	-	1, 2, 4, 5, 7, 9, 10, 12, 13	-	14
"NOR" Logical "1" Output Voltage†	V _{OH} †	3 3	1 2	-	-	2, 4, 5, 7, 9, 10, 12, 13 1, 4, 5, 7, 9, 10, 12, 13	3 3	14 14
"NOR" Logical "0" Output Voltage	V _{OL}	3 3	-	1 2	-	2, 4, 5, 7, 9, 10, 12, 13 1, 4, 5, 7, 9, 10, 12, 13	-	14 14
Switching Times Propagation Delay (Fan-Out = 3)	t ₁₊₃₋	3 ↓	Pulse In 1 ↓	Pulse Out 3 ↓	-	V _{EE} = -4.0 Vdc 2, 4, 5, 7, 9, 10, 12, 13 ↓	-	(+1.2V) 14 ↓
(Fan-Out = 15)	t ₁₋₃₊ t ₁₊₃₋ t ₁₋₃₊	↓	↓	↓	-	↓	-	↓
Rise Time (Fan-Out = 3)	t ₃₊	↓	↓	↓	-	↓	-	↓
Fall Time (Fan-Out = 3)	t ₃₋	↓	↓	↓	-	↓	-	↓

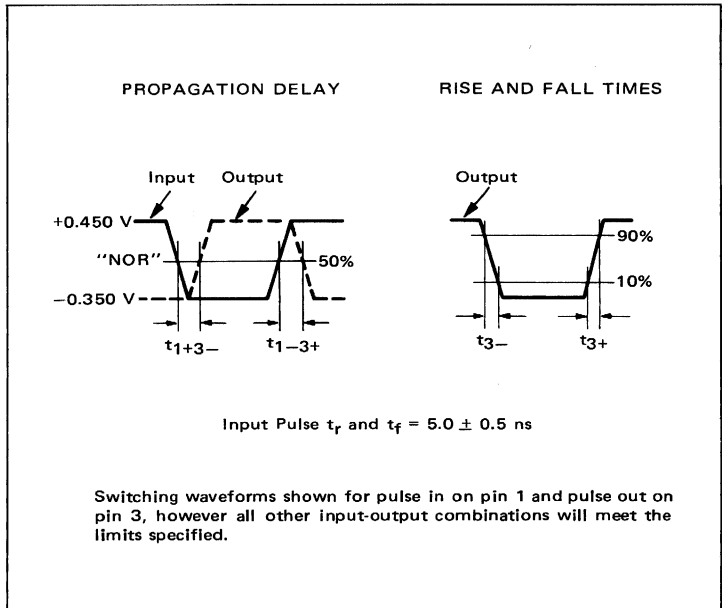

SWITCHING TIME WAVEFORMS

APPLICATIONS INFORMATION

The MC1010-1012/MC1210-1212 quad 2-input NOR gates are very useful in building more complex functions. For example, two R-S flip-flops may be obtained by cross-coupling gates, or a single gated R-S flip-flop may be obtained (see diagram below).

Dual clocked R-S flip-flops are available in MECL II (see flip-flop section). The quad 2-input gate may also be used as a dual exclusive OR or NOR by ORing the outputs as shown below.


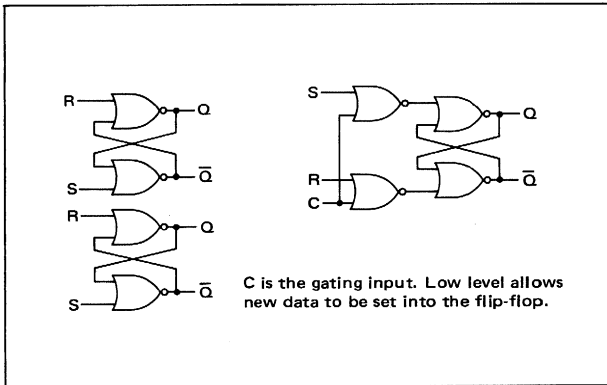


FIGURE 1 - FLIP-FLOPS OBTAINED BY USING MC1010-1012/MC1210-1212 GATES

FIGURE 2 - DUAL EXCLUSIVE "OR" or "NOR" GATES

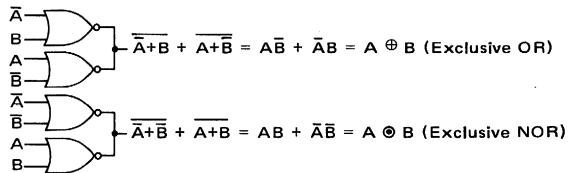


The nominal propagation delay through the Exclusive OR or NOR is 4.0 ns. The Exclusive NORs or ORs are often used as comparator gates giving an output whenever the input data is the same or different. Parity checkers are also built from Exclusive OR gates.

**QUAD EXCLUSIVE
"OR" GATES**


MECL II MC1000/1200 series

**MC1030
MC1230**

Four gate arrays designed to provide four Exclusive OR functions. The output is high if and only if one input is high and all other inputs are low.

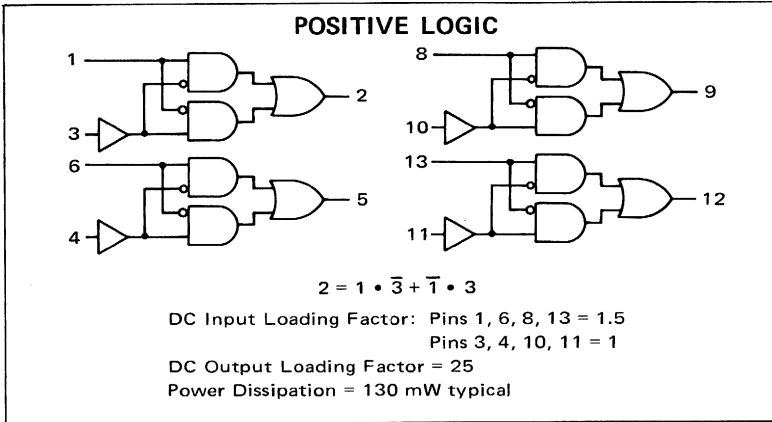


CIRCUIT SCHEMATIC

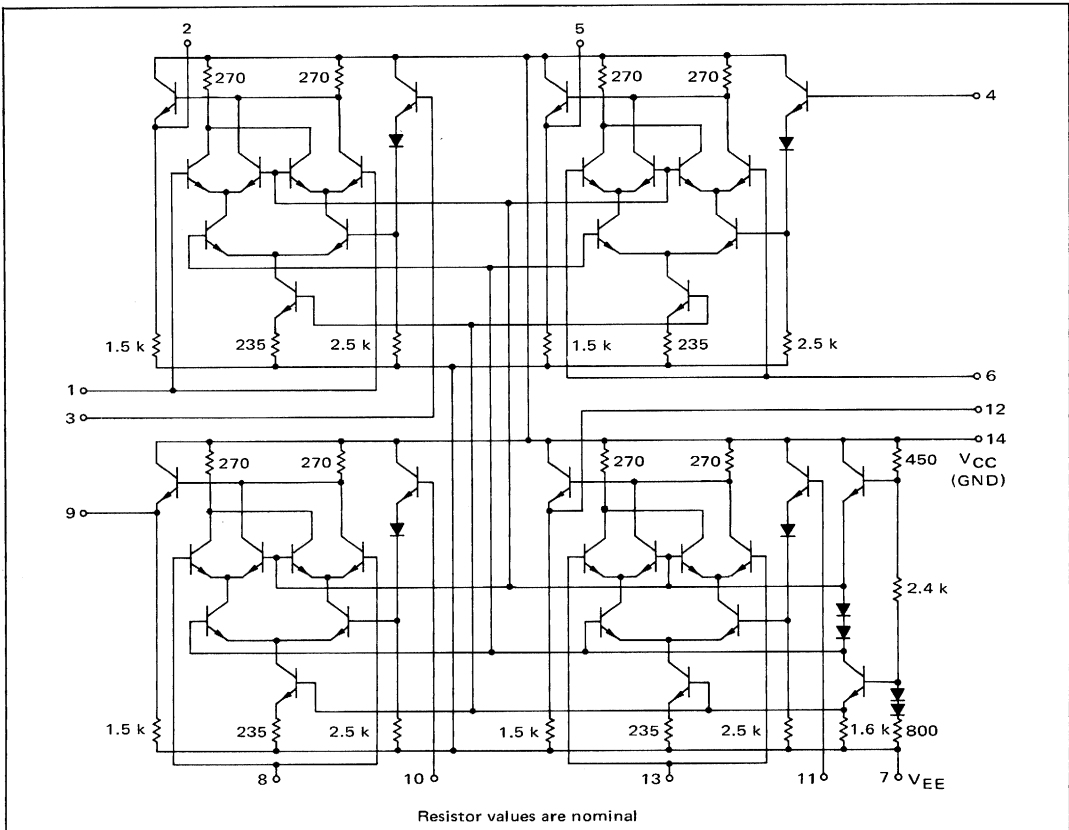

MC1030, MC1230 (continued)

ELECTRICAL CHARACTERISTICS

Test procedures are shown for only one gate. The other gates are tested in the same manner.




Characteristic	Symbol	Pin Under Test	MC1230 Test Limits						Unit	MC1030 Test Limits						
			-55°C		+25°C		+125°C			0°C		+25°C		+75°C		Unit
			Min	Max	Min	Max	Min	Max		Min	Max	Min	Max	Min	Max	
Power Supply Drain Current	I_E	7	-	--	-	33	-	-	-	-	-	-	33	-	-	mAdc
Input Current	I_{in}	1 3	-	-	-	150	-	-	-	-	-	-	150	-	-	μ Adc
Input Leakage Current	I_R	1 3	-	-	-	0.4	-	2.0	-	-	-	-	0.4	-	2.0	μ Adc
Logical "1" Output Voltage	$V_{OH} \ddagger$	2 2	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	Vdc	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	Vdc
Logical "0" Output Voltage	V_{OL}	2 2	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	Vdc	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	Vdc
Switching Times (Fan-Out = 3) Propagation Delay			Typ	Max	Typ	Max	Typ	Max		Typ	Max	Typ	Max	Typ	Max	
t_{1+2-}	2		5.0	8.5	5.0	8.5	6.0	10	ns	5.0	8.5	5.0	8.5	6.0	9.0	ns
t_{1-2+}				8.0		8.0		9.0			8.0		8.0	5.0	8.5	
t_{1+2+}				8.0		8.0		9.0			8.0		8.0	5.0	8.5	
t_{1-2-}			6.0	9.0	6.0	9.0		10		6.0	9.0	6.0	9.0	6.0	9.5	
t_{3+2-}			5.0	8.5	5.0	8.5		10		5.0	8.5	5.0	8.5	6.0	9.0	
t_{3-2+}				8.0		8.0		9.0			8.0		8.0	5.0	8.5	
t_{3+2+}				8.0		8.0		9.0			8.0		8.0	5.0	8.5	
t_{3-2-}			6.0	9.0	6.0	9.0		10		6.0	9.0	6.0	9.0	6.0	9.5	
Rise Time	t_{2+}		5.0	8.5	5.0	8.5		9.5		5.0	8.5	5.0	8.5	6.0	9.0	
Fall Time	t_{2-}			8.0		8.0		9.0			8.0		8.0	5.0	8.5	
	t_{2-}			8.5		8.5		10			8.5		8.5	6.0	9.0	
	t_{2-}		6.0	9.0	6.0	9.0		10		6.0	9.0	6.0	9.0	6.0	9.5	

V_{OH} limits apply from no load (0 mA) to full load (-2.5 mA).


* V_{IL} or V_{IH} value as given plus +1.2 V

SWITCHING TIME TEST CIRCUIT @ 25°C

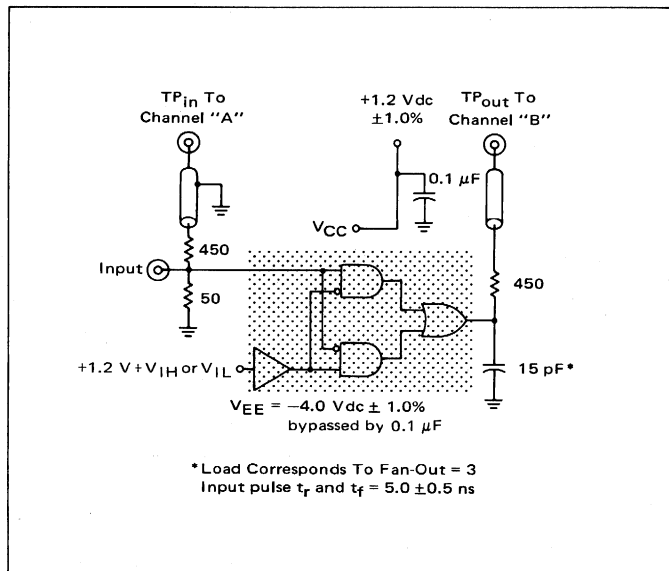

			TEST VOLTAGE/CURRENT VALUES						
@ Test Temperature			Vdc ±1.0%				mAdc		
			V _{IL}	V _{IH}	V _{IH max}	V _{EE}	I _L		
MC1230	{	-55°C	-1.580	-0.990	-	-5.2	-2.5		
		+25°C	-1.500	-0.850	-0.700	-5.2	-2.5		
		+125°C	-1.380	-0.700	-	-5.2	-2.5		
MC1030	{	0°C	-1.525	-0.895	-	-5.2	-2.5		
		+25°C	-1.500	-0.850	-0.700	-5.2	-2.5		
		+75°C	-1.435	-0.775	-	-5.2	-2.5		

			TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:					V _{CC} (Gnd)		
Characteristic	Symbol	Pin Under Test	V _{IL}	V _{IH}	V _{IH max}	V _{EE}	I _L			
Power Supply Drain Current	I _E	7	-	-	-	1, 3, 4, 6, 7, 8, 10, 11, 13	-	14		
Input Current	I _{in}	1	-	-	1	3, 7	-	14		
		3	-	-	3	1, 7	-	14		
Input Leakage Current	I _R	1	-	-	-	1, 3, 7	-	14		
		3	-	-	-	1, 3, 7	-	14		
Logical "1" Output Voltage	V _{OH} †	2	1	3	-	7	2	14		
		2	3	1	-	7	2	14		
Logical "0" Output Voltage	V _{OL}	2	1, 3	-	-	7	-	14		
		2	-	1, 3	-	7	-	14		
Switching Times (Fan-Out = 3) Propagation Delay		2	V _{IL} *	V _{IH} *	Pulse In	V _{EE} = -4.0 Vdc	Pulse Out (+1.2 Vdc)			
			-	3	1	7	2	14		
			-	3	↓	↓	↓	↓		
			3	-	↓	↓	↓	↓		
			3	-	↓	↓	↓	↓		
			-	1	3	↓	↓	↓		
			-	1	↓	↓	↓	↓		
			1	-	↓	↓	↓	↓		
			1	-	↓	↓	↓	↓		
			1	-	↓	↓	↓	↓		
			1	-	↓	↓	↓	↓		
Rise Time	t ₂₊	1	-	3	1	3	1			
Fall Time	t ₂₊	1	-	3	1	3	1			
		1	-	3	1	3	1			

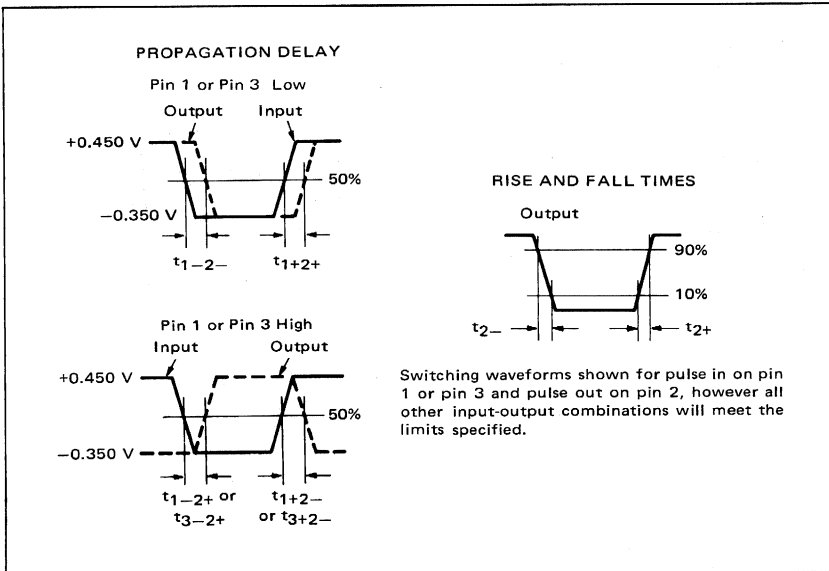


SWITCHING TIME WAVEFORMS

APPLICATIONS INFORMATION

The MC1030/MC1230 quad Exclusive OR gate is a high-speed device employing the series gating technique. The quad Exclusive OR (\oplus) is useful in many applications such as data comparison, parity generation and checking, frequency mixing, decision circuitry, and code conversion circuitry. The output of each Exclusive OR is high if the two inputs are at different logic levels, while it is low if the inputs are at the same level.

Figure 1 illustrates the comparison of two 8-bit words. The OR output goes high if any Source "A" bit is not the same as the corresponding Source "B" bit. The comparison of two 16-bit words is possible by using two more MC1030/MC1230's, the other half of the


FIGURE 1 – DATA COMPARATOR

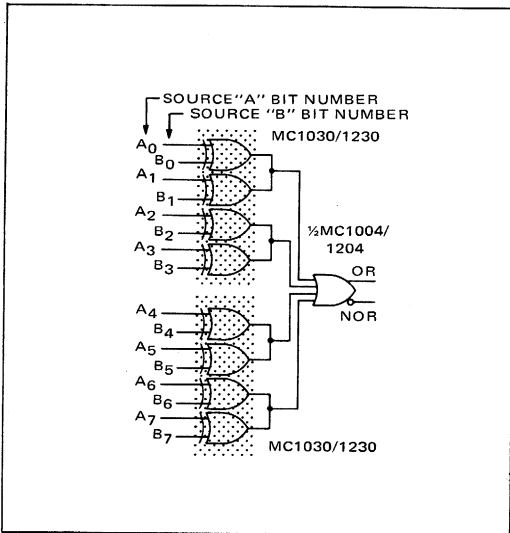

SAMPLE TRUTH TABLE

Pin No.	Inputs		Output
	1	3	2
0	0	0	0
0	0	1	1
1	0	0	1
0	0	0	0


The Exclusive OR may be symbolized as:



MC1004/MC1204, and ORing the two OR outputs together. Note that the MC1030/MC1230 gates are paired together (in Wired-OR configuration) to save extra inputs on the MC1004/MC1204. Typical propagation delay time from inputs to the output of the MC1004/MC1204 is 10 ns.

Figure 2 illustrates checking the bits of a word for odd parity; if the sum of the inputs is odd, the output will be high. (It is also possible to mix MC1030/MC1230 quad Exclusive OR gates and MC1031/MC1231 quad Exclusive NOR gates to obtain the same function.)

FIGURE 2 – 25 ns 16-BIT PARITY CHECKER (Odd Parity)

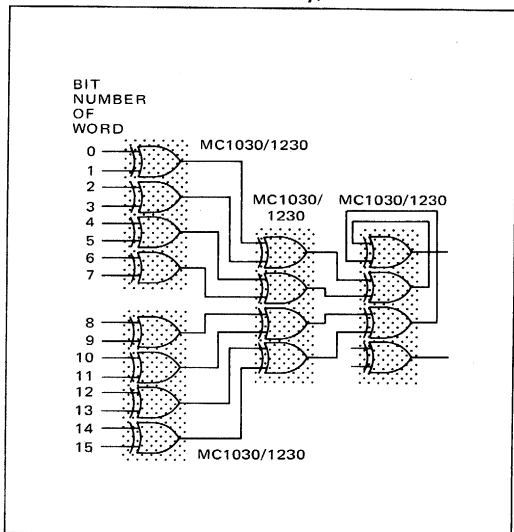


**QUAD EXCLUSIVE
"NOR" GATES**

MECL II MC1000/1200 series

**MC1031
MC1231**

Four gate arrays designed to provide four Exclusive NOR functions. The output is high if and only if the two inputs are at the same logic level.


POSITIVE LOGIC

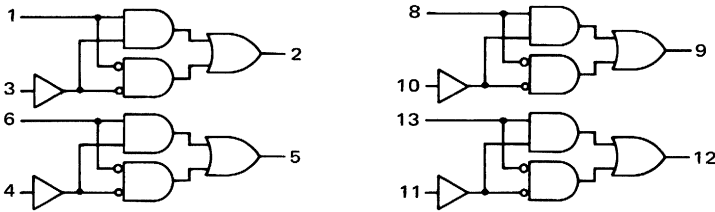

$$2 = 1 \cdot 3 + \bar{1} \cdot \bar{3}$$


DC Input Loading Factor: Pins 1, 6, 8, 13 = 1.5
 Pins 3, 4, 10, 11 = 1
 DC Output Loading Factor = 25
 Power Dissipation = 130 mW typical

CIRCUIT SCHEMATIC

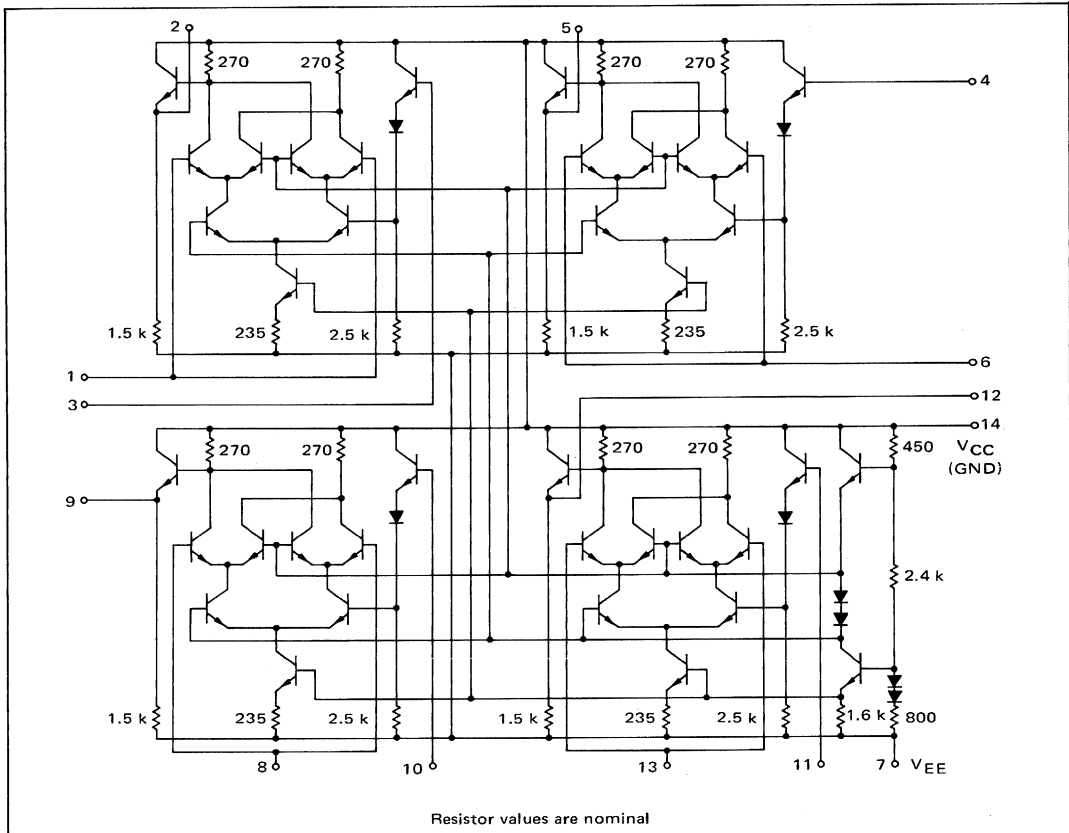

Resistor values are nominal

MC1031, MC1231 (continued)



ELECTRICAL CHARACTERISTICS


Test procedures are shown for only one gate. The other gates are tested in the same manner.

Characteristic	Symbol	Pin Under Test	MC1231 Test Limits							Unit	MC1031 Test Limits						Unit	
			-55°C		+25°C		+125°C		0°C		+25°C		+75°C					
			Min	Max	Min	Max	Min	Max	Min		Max	Min	Max	Min	Max			
Power Supply Drain Current	I_E	7	-	-	-	33	-	-	mAdc	-	-	-	33	-	-	mAdc		
Input Current	I_{in}	1	-	-	-	150	-	-	μ Adc	-	-	-	150	-	-	μ Adc		
		3	-	-	-	100	-	-	μ Adc	-	-	-	100	-	-	μ Adc		
Input Leakage Current	I_R	1	-	-	-	0.4	-	2.0	μ Adc	-	-	-	0.4	-	2.0	μ Adc		
		3	-	-	-	0.2	-	1.0	μ Adc	-	-	-	0.2	-	1.0	μ Adc		
Logical "1" Output Voltage	$V_{OH} \ddagger$	2	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	Vdc	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	Vdc		
		2	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	Vdc	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	Vdc		
Logical "0" Output Voltage	V_{OL}	2	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	Vdc	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	Vdc		
		2	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	Vdc	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	Vdc		
Switching Times (Fan-Out = 3) Propagation Delay	t_{1+2-} t_{1-2+} t_{1+2+} t_{1-2-} t_{3+2-} t_{3-2+} t_{3+2+} t_{3-2-}	2	Typ	Max	Typ	Max	Typ	Max	ns	Typ	Max	Typ	Max	Typ	Max	ns		
			5.0	8.5	5.0	8.5	6.0	10		5.0	8.5	5.0	8.5	6.0	9.0			
			↓	8.0	↓	8.0	↓	9.0		↓	8.0	↓	8.0	↓	5.0		8.5	
			↓	8.0	↓	8.0	↓	9.0		↓	8.0	↓	8.0	↓	5.0		8.5	
			↓	6.0	↓	9.0	↓	6.0		↓	10	↓	6.0	↓	9.0		6.0	9.5
			↓	6.0	↓	9.0	↓	5.0		↓	10	↓	5.0	↓	8.5		6.0	9.0
			↓	8.0	↓	8.0	↓	8.0		↓	9.0	↓	8.0	↓	8.0		5.0	8.5
			↓	8.0	↓	8.0	↓	8.0		↓	9.0	↓	8.0	↓	8.0		5.0	8.5
			↓	6.0	↓	9.0	↓	6.0		↓	10	↓	6.0	↓	9.0		6.0	9.5
			↓	5.0	↓	8.5	↓	5.0		↓	9.5	↓	5.0	↓	8.5		6.0	9.0
			↓	8.0	↓	8.0	↓	8.0		↓	9.0	↓	8.0	↓	8.0		5.0	8.5
			↓	8.5	↓	8.5	↓	8.5		↓	10	↓	8.5	↓	8.5		6.0	9.0
Rise Time	t_{2+}	↓	8.0	↓	8.0	↓	9.0	↓	8.0	↓	8.0	5.0	8.5	↓	8.5			
Fall Time	t_{2-}	↓	8.5	↓	8.5	↓	10	↓	8.5	↓	8.5	6.0	9.0	↓	9.0			
	t_{2-}	↓	6.0	↓	9.0	↓	6.0	↓	9.0	↓	6.0	9.0	6.0	9.5	↓	9.5		

$\ddagger V_{OH}$ limits apply from no load (0 mA) to full load (-2.5 mA).


* V_{IL} or V_{IH} value as given plus +1.2 V

SWITCHING TIME TEST CIRCUIT @ 25°C

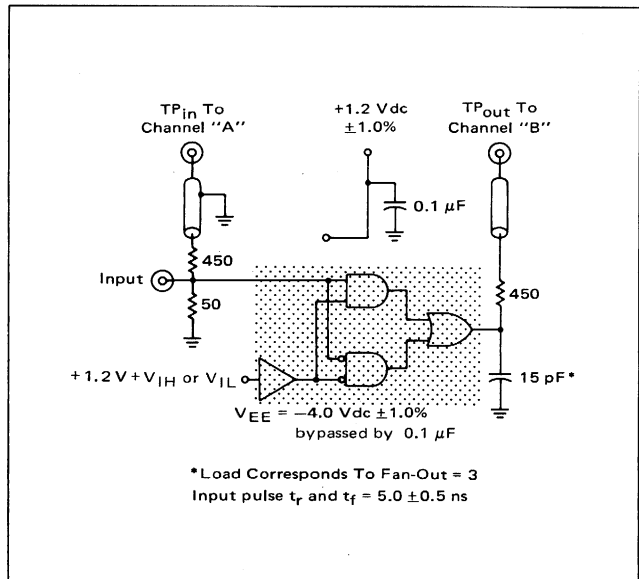

		TEST VOLTAGE/CURRENT VALUES				
		Vdc ±1.0%				mAdc
@Test Temperature		V _{IL}	V _{IH}	V _{IH max}	V _{EE}	I _L
MC1231	-55°C	-1.580	-0.990	-	-5.2	-2.5
	+25°C	-1.500	-0.850	-0.700	-5.2	-2.5
	+125°C	-1.380	-0.700	-	-5.2	-2.5
MC1031	0°C	-1.525	-0.895	-	-5.2	-2.5
	+25°C	-1.500	-0.850	-0.700	-5.2	-2.5
	+75°C	-1.435	-0.775	-	-5.2	-2.5

Characteristic	Symbol	Pin Under Test	TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:					V _{CC} (Gnd)
			V _{IL}	V _{IH}	V _{IH max}	V _{EE}	I _L	
Power Supply Drain Current	I _E	7	-	-	-	1, 3, 4, 6, 7, 8, 10, 11, 13	-	14
Input Current	I _{in}	1 3	-	-	1	3, 7	-	14
			-	-	3	1, 7	-	14
Input Leakage Current	I _R	1 3	-	-	-	1, 3, 7	-	14
			-	-	-	1, 3, 7	-	14
Logical "1" Output Voltage	V _{OH} †	2 2	1, 3	-	-	7	2	14
			-	1, 3	-	7	2	14
Logical "0" Output Voltage	V _{OL}	2 2	1 3	3 1	- -	7 7	- -	14 14
			3 1	1 -	- -	7 7	- -	14 14
Switching Times (Fan-Out = 3) Propagation Delay	t ₁₊₂₋ t ₁₋₂₊ t ₁₊₂₊ t ₁₋₂₋ t ₃₊₂₋ t ₃₋₂₊ t ₃₊₂₊ t ₃₋₂₋	2	V _{IL} *	V _{IH} *	Pulse In	V _{EE} = -4.0 Vdc	Pulse Out	(+1.2 Vdc)
			3	-	1	7	2	14
Rise Time	t ₂₊ t ₂₊	↓	3	-	1	7	2	14
			3	-	1	7	2	14
			-	3	↓	7	2	14
			-	3	↓	7	2	14
Fall Time	t ₂₋ t ₂₋	↓	3	-	1	7	2	14
			-	1	3	7	2	14
			3	-	1	7	2	14
			-	1	3	7	2	14

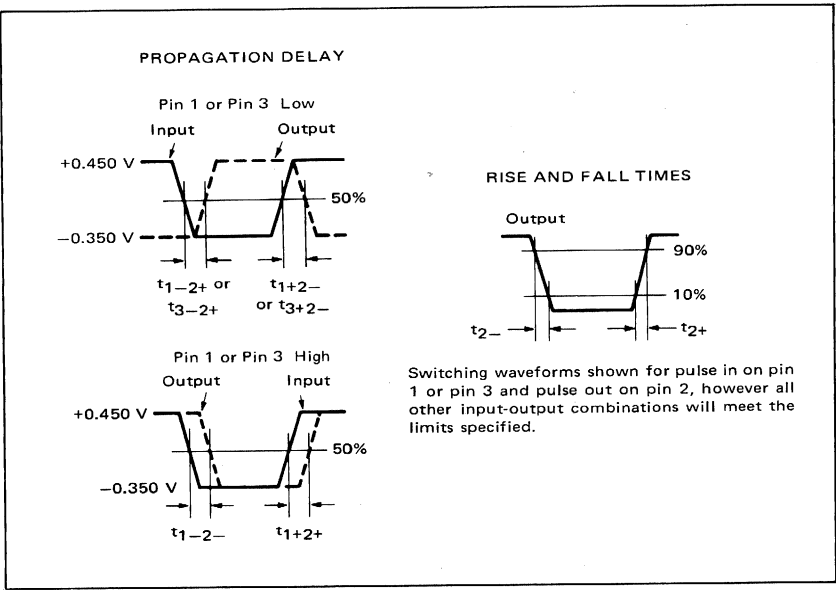


SWITCHING TIME WAVEFORMS

APPLICATIONS INFORMATION

The MC1031/MC1231 quad Exclusive NOR gate is obtained by changing circuit interconnections of the MC1030/MC1230 through use of a different metal mask. The quad Exclusive NOR (\odot) is useful for data comparison, parity generation and checking, decision circuitry, code conversion circuitry, and frequency mixing. The output of each Exclusive NOR is high if the two inputs are at the same logic levels. The Exclusive NOR is the logical complement or inversion of the Exclusive OR.

Figure 1 illustrates a controlled data inverter in which parallel data can be either inverted or not inverted with a single control level.


FIGURE 1 – CONTROLLED DATA INVERTER

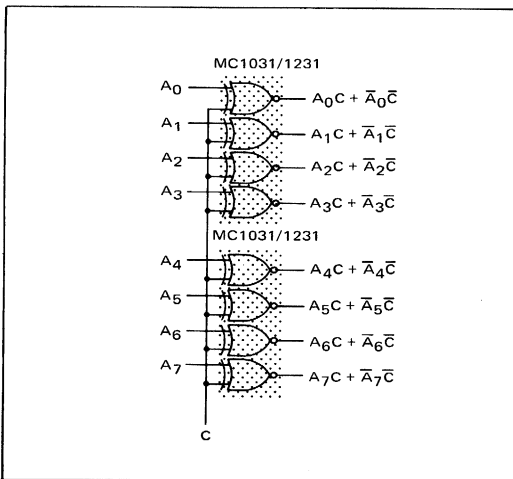

SAMPLE TRUTH TABLE

Pin No.	Inputs		Output
	1	3	2
0	0	0	1
0	1	1	0
1	0	0	0
1	1	1	1


The Exclusive NOR may be symbolized as:



For example, the input information is passed directly to the output if C is at a high level. Exclusive OR gates may also be used to perform this function. The C input would be inverted for the same logic function.

Figure 2 illustrates checking the bits of a word for even parity; if the sum of the inputs is even, the output will be high. (It is also possible to mix MC1031/MC1231 quad Exclusive NOR gates and MC1030/MC1230 quad Exclusive OR gates to obtain the same function.)

FIGURE 2 – 25 ns 16-BIT PARITY CHECKER (Even Parity)

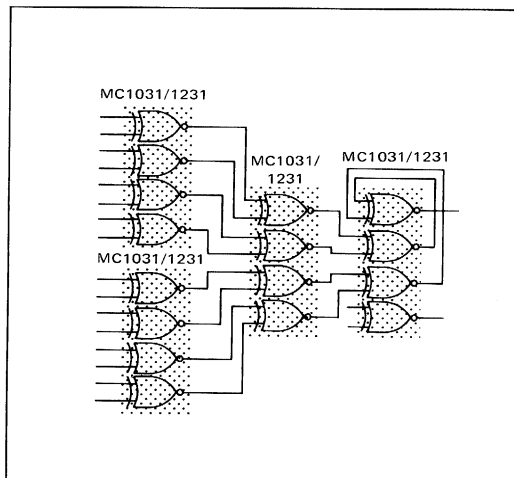


85-MHz AC-COUPLED
J-K FLIP-FLOPS

MECL II MC1000/1200 series

MC1013
MC1213

Designed for use at clock frequencies to 70 MHz minimum (85 MHz typical). Logic performing inputs (\bar{J} and \bar{K}) are available, as well as dc SET and RESET inputs.

POSITIVE LOGIC



DC Input Loading Factor = 1
DC Output Loading Factor = 25
Power Dissipation = 125 mW typical

- * Any \bar{J} or \bar{K} input, not used for \bar{C}_D .
- ** \bar{C}_D obtained by connecting one \bar{J} and one \bar{K} input together.

The \bar{J} and \bar{K} inputs refer to logic levels while the \bar{C}_D input refers to dynamic logic swings. The \bar{J} and \bar{K} inputs should be changed to a logical "1" only while the \bar{C}_D input is in a logic "1" state. (\bar{C}_D maximum "1" level = $V_{CC} - 0.6$ V). Clock \bar{C}_D is obtained by tying one \bar{J} and one \bar{K} input together.

R-S TRUTH TABLE

Pin No.	R	S	Q^{n+1}
12	2	13	
0	0	0	Q^n
0	1	1	1
1	0	0	0
1	1	1	N.D.

All \bar{J} - \bar{K} Inputs Are Static

\bar{J}_D - \bar{K}_D TRUTH TABLE

Pin No.	\bar{J}_D	\bar{K}_D	Q^{n+1}
*	*	13	
0	0	0	Q^n
0	1	0	0
1	0	1	1
1	1	1	\bar{Q}^n


All Other \bar{J} - \bar{K} Inputs And The R-S Inputs Are At a "0" Level

CLOCKED \bar{J} - \bar{K} TRUTH TABLE

Pin No.	\bar{J}	\bar{K}	\bar{C}_D	Q^n
*	*	**	13	
ϕ	ϕ	0	0	Q^n
0	0	1	1	\bar{Q}^n
0	1	1	1	1
1	0	1	0	0
1	1	1	1	Q^n


All Other \bar{J} - \bar{K} Inputs And The R-S Inputs Are At a "0" Level

CIRCUIT SCHEMATIC

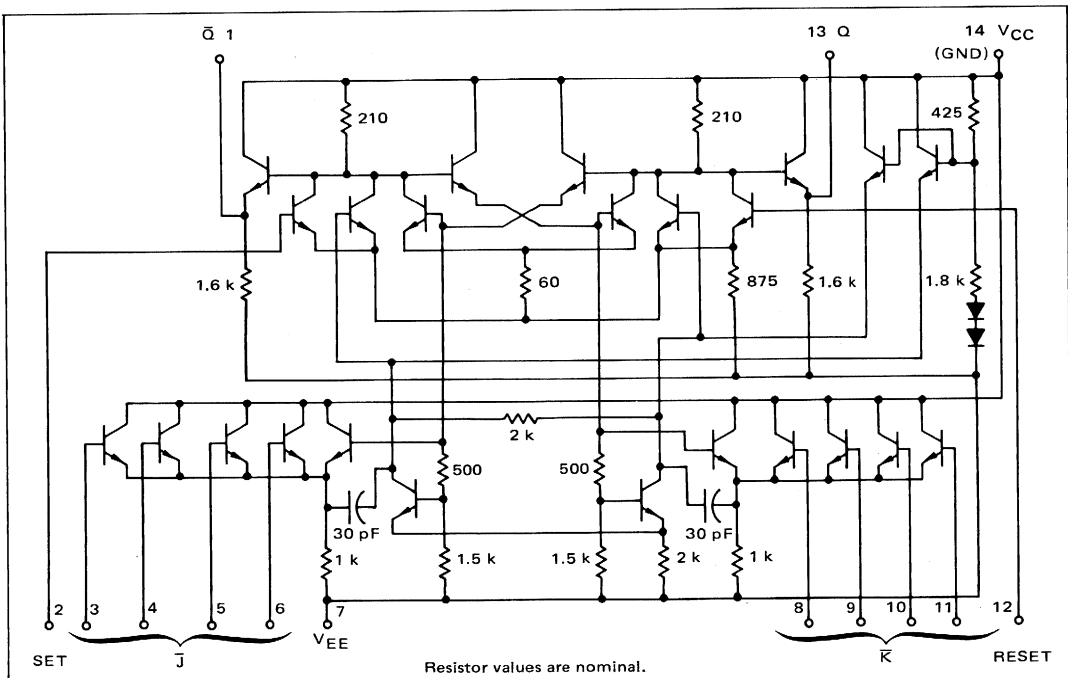

Resistor values are nominal.

MC1013, MC1213 (continued)



ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Pin Under Test	MC1213 Test Limits							MC1013 Test Limits									
			-55°C		+25°C		+125°C		Unit	0°C		+25°C		+75°C		Unit			
			Min	Max	Min	Max	Min	Max		Min	Max	Min	Max	Min	Max				
Power Supply Drain Current	I_E	7	-	-	-	29	-	-	mA _{dc}	-	-	-	29	-	-	mA _{dc}			
Input Current	I_{in}	2	-	-	-	100	-	-	μ A _{dc}	-	-	-	100	-	-	μ A _{dc}			
		3	-	-	-	-	-	-		-	-	-	-	-	-				
		4	-	-	-	-	-	-		-	-	-	-	-	-		-		
		5	-	-	-	-	-	-		-	-	-	-	-	-		-		
		6	-	-	-	-	-	-		-	-	-	-	-	-		-		
		8	-	-	-	-	-	-		-	-	-	-	-	-		-	-	
		9	-	-	-	-	-	-		-	-	-	-	-	-		-	-	-
		10	-	-	-	-	-	-		-	-	-	-	-	-		-	-	-
11	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-				
12	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-				
Input Leakage Current	I_R	Inputs*	-	-	-	0.2	-	1.0	μ A _{dc}	-	-	-	0.2	-	1.0	μ A _{dc}			
"Q" Logical "1" Output Voltage [†]	V_{OH}^{\ddagger}	13	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	V _{dc}	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	V _{dc}			
"Q" Logical "0" Output Voltage	V_{OL}	13	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	V _{dc}	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	V _{dc}			
"Q-bar" Logical "1" Output Voltage [†]	V_{OH}^{\ddagger}	1	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	V _{dc}	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	V _{dc}			
"Q-bar" Logical "0" Output Voltage	V_{OL}	1	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	V _{dc}	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	V _{dc}			
"Q" or "Q-bar" Latch Voltage	V_L	2 12	-1.16 -1.16	-1.34 -1.34	-1.09 -1.09	-1.21 -1.21	-0.93 -0.93	-1.07 -1.07	V _{dc} V _{dc}	-1.11 -1.11	-1.25 -1.25	-1.09 -1.09	-1.21 -1.21	-1.02 -1.02	-1.14 -1.14	V _{dc} V _{dc}			
Input Toggle Frequency (See Figures 3 & 4)	f_{Tog}	13	-	-	70	-	-	-	MHz	-	-	70	-	-	-	MHz			
Sensitivity (No Toggle)	-	1 13	See Figure 1							See Figure 1									
Sensitivity (Toggle)	-	1, 13	See Figure 2							See Figure 2									
Switching Times ^④	Propagation Delay	t_{6+1+} 1 t_{6+1-} 13 t_{8+13+} 13 t_{8+13-} 13	Typ	Max	Typ	Max	Typ	Max	ns	Typ	Max	Typ	Max	Typ	Max	ns			
			6.0	8.5	6.0	8.5	8.0	10.5		6.0	8.5	6.0	8.5	6.5	9.0				
Rise Time	t_{1+} 1 t_{13+} 13	4.0	7.5	4.0	7.5	5.5	9.5	4.0	7.5	4.0	7.5	5.0	8.0						
		4.0	↓	4.0	↓	5.5	9.5	4.0	↓	4.0	↓	5.0	8.0						
Fall Time	t_{1-} 1 t_{13-} 13	5.0	↓	5.0	↓	7.5	10	5.0	↓	5.0	↓	7.5	10						
		5.0	↓	5.0	↓	7.5	10	5.0	↓	5.0	↓	7.5	10						

* Individually test each input using the pin connections shown.
[†] V_{OH} limits apply from no load (0 mA) to full load (-2.5 mA).
[‡] V_{OH} limits apply from no load (0 mA) to full load (-2.5 mA).
^① $V_{in(set)} = V_{OH}$ then $V_{OL(max)}$.
^② $V_{in(reset)} = V_{OH}$ then $V_{OL(max)}$.
^③ Input voltage is adjusted to obtain $dV_{in}/dV_{in} = \infty$.
^④ AC fan-out = 3

			TEST VOLTAGE/CURRENT VALUES									
			Vdc ± 1.0%				mAdc					
			V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L					
MC1213	@Test Temperature	-55°C	-5.2 to -1.405	-1.165 to -0.825	-	-5.2	-2.5					
		+25°C	-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5					
		+125°C	-5.2 to -1.205	-0.875 to -0.530	-	-5.2	-2.5					
MC1013	@Test Temperature	0°C	-5.2 to -1.350	-1.070 to -0.740	-	-5.2	-2.5					
		+25°C	-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5					
		+75°C	-5.2 to -1.260	-0.950 to -0.615	-	-5.2	-2.5					
			TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:									
Characteristic	Symbol	Pin Under Test	V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L	dV _{in}	V _{CC} (Gnd)			
Power Supply Drain Current	I _E	7	-	-	-	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12	-	-	14			
Input Current	I _{in}	2	-	-	2	3, 4, 5, 6, 7, 8, 9, 10, 11, 12	-	-	14			
		3	-	-	3	2, 4, 5, 6, 7, 8, 9, 10, 11, 12	-	-				
		4	-	-	4	2, 3, 5, 6, 7, 8, 9, 10, 11, 12	-	-				
		5	-	-	5	2, 3, 4, 6, 7, 8, 9, 10, 11, 12	-	-				
		6	-	-	6	2, 3, 4, 5, 7, 8, 9, 10, 11, 12	-	-				
		8	-	-	8	2, 3, 4, 5, 6, 7, 9, 10, 11, 12	-	-				
		9	-	-	9	2, 3, 4, 5, 6, 7, 8, 10, 11, 12	-	-				
		10	-	-	10	2, 3, 4, 5, 6, 7, 8, 9, 11, 12	-	-				
		11	-	-	11	2, 3, 4, 5, 6, 7, 8, 9, 10, 12	-	-				
		12	-	-	12	2, 3, 4, 5, 6, 7, 8, 9, 10, 11	-	-				
		Input Leakage Current	I _R	Inputs*	-	-	-	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12		-	-	14
		"Q" Logical "1" Output Voltage [†]	V _{OH} [†]	13	-	-	2 ^①	3, 4, 5, 6, 7, 8, 9, 10, 11, 12		13	-	14
"Q" Logical "0" Output Voltage	V _{OL}	13	-	-	12 ^②	2, 3, 4, 5, 6, 7, 8, 9, 10, 11	-	-	14			
"Q̄" Logical "1" Output Voltage [†]	V _{OH} [†]	1	-	-	12 ^②	2, 3, 4, 5, 6, 7, 8, 9, 10, 11	1	-	14			
"Q̄" Logical "0" Output Voltage	V _{OL}	1	-	-	2 ^①	3, 4, 5, 6, 7, 8, 9, 10, 11, 12	-	-	14			
"Q" or "Q̄" Latch Voltage	V _L	2	-	-	-	3, 4, 5, 6, 7, 8, 9, 10, 11	-	2 ^③	14			
		12	-	-	-	3, 4, 5, 6, 7, 8, 9, 10, 11	-	12 ^③	14			
Input Toggle Frequency (See Figures 3 & 4)	f _{Tog}	13	Pulse In	Pulse Out	-	V _{EE} = -4.0 Vdc 2, 3, 4, 5, 7, 9, 10, 11, 12	-	-	(+1.2V) 14			
			6, 8	13								
Sensitivity (No Toggle)	-	1	6, 8	1	-	↓	-	-	↓			
		13	6, 8	13	-		-					
Sensitivity (Toggle)	-	1, 13	6, 8	1, 13	-	↓	-	-	↓			
Switching Times ^④	Propagation Delay	t ₆₊₁₊	1	6	1	-	2, 3, 4, 5, 7, 9, 10, 11, 12	-	-	14		
		t ₆₊₁₋	1	6	1	-	↓	-	-			
		t ₈₊₁₃₊	13	8	13	-		-	-			
		t ₈₊₁₃₋	13	8	13	-		-	-			
		t ₁₊	1	6	1	-		-	-			
Rise Time	t ₁₃₊	13	8	13	-	-	-	-	↓			
		1	6	1	-	-	-					
Fall Time	t ₁₋	1	6	1	-	-	-	-	↓			
		13	8	13	-	-	-					

FIGURE 1 - SENSITIVITY (NO TOGGLE)

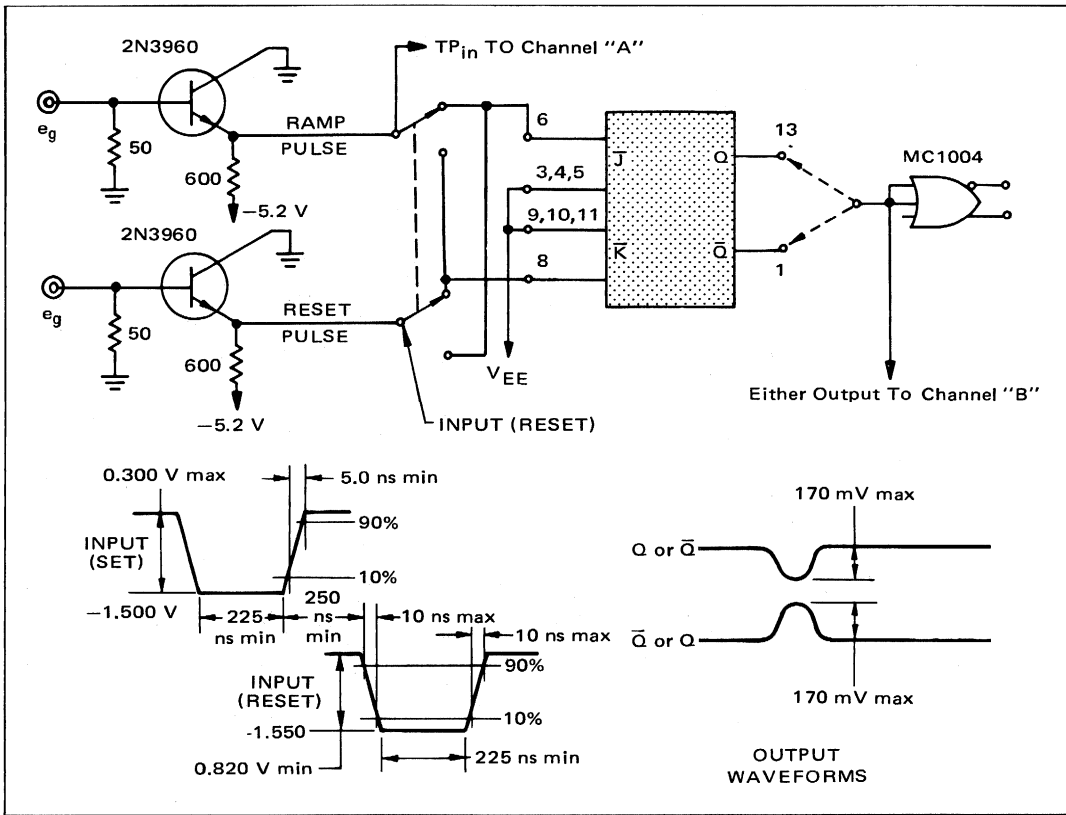
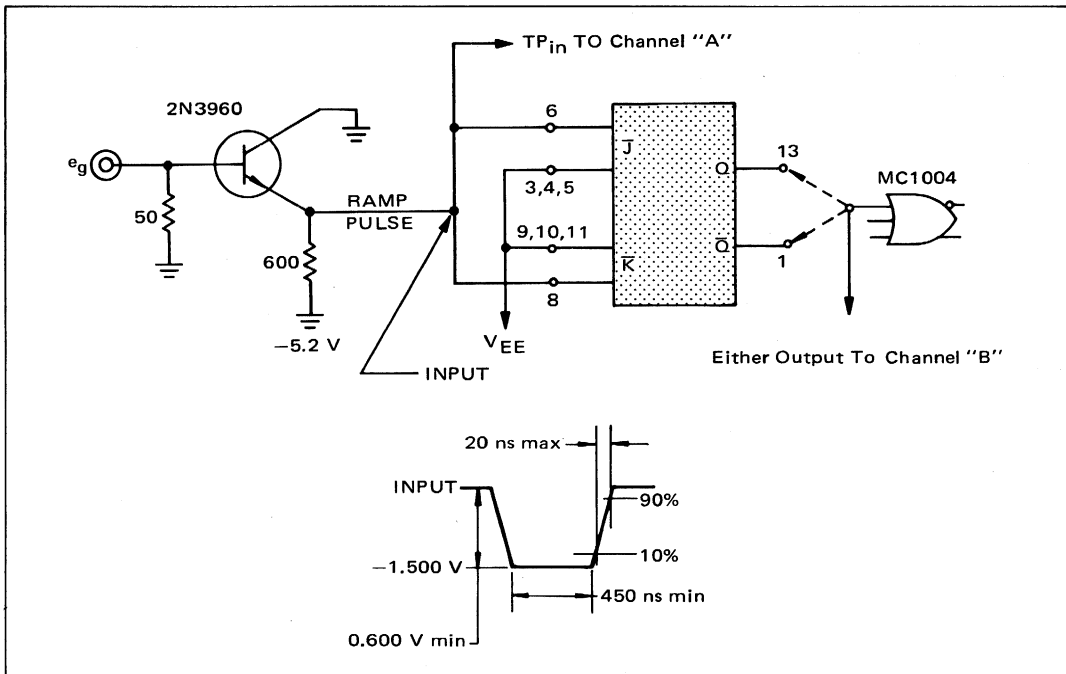


FIGURE 2 - SENSITIVITY (TOGGLE)




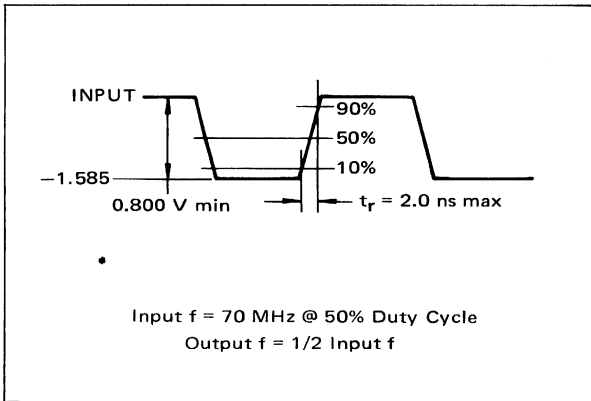


FIGURE 3 - INPUT WAVEFORM TO ESTABLISH MINIMUM TOGGLE FREQUENCY

FIGURE 4 - SWITCHING TIME TEST CIRCUIT AND WAVEFORMS @ 25°C

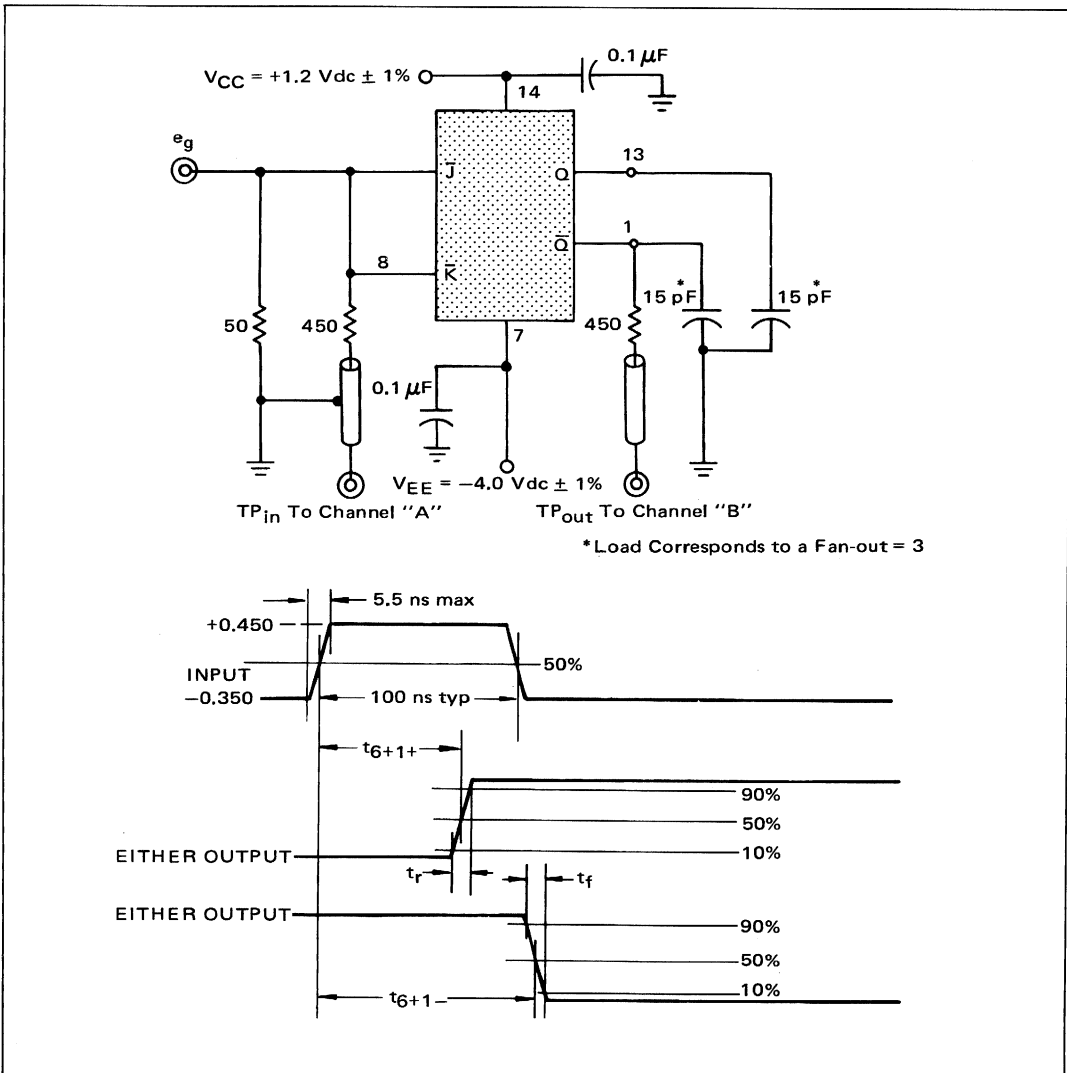

**APPLICATIONS
INFORMATION**


The MC1013/MC1213 J-K flip-flop is used in both counter and shift register applications. Typically the flip-flop will shift and toggle at 85 MHz. Flip-flop operation is illustrated by the curves shown on page 2-125. For a complete characterization of the device, refer to Application Note AN-280. Circuit operation is essentially the same as the MC314/MC364 flip-flop which is explained in Application Note AN-244. Due to the four \bar{J} and four \bar{K} inputs, many clocked and ripple through counters may be built without additional logic. Figure 5 is a table illustrating the \bar{J} and \bar{K} input equations for clocked counters, divide by 3 through 10. Figure 6 is a clocked BCD counter utilizing the logic equations shown in the table.

FIGURE 5 - INPUT EQUATIONS FOR CLOCKED COUNTERS

Divide By:	\bar{J}_A	\bar{K}_A	\bar{J}_B	\bar{K}_B	\bar{J}_C	\bar{K}_C	\bar{J}_D	\bar{K}_D
3	B	0	\bar{A}	0	--	--	--	--
4	0	0	\bar{A}	\bar{A}	--	--	--	--
5	C	0	\bar{A}	\bar{A}	$\bar{A}+\bar{B}$	0	--	--
6	0	0	$\bar{A}+C$	\bar{A}	$\bar{A}+\bar{B}$	A	--	--
7	BC	0	\bar{A}	$\bar{A}+C$	$\bar{A}+\bar{B}$	B	--	--
8	0	0	\bar{A}	\bar{A}	$\bar{A}+\bar{B}$	$\bar{A}+\bar{B}$	--	--
9	D	0	\bar{A}	\bar{A}	$\bar{A}+\bar{B}$	$\bar{A}+\bar{B}$	$\bar{A}+\bar{B}+C$	0
10	0	0	$\bar{A}+D$	\bar{A}	$\bar{A}+\bar{B}$	$\bar{A}+\bar{B}$	$\bar{A}+\bar{B}+C$	\bar{A}


0 (logic zero) ≤ -1.6 V (pin usually tied to V_{EE}).
 All but $\div 7$ may be obtained without additional gating.
 All \bar{J} inputs and all \bar{K} inputs are ORed together.

FIGURE 6 - CLOCKED BCD COUNTER USING MECL \bar{J} - \bar{K} FLIP-FLOPS

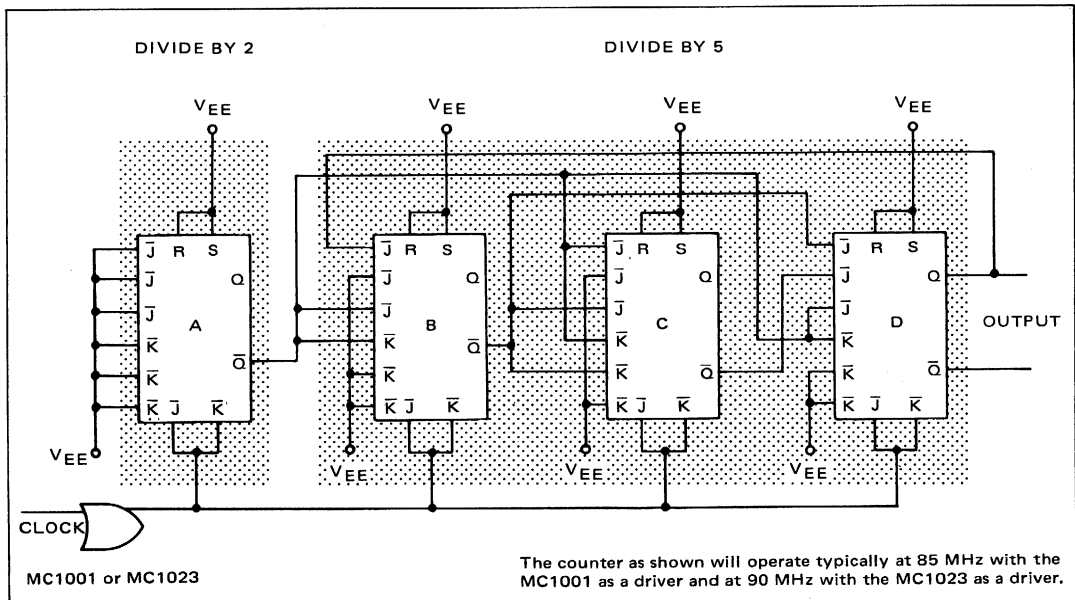

MC1013, MC1213 (continued)

FIGURE 7 - TYPICAL TOGGLE FREQUENCY versus V_{EE}

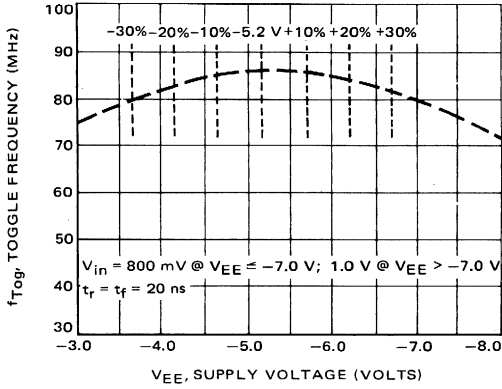

ALL UNUSED INPUTS RETURNED TO V_{EE} .
 $V_{EE} = -5.2$ V, $V_{in} = 800$ mV, $T_A = 25^\circ\text{C}$ unless otherwise noted.
 ——— WORST CASE - - - TYPICAL

FIGURE 8 - TYPICAL AND WORST CASE TOGGLE FREQUENCY versus AMBIENT TEMPERATURE

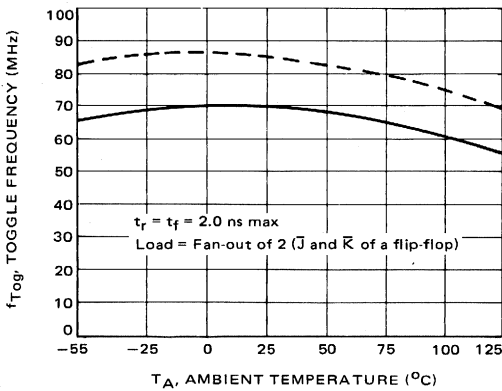


FIGURE 10 - TIME TO DOMINATE

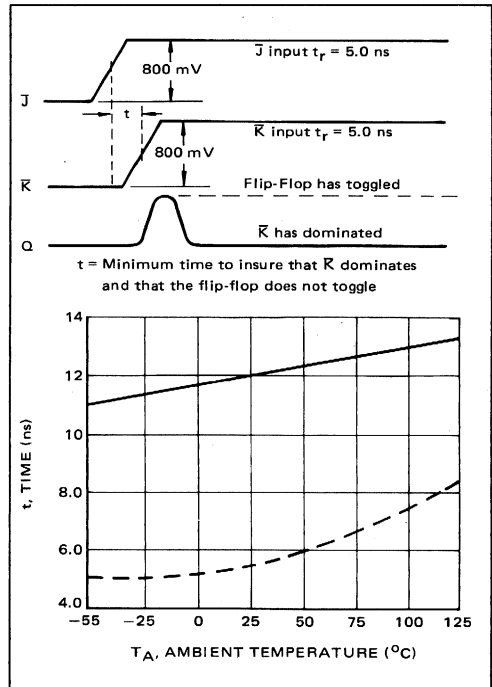


FIGURE 9 - AMPLITUDE versus RISE TIME TO INSURE TOGGLE


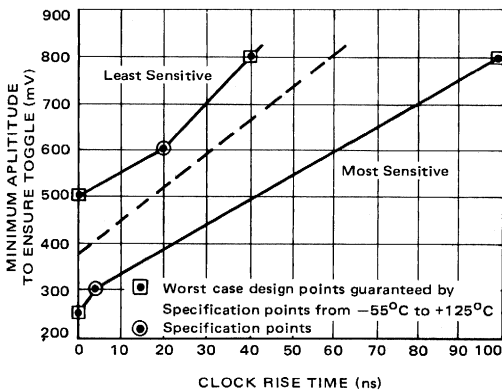


FIGURE 11 - PROPAGATION DELAY TIMES, RISE TIME, FALL TIME versus TEMPERATURE

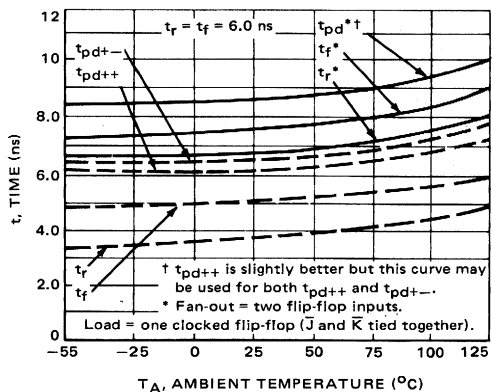


120-MHz AC-COUPLED
J-K FLIP FLOPS

MECL II MC1000/1200 series

MC1027

Designed for use at clock frequencies to 100 MHz minimum (120 MHz typical). Logic performing inputs (\bar{J} and \bar{K}) are available, as well as dc SET and RESET inputs.

POSITIVE LOGIC



DC Input Loading Factor = 2
DC Output Loading Factor = 25
Power Dissipation = 250 mW typical

- *Any \bar{J} or \bar{K} input, not used for \bar{C}_D .
- ** \bar{C}_D obtained by connecting one \bar{J} and one \bar{K} input together.

The \bar{J} and \bar{K} inputs refer to logic levels while the \bar{C}_D input refers to dynamic logic swings. The \bar{J} and \bar{K} inputs should be changed to a logical "1" only while the \bar{C}_D input is in a logic "1" state. (\bar{C}_D maximum "1" level = $V_{CC} - 0.6$ V). Clock \bar{C}_D is obtained by tying one \bar{J} and one \bar{K} input together.

R-S TRUTH TABLE

R	S	Q^{n+1}
12	2	13
0	0	Q^n
0	1	1
1	0	0
1	1	N.D.

All \bar{J} - \bar{K} Inputs Are Static

\bar{J}_D - \bar{K}_D TRUTH TABLE

\bar{J}_D	\bar{K}_D	Q^{n+1}
*	*	13
0	0	Q^n
0	1	0
1	0	1
1	1	\bar{Q}^n


All Other \bar{J} - \bar{K} Inputs And The R-S Inputs Are At a "0" Level


CLOCKED \bar{J} - \bar{K} TRUTH TABLE

\bar{J}	\bar{K}	\bar{C}_D	Q^n
*	*	**	13
ϕ	ϕ	0	Q^n
0	0	1	\bar{Q}^n
0	1	1	1
1	0	1	0
1	1	1	Q^n

All Other \bar{J} - \bar{K} Inputs And The R-S Inputs Are At a "0" Level

CIRCUIT SCHEMATIC

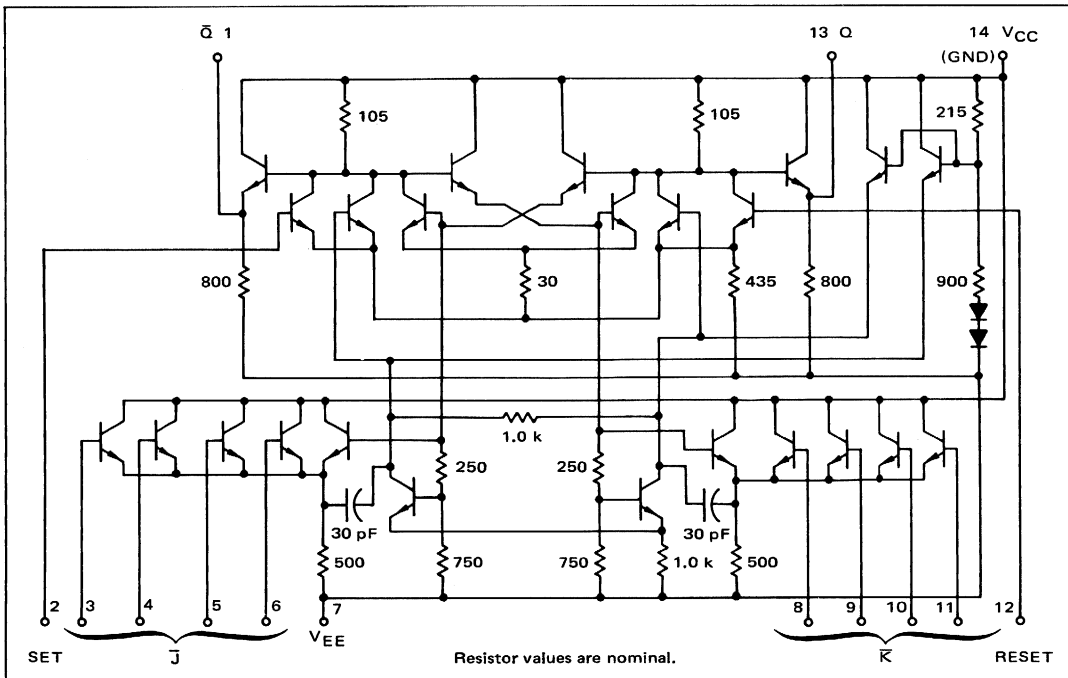



ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Pin Under Test	MC1027 Test Limits						Unit
			0°C		+25°C		+75°C		
			Min	Max	Min	Max	Min	Max	
Power Supply Drain Current	I_E	7	-	-	-	58	-	-	mAdc
Input Current	I_{in}	2 3 4 5 6 8 9 10 11 12	-	-	-	200	-	-	μ Adc
Input Leakage Current	I_R	Inputs*	-	-	-	1.0	-	5.0	μ Adc
'Q' Logical '1' Output Voltage†	$V_{OH}†$	13	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	Vdc
'Q' Logical '0' Output Voltage	V_{OL}	13	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	Vdc
'Q-bar' Logical '1' Output Voltage†	$V_{OH}†$	1	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	Vdc
'Q-bar' Logical '0' Output Voltage	V_{OL}	1	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	Vdc
'Q' or 'Q-bar' Latch Voltage	V_L	2 12	-1.13 -1.13	-1.31 -1.31	-1.11 -1.11	-1.27 -1.27	-1.04 -1.04	-1.21 -1.21	Vdc Vdc
Input Toggle Frequency (See Figures 3 & 4)	f_{Tog}	13	-	-	100	-	-	-	MHz
Sensitivity (No Toggle)	-	1 13	See Figure 1						
Sensitivity (Toggle)	-	1, 13	See Figure 2						
Switching Times ④			Typ	Max	Typ	Max	Typ	Max	
Propagation Delay	t_{6+1+}	1	4.0	6.0	4.0	6.0	5.0	8.0	ns
	t_{6+1-}	1							
	t_{8+13+}	13							
	t_{8+13-}	13							
Rise Time	t_{1+}	1							
	t_{13+}	13							
Fall Time	t_{1-}	1							
	t_{13-}	13							

* Individually test each input using the pin connections shown.

† V_{OH} limits apply from no load (0 mA) to full load (-2.5 mA)

① $V_{in(set)} = V_{OH}$ then $V_{OL(max)}$

② $V_{in(reset)} = V_{OH}$ then $V_{OL(max)}$

③ Input voltage is adjusted to obtain $dV_{in}/dV_{in} = \infty$.

④ AC fan-out = 3

@Test
Temperature
0°C
+25°C
+75°C

			TEST VOLTAGE/CURRENT VALUES					dV _{in}	V _{CC} (Gnd)
			V _{dC} ±1.0%				mAdc		
			V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L		
			-5.2 to -1.350	-1.070 to -0.740	-	-5.2	-2.5		
			-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5		
			-5.2 to -1.260	-0.950 to -0.615	-	-5.2	-2.5		
			TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:						
Characteristic	Symbol	Pin Under Test	V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L		
Power Supply Drain Current	I _E	7	-	-	-	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12	-	-	
Input Current	I _{in}	2	-	-	2	3, 4, 5, 6, 7, 8, 9, 10, 11, 12	-	-	
		3	-	-	3	2, 4, 5, 6, 7, 8, 9, 10, 11, 12	-	-	
		4	-	-	4	2, 3, 5, 6, 7, 8, 9, 10, 11, 12	-	-	
		5	-	-	5	2, 3, 4, 6, 7, 8, 9, 10, 11, 12	-	-	
		6	-	-	6	2, 3, 4, 5, 7, 8, 9, 10, 11, 12	-	-	
		8	-	-	8	2, 3, 4, 5, 6, 7, 9, 10, 11, 12	-	-	
		9	-	-	9	2, 3, 4, 5, 6, 7, 8, 10, 11, 12	-	-	
		10	-	-	10	2, 3, 4, 5, 6, 7, 8, 9, 11, 12	-	-	
		11	-	-	11	2, 3, 4, 5, 6, 7, 8, 9, 10, 12	-	-	
		12	-	-	12	2, 3, 4, 5, 6, 7, 8, 9, 10, 11	-	-	
Input Leakage Current	I _R	Inputs*	-	-	-	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12	-	-	
"Q" Logical "1" Output Voltage [†]	V _{OH} [†]	13	-	-	2 ①	3, 4, 5, 6, 7, 8, 9, 10, 11, 12	13	-	
"Q" Logical "0" Output Voltage	V _{OL}	13	-	-	12 ②	2, 3, 4, 5, 6, 7, 8, 9, 10, 11	-	-	
"Q̄" Logical "1" Output Voltage [†]	V _{OH} [†]	1	-	-	12 ②	2, 3, 4, 5, 6, 7, 8, 9, 10, 11	1	-	
"Q̄" Logical "0" Output Voltage	V _{OL}	1	-	-	2 ①	3, 4, 5, 6, 7, 8, 9, 10, 11, 12	-	-	
"Q" or "Q̄" Latch Voltage	V _L	2	-	-	-	3, 4, 5, 6, 7, 8, 9, 10, 11	-	2 ③	
		12	-	-	-	3, 4, 5, 6, 7, 8, 9, 10, 11	-	12 ③	
Input Toggle Frequency (See Figures 3 & 4)	f _{Tog}	13	Pulse In	Pulse Out	-	2, 3, 4, 5, 7, 9, 10, 11, 12	-	-	
			6, 8	13					
Sensitivity (No Toggle)	-	1 13	6, 8	1	-	↓	-	-	
			6, 8	13	-	↓	-	-	
Sensitivity (Toggle)	-	1, 13	6, 8	1, 13	-	↓	-	-	
Switching Times ^④	Propagation Delay	t ₆₊₁₊	6	1	-	V _{EE} = -4.0 Vdc	-	-	
		t ₆₊₁₋	6	1	-	2, 3, 4, 5, 7, 9, 10, 11, 12	-	-	
	t ₈₊₁₃₊	13	8	13	-	↓	-	-	
	t ₈₊₁₃₋	13	8	13	-	↓	-	-	
	Rise Time	t ₁₊	1	6	1	-	↓	-	-
		t ₁₃₊	13	8	13	-	↓	-	-
	Fall Time	t ₁₋	1	6	1	-	↓	-	-
		t ₁₃₋	13	8	13	-	↓	-	-

FIGURE 1 - SENSITIVITY (NO TOGGLE)

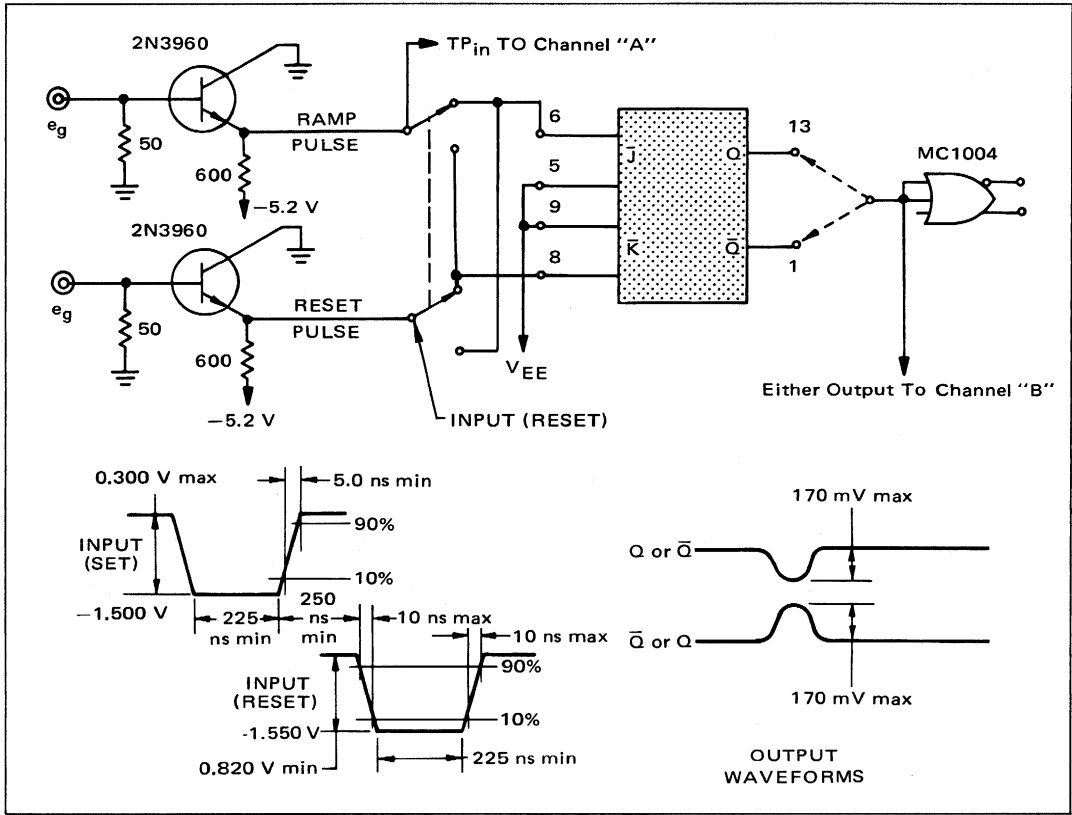
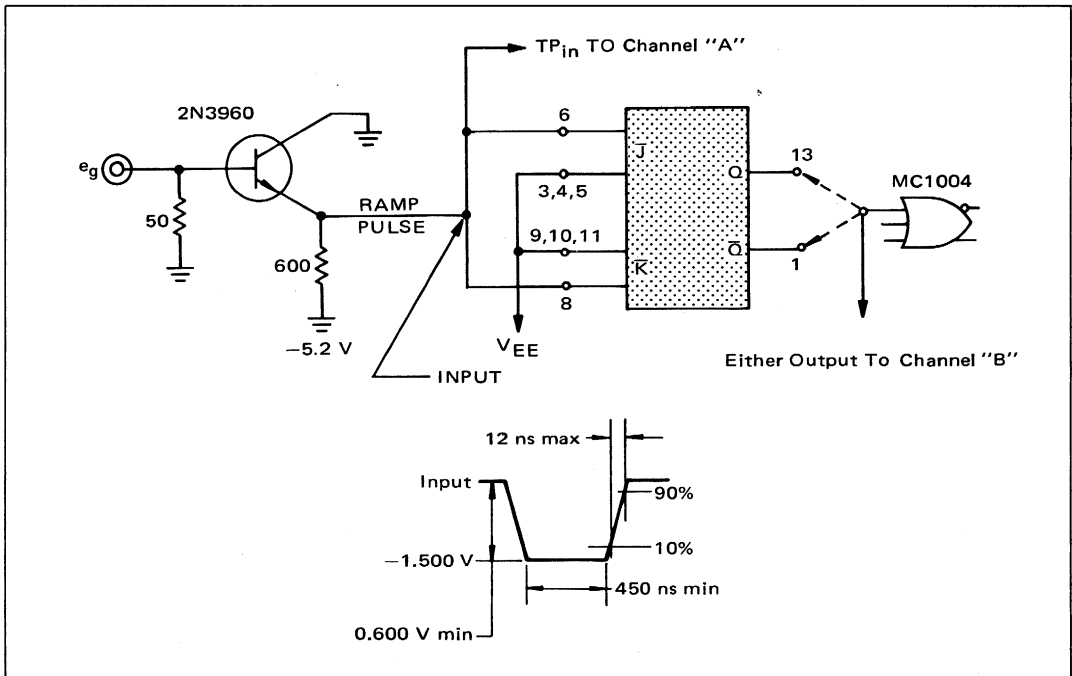


FIGURE 2 - SENSITIVITY (TOGGLE)




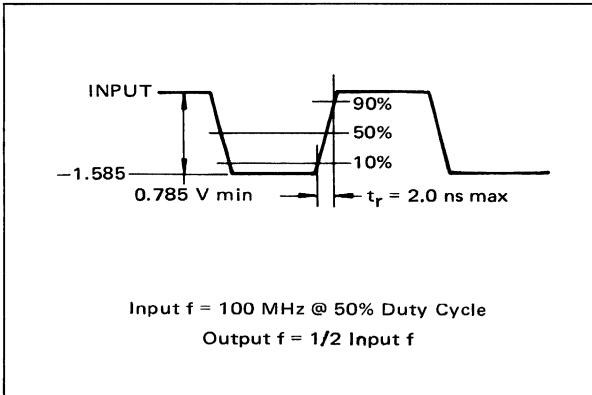


FIGURE 3 - INPUT WAVEFORM TO ESTABLISH MINIMUM TOGGLE FREQUENCY

FIGURE 4 - SWITCHING TIME TEST CIRCUIT AND WAVEFORMS @ 25°C

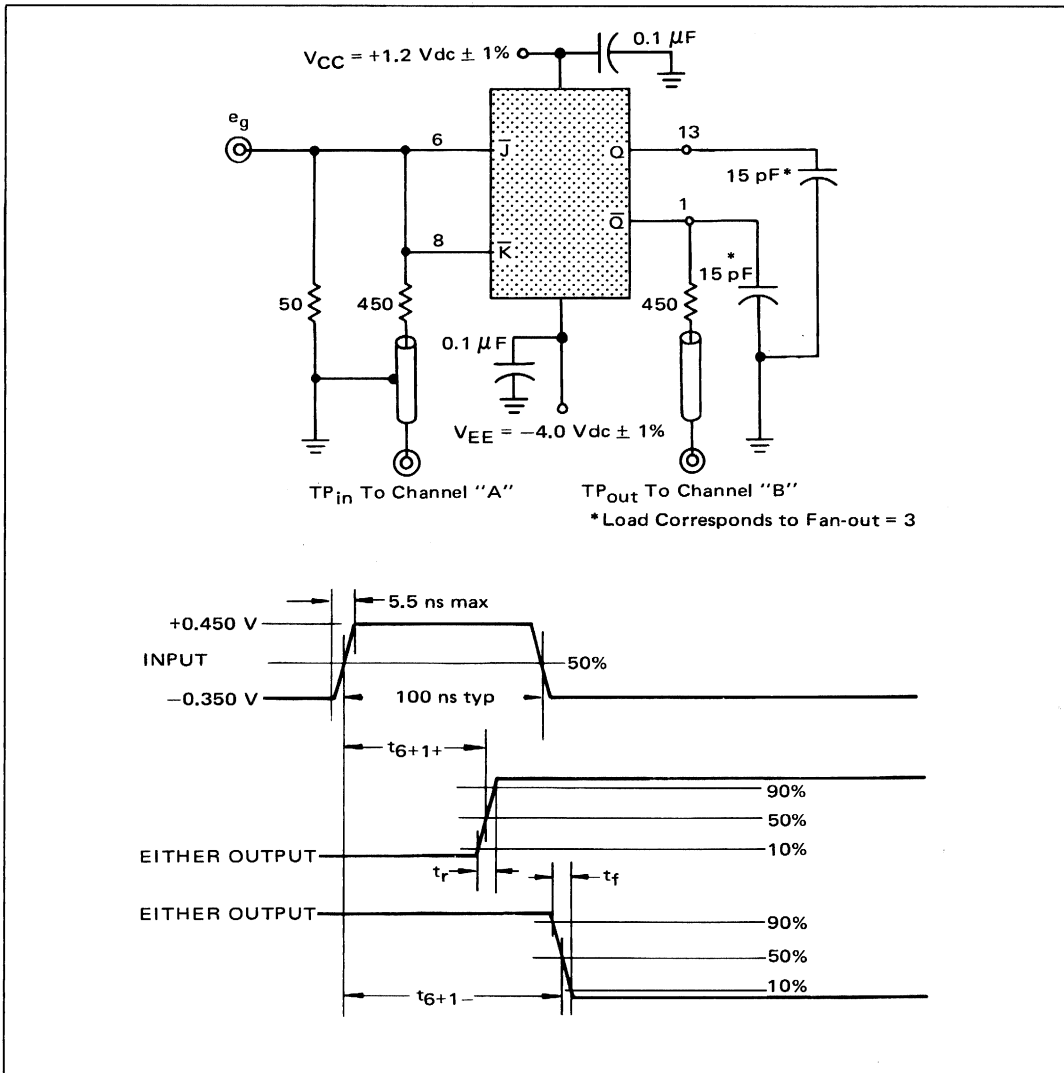


**APPLICATIONS
INFORMATION**

The MC1027 flip-flop is obtained by reducing all resistor values of the MC1013 by a factor of two. The resultant flip-flop is no longer limited by circuit design, but by device speeds. Typically the MC1027 will operate 50% faster than the MC1013. Power dissipation is doubled over that of the MC1013, but circuit operation is the same. The MC1023 clock driver is recommended for driving the MC1027 to its full capability. (The MC1023 high-speed clock driver exhibits propagation delay and rise times of about 2.0 ns when driving five flip-flops.) Maximum operating frequency depends upon layout techniques. Short lead lengths with low impedance lines are recommended. A 100+MHz shift counter is shown in Figure 5.

Operation of the MC1027 is very uniform with negligible variation observed with temperature change from 0°C to +75°C. Propagation delay is nominally 4.5 ns, with rise and fall times varying from 3.5 to 4.0 ns with a load of another flip-flop on the output.

FIGURE 5 - 100 + MHz "SWITCH-TAIL" RING COUNTER

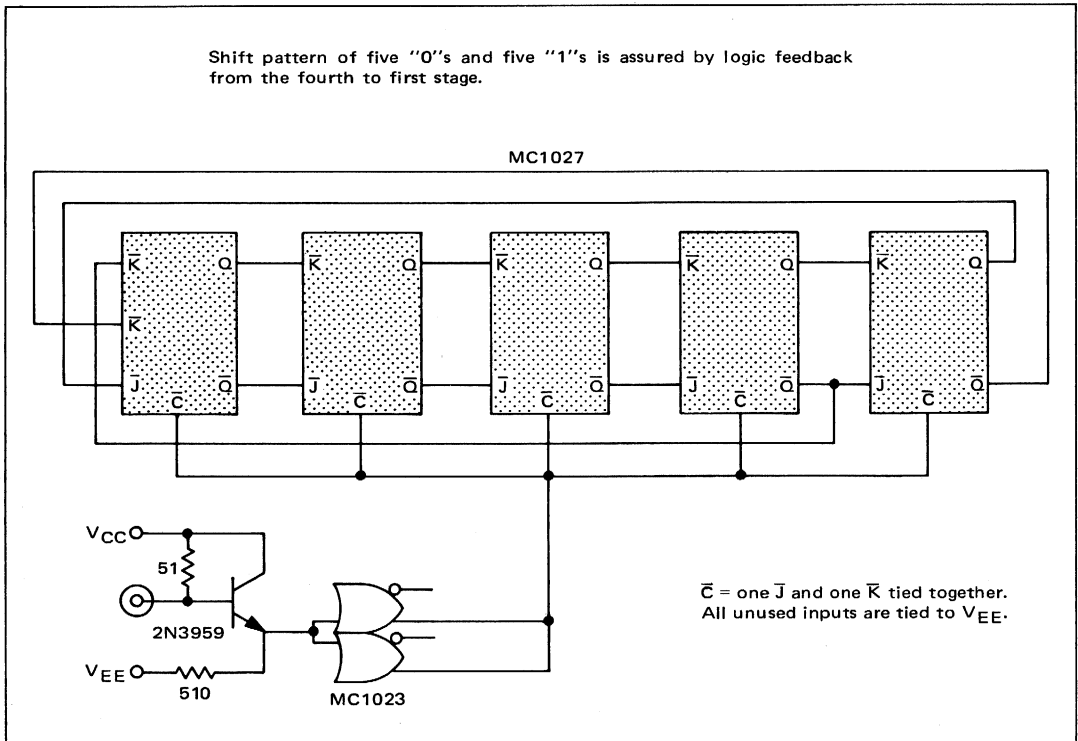


**DUAL R-S FLIP-FLOPS
WITH POSITIVE CLOCK**

MECL II MC1000/1200 series

**MC1014
MC1214**

Two dc Set-Reset flip-flops with a positive clock input provided for each flip-flop. This device is useful as a dual storage element and may be teamed with the MC1015/MC1215 for shift register functions with a minimum number of packages.

POSITIVE LOGIC




TRUTH TABLE

R	S	C	Q ⁿ⁺¹
0	1	1	1
1	0	1	0
0	0	1	Q ⁿ
1	1	1	N.D.
*	*	0	Q ⁿ


*Either State
N.D. = Not Defined

DC Input Loading Factor : C = 1; S, R = 1.5
DC Output Loading Factor = 25
Power Dissipation = 140 mW typical

CIRCUIT SCHEMATIC

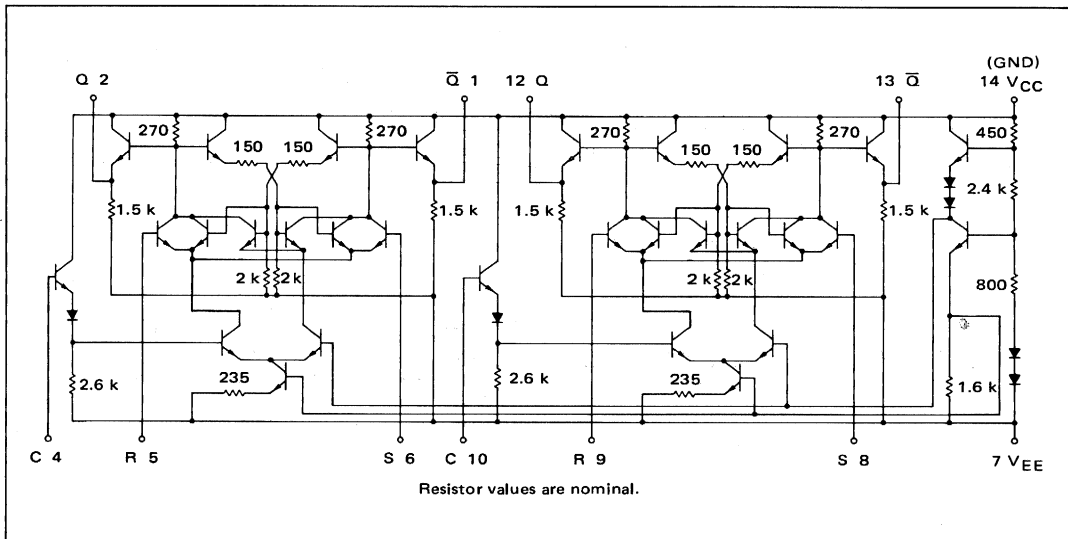


MC1014, MC1214 (continued)



ELECTRICAL CHARACTERISTICS

Test procedures are shown for only one flip-flop. The other flip-flop is tested in the same manner.



Characteristic	Symbol	Pin Under Test	MC1214 Test Limits							MC1014 Test Limits						
			-55°C		+25°C		+125°C		Unit	0°C		+25°C		+75°C		Unit
			Min	Max	Min	Max	Min	Max		Min	Max	Min	Max	Min	Max	
Power Supply Drain Current	I_E	7	-	-	-	36	-	-	mA _{dC}	-	-	-	36	-	-	mA _{dC}
Input Current	I_{in}	4	-	-	-	100	-	-	μ A _{dC}	-	-	-	100	-	-	μ A _{dC}
		5	-	-	-	150	-	-	μ A _{dC}	-	-	-	150	-	-	μ A _{dC}
		6	-	-	-	150	-	-	μ A _{dC}	-	-	-	150	-	-	μ A _{dC}
Input Leakage Current	I_R	Inputs*	-	-	-	0.2	-	1.0	μ A _{dC}	-	-	-	0.2	-	1.0	μ A _{dC}
"Q" Logical "1" Output Voltage \ddagger	$V_{OH\ddagger}$	2	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	V _{dC}	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	V _{dC}
"Q" Logical "0" Output Voltage	V_{OL}	2	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	V _{dC}	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	V _{dC}
"Q-bar" Logical "1" Output Voltage \ddagger	$V_{OH\ddagger}$	1	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	V _{dC}	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	V _{dC}
"Q-bar" Logical "0" Output Voltage	V_{OL}	1	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	V _{dC}	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	V _{dC}
Switching Times (Fan-Out = 3)	Clock Inputs	Propagation Delay	Typ	Max	Typ	Max	Typ	Max	ns	Typ	Max	Typ	Max	Typ	Max	ns
			Max	Max	Max	Max	Max	Max		Max	Max	Max	Max	Max		
Rise Time	t_{1+}	1	↓	↓	↓	↓	↓	10.0	↓	↓	↓	↓	↓	↓	↓	↓
		2	↓	↓	↓	↓	↓	10.0	↓	↓	↓	↓	↓	↓	↓	
		1	5.0	8.5	5.0	8.5	7.0	11.5	↓	↓	↓	↓	↓	↓	↓	↓
		2	5.0	8.5	↓	↓	8.0	11.5	↓	↓	↓	↓	↓	↓	↓	↓
Fall Time	t_{1-}	1	5.0	8.5	5.0	8.5	7.0	11.5	↓	↓	↓	↓	↓	↓	↓	↓
		2	5.0	8.5	↓	↓	8.0	11.5	↓	↓	↓	↓	↓	↓	↓	↓
		1	5.0	8.0	5.0	8.0	7.0	10.5	ns	5.0	8.0	5.0	8.0	6.0	9.0	ns
		2	↓	↓	↓	↓	↓	10.0	↓	↓	↓	↓	↓	↓	8.5	↓
Rise Time	t_{1+}	1	6.0	9.0	6.0	9.0	8.0	10.0	↓	6.0	9.0	6.0	9.0	7.0	9.5	↓
		2	6.0	9.0	6.0	9.0	8.0	10.0	↓	6.0	9.0	6.0	9.0	7.0	9.5	↓
		1	5.0	8.5	5.0	8.5	7.0	11.5	↓	5.0	8.5	5.0	8.5	6.0	10.0	↓
		2	5.0	8.5	5.0	8.5	7.0	11.5	↓	5.0	8.5	5.0	8.5	6.0	10.0	↓

* Individually test each input using the pin connections shown.
 $\ddagger V_{OH}$ limits apply from no load (0 mA) to full load (-2.5 mA).

APPLICATIONS INFORMATION

The MC1014/MC1214 is a dual R-S flip-flop with a positive clock input for each flip-flop. An extra level of gating is accomplished with only 2.0 ns increase in propagation delay. This device may be used with the MC1015/MC1215 negative-clock R-S flip-flop in a single-phase clocked master-slave type of shift register as shown in Figure 1.

			TEST VOLTAGE/CURRENT VALUES						V_{CC} (Gnd)			
			$V_{dc} \pm 1.0\%$				$V \pm 50 \text{ mV}$	mAdc				
			$V_{IL \text{ min}}$ to $V_{IL \text{ max}}$	$V_{IH \text{ min}}$ to $V_{IH \text{ max}}$	$V_{IH \text{ max}}$	V_{EE}	V_{BB}	I_L				
MC1214	@Test Temperature	-55°C	-5.2 to -1.405	-1.165 to -0.825	-	-5.2	-1.270	-2.5				
		+25°C	-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-1.175	-2.5				
		+125°C	-5.2 to -1.205	-0.875 to -0.530	-	-5.2	-1.025	-2.5				
MC1014		0°C	-5.2 to -1.350	-1.070 to -0.740	-	-5.2	-1.210	-2.5				
		+25°C	-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-1.175	-2.5				
		+75°C	-5.2 to -1.260	-0.950 to -0.615	-	-5.2	-1.115	-2.5				
			TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:									
Characteristic	Symbol	Pin Under Test	$V_{IL \text{ min}}$ to $V_{IL \text{ max}}$	$V_{IH \text{ min}}$ to $V_{IH \text{ max}}$	$V_{IH \text{ max}}$	V_{EE}	V_{BB}	I_L	V_{CC} (Gnd)			
Power Supply Drain Current	I_E	7	-	4, 10	-	5, 6, 7, 8, 9	-	-	14			
Input Current	I_{in}	4	-	-	4	5, 6, 7, 8, 9, 10	-	-	14			
		5	-	-	4, 5	6, 7, 8, 9, 10	-	-	14			
		6	-	-	4, 6	5, 7, 8, 9, 10	-	-	14			
Input Leakage Current	I_R	Inputs*	-	-	-	4, 5, 6, 7, 8, 9, 10	-	-	14			
"Q" Logical "1" Output Voltage \dagger	$V_{OH\dagger}$	2	-	4, 6	-	5, 7, 8, 9, 10	5	2	14			
"Q" Logical "0" Output Voltage	V_{OL}	2	-	4, 5	-	4, 7, 8, 9, 10	6	-	14			
" \bar{Q} " Logical "1" Output Voltage \dagger	$V_{OH\dagger}$	1	-	4, 5	-	4, 7, 8, 9, 10	6	1	14			
" \bar{Q} " Logical "0" Output Voltage	V_{OL}	1	-	4, 6	-	5, 7, 8, 9, 10	5	-	14			
Switching Times (Fan-Out = 3) Clock Inputs Propagation Delay			Pulse In		$V_{IH \text{ min}} + 1.2 \text{ Vdc}$	Pulse Out	$V_{EE} = -4.0 \text{ Vdc}$			(+1.2V)		
			Clock Inputs Propagation Delay	t_{4+1-}	1	4	-	1	5, 6, 7, 8, 9, 10	-	-	14
				t_{4+1+}	1	-	-	1	-	-	-	-
			Rise Time	t_{4+2+}	2	-	-	2	-	-	-	-
				t_{4+2-}	2	-	-	2	-	-	-	-
			Fall Time	t_{1+}	1	-	-	1	-	-	-	-
				t_{2+}	2	-	-	2	-	-	-	-
			Set-Reset Inputs Propagation Delay	t_{1-}	1	-	-	1	-	-	-	-
				t_{2-}	2	-	-	2	-	-	-	-
			Rise Time	t_{6+1-}	1	6	4	-	7, 8, 9, 10	-	-	14
				t_{5+1+}	1	5	-	1	-	-	-	-
				t_{6+2+}	2	6	-	2	-	-	-	-
				t_{5+2-}	2	5	-	2	-	-	-	-
				Fall Time	t_{1+}	1	6	-	1	-	-	-
t_{2+}	2	-			-	2	-	-	-	-		


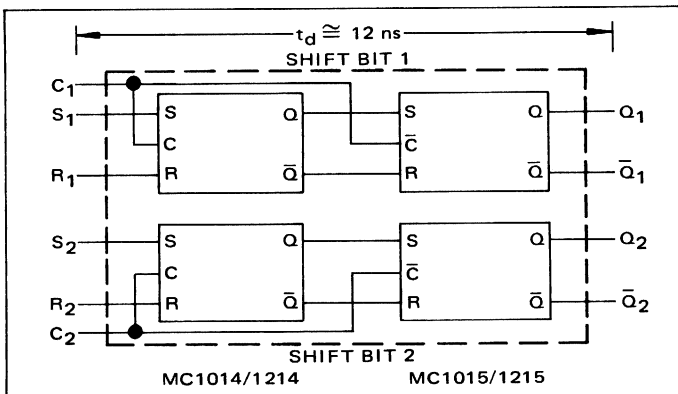



FIGURE 1 - MC1014/MC1214 AND MC1015/
MC1215 CONNECTED TO MAKE TWO
MASTER-SLAVE SHIFT REGISTER
ELEMENTS

MC1014, MC1214 (continued)

SWITCHING TIME TEST CIRCUIT
 $T_A = 25^\circ\text{C}$

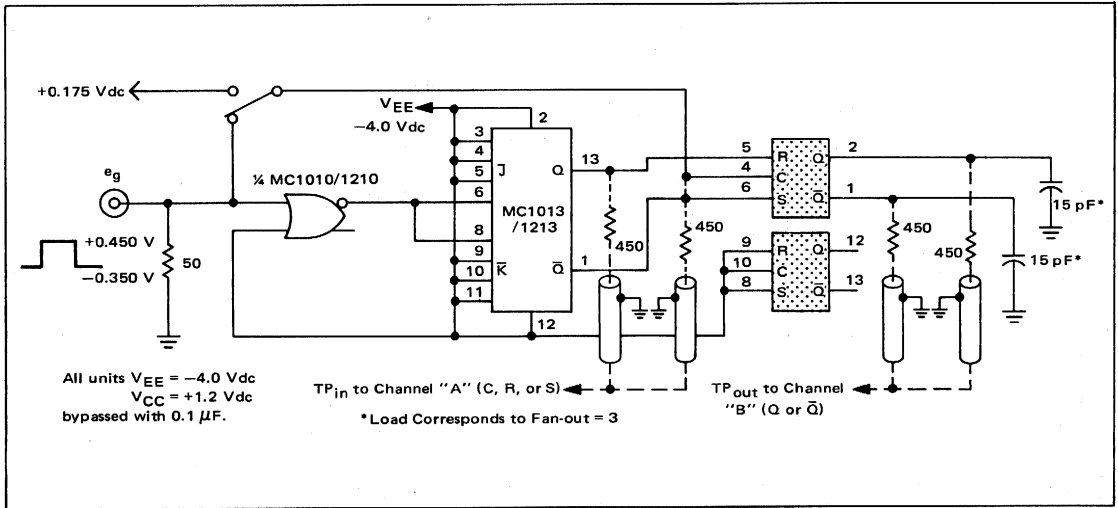

SWITCHING TIME DEFINITIONS AND TIMING DIAGRAM

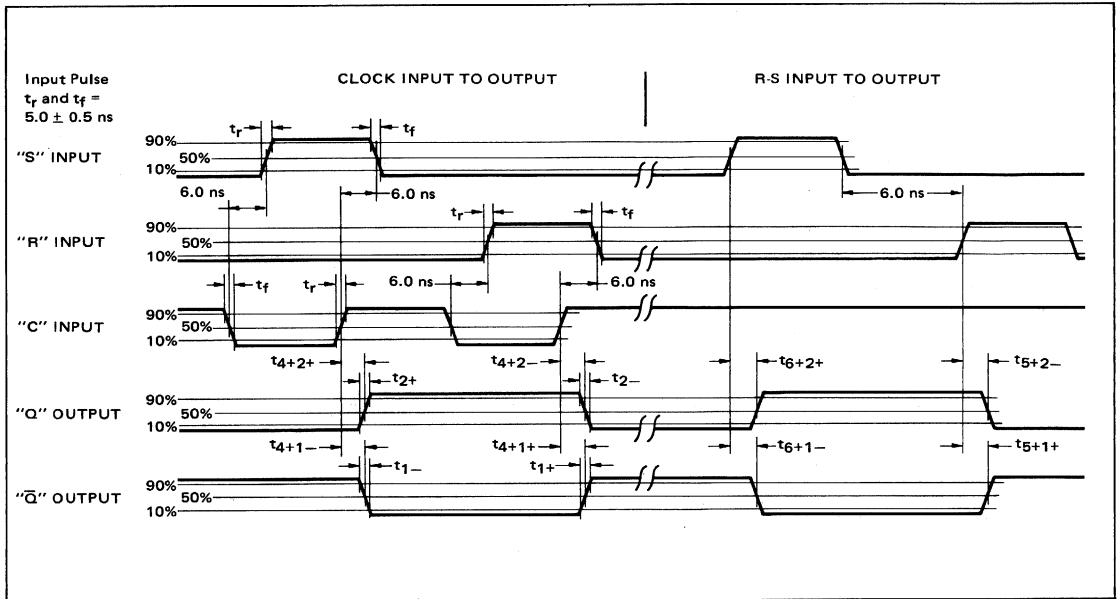


**DUAL R-S FLIP-FLOPS
WITH NEGATIVE CLOCK**

MECL II MC1000/1200 series

**MC1015
MC1215**

Two dc Set-Reset flip-flops with a negative clock input provided for each flip-flop. This unit is useful as a dual storage element and may be teamed with the MC1014/MC1214 for shift register functions with a minimum number of packages.

POSITIVE LOGIC




DC Input Loading Factor : C = 1; S, R = 1.5
DC Output Loading Factor = 25
Power Dissipation = 140 mW typical

TRUTH TABLE


R	S	C	Q ⁿ⁺¹
0	1	0	1
1	0	0	0
0	0	0	Q ⁿ
1	1	0	N.D.
*	*	1	Q ⁿ

*Either State
N.D. = Not Defined

CIRCUIT SCHEMATIC

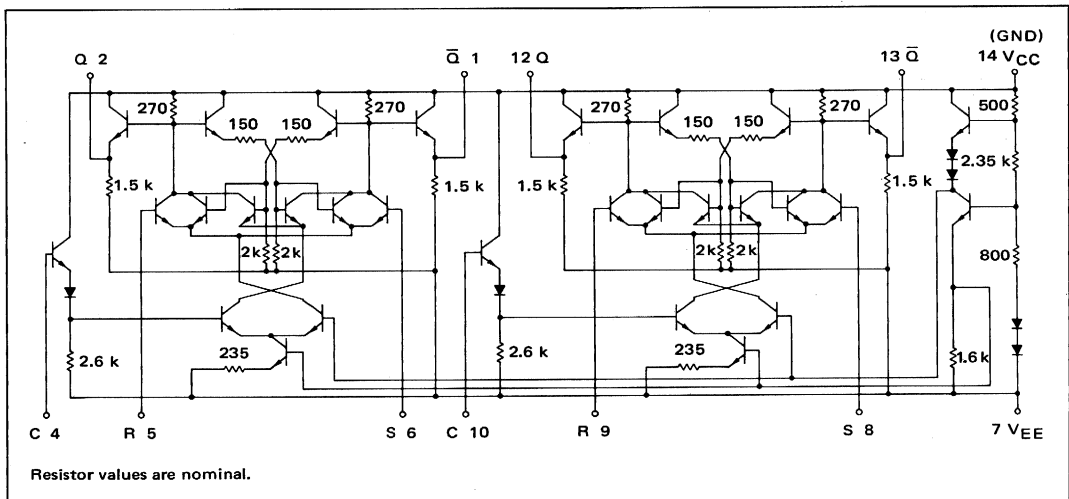

MC1015, MC1215 (continued)



ELECTRICAL CHARACTERISTICS

Test procedures are shown for only one flip-flop.
The other flip-flop is tested in the same manner.

Characteristic	Symbol	Pin Under Test	MC1215 Test Limits								MC1015 Test Limits							
			-55°C		+25°C		+125°C		Unit	0°C		+25°C		+75°C		Unit		
			Min	Max	Min	Max	Min	Max		Min	Max	Min	Max	Min	Max			
Power Supply Drain Current	I_E	7	-	-	-	36	-	-	mAdc	-	-	-	36	-	-	mAdc		
Input Current	I_{in}	4	-	-	-	100	-	-	μ Adc	-	-	-	100	-	-	μ Adc		
		5	-	-	-	150	-	-	μ Adc	-	-	-	150	-	-	μ Adc		
		6	-	-	-	150	-	-	μ Adc	-	-	-	150	-	-	μ Adc		
Input Leakage Current	Inputs*	4, 5, 6	-	-	-	0.2	-	1.0	μ Adc	-	-	-	0.2	-	1.0	μ Adc		
"Q" Logical "1" Output Voltage \ddagger	V_{OH}	2	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	Vdc	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	Vdc		
"Q" Logical "0" Output Voltage	V_{OL}	2	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	Vdc	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	Vdc		
"Q-bar" Logical "1" Output Voltage \ddagger	V_{OH}	1	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	Vdc	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	Vdc		
"Q-bar" Logical "0" Output Voltage	V_{OL}	1	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	Vdc	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	Vdc		
Switching Times (Fan-Out = 3)			Typ	Max	Typ	Max	Typ	Max		Typ	Max	Typ	Max	Typ	Max			
Clock Inputs Propagation Delay	t_{4-1-}	1	6.0	10.0	6.0	10.0	8.0	12.0	ns	6.0	10.0	6.0	10.0	7.0	11.0	ns		
		1	5.0	8.5	5.0	8.5	7.0	10.5		5.0	8.5	5.0	8.5	6.0	9.5			
		2	5.0	8.5	5.0	8.5	7.0	10.5		5.0	8.5	5.0	8.5	6.0	9.5			
		2	6.0	10.0	6.0	10.0	8.0	12.0		6.0	10.0	6.0	10.0	7.0	11.0			
Rise Time	t_{1+}	1	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓		
		2	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓		
Fall Time	t_{1-}	1	5.0	8.5	5.0	8.5	7.0	11.0	↓	5.0	8.5	5.0	8.5	6.0	9.5	↓		
		2	5.0	8.5	5.0	8.5	7.0	11.0	↓	5.0	8.5	5.0	8.5	6.0	9.5	↓		
Set-Reset Inputs Propagation Delay	t_{6+1-}	1	5.0	8.0	5.0	8.0	7.0	11.0	ns	5.0	8.0	5.0	8.0	6.0	9.0	ns		
		1	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓		
		2	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓		
		2	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓		
Rise Time	t_{1+}	1	6.0	9.0	6.0	9.0	↓	↓	↓	6.0	9.0	6.0	9.0	7.0	10.0	↓		
		2	6.0	9.0	↓	9.0	↓	↓	↓	↓	↓	↓	9.0	↓	↓	↓		
Fall Time	t_{1-}	1	5.0	8.0	↓	8.5	8.0	11.5	↓	↓	↓	↓	8.5	↓	↓	↓		
		2	5.0	8.0	↓	8.5	8.0	11.5	↓	↓	↓	↓	8.5	↓	↓	↓		

* Individually test each input using the pin connections shown.
 $\ddagger V_{OH}$ limits apply from no load (0 mA) to full load (-2.5 mA).

APPLICATIONS INFORMATION

The MC1015/MC1215 is a dual R-S flip-flop with a negative clock input for each flip-flop. An extra level of gating is accomplished with only 2.0 ns increase in propagation delay. This device may be used with the MC1014/MC1214 positive-clock R-S flip-flop in a single-phase clocked master-slave type of shift register as shown in Figure 1.

@Test Temperature

MC1215 { -55°C
+25°C
+125°C
MC1015 { 0°C
+25°C
+75°C

		TEST VOLTAGE/CURRENT VALUES																									
		Vdc ±1.0%				±50 mV	mAdc																				
		V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	V _{BB}	I _L																				
		-5.2 to -1.405	-1.165 to -0.825	-	-5.2	-1.270	-2.5																				
		-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-1.175	-2.5																				
		-5.2 to -1.205	-0.875 to -0.530	-	-5.2	-1.025	-2.5																				
		-5.2 to -1.350	-1.070 to -0.740	-	-5.2	-1.210	-2.5																				
		-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-1.175	-2.5																				
		-5.2 to -1.260	-0.950 to -0.615	-	-5.2	-1.115	-2.5																				
		TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:																									
		V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	V _{BB}	I _L	V _{CC} (Gnd)																			
Power Supply Drain Current	I _E	7	-	4, 10	-	5, 6, 7, 8, 9	-	-	14																		
Input Current	I _{in}	4	-	4	5, 6, 7, 8, 9, 10	-	-	-	14																		
		5	-	5	4, 6, 7, 8, 9, 10	-	-	-	14																		
		6	-	6	4, 5, 7, 8, 9, 10	-	-	-	14																		
Input Leakage Current	Inputs*	4, 5, 6	-	-	4, 5, 6, 7, 8, 9, 10	-	-	-	14																		
"Q" Logical "1" Output Voltage†	V _{OH†}	2	4	6	-	5, 7, 8, 9, 10	5	2	14																		
"Q" Logical "0" Output Voltage	V _{OL}	2	4	5	-	4, 7, 8, 9, 10	6	-	14																		
"Q̄" Logical "1" Output Voltage†	V _{OH†}	1	4	5	-	4, 7, 8, 9, 10	6	1	14																		
"Q̄" Logical "0" Output Voltage	V _{OL}	1	4	6	-	5, 7, 8, 9, 10	5	-	14																		
Switching Times (Fan-Out = 3)			V _{IL max} +1.2 Vdc	Pulse In	Pulse Out	V _{EE} = -4.0 Vdc			+1.2V																		
Clock Inputs Propagation Delay	t ₄₋₁₋ t ₄₋₁₊ t ₄₋₂₊ t ₄₋₂₋	1 1 2 2	-	4	1	5, 6, 7, 8, 9, 10	-	-	14																		
										Rise Time	t ₁₊ t ₂₊	1 2	-	-	-	-	-										
																		Fall Time	t ₁₋ t ₂₋	1 2	-	-	-	-			
																									Set-Reset Inputs Propagation Delay	t _{6+1- t₅₊₁₊ t₆₊₂₊ t₅₊₂₋}	1 1 2 2
																		Rise Time	t ₁₊ t ₂₊	1 2	-	-	-	-			
Fall Time	t ₁₋ t ₂₋	1 2	-	-	-	-	-																				


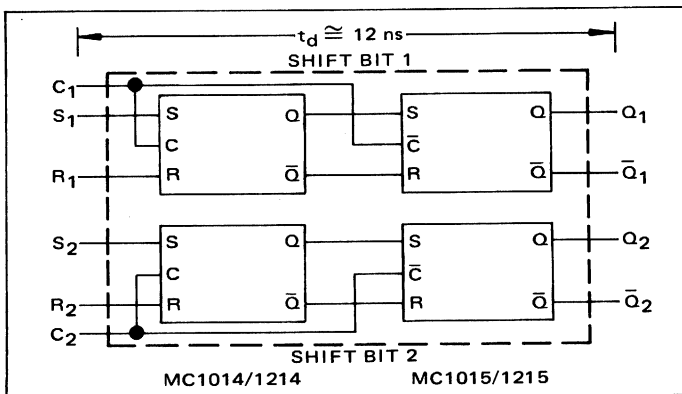



FIGURE 1 - MC1014/MC1214 AND MC1015/MC1215 CONNECTED TO MAKE TWO MASTER-SLAVE SHIFT REGISTER ELEMENTS

MC1015, MC1215 (continued)

SWITCHING TIME TEST CIRCUIT
 $T_A = 25^\circ\text{C}$

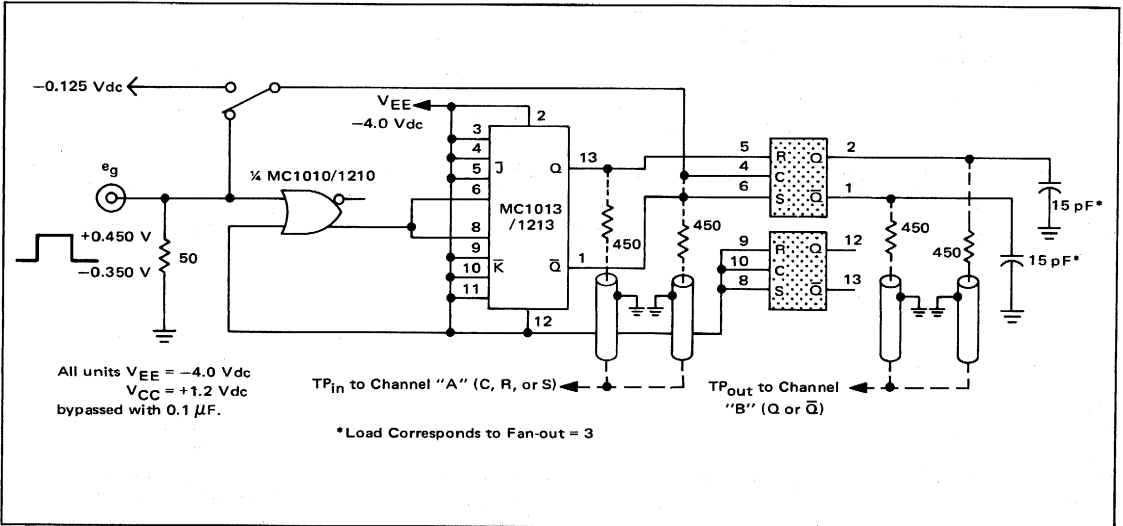

SWITCHING TIME DEFINITIONS AND TIMING DIAGRAM

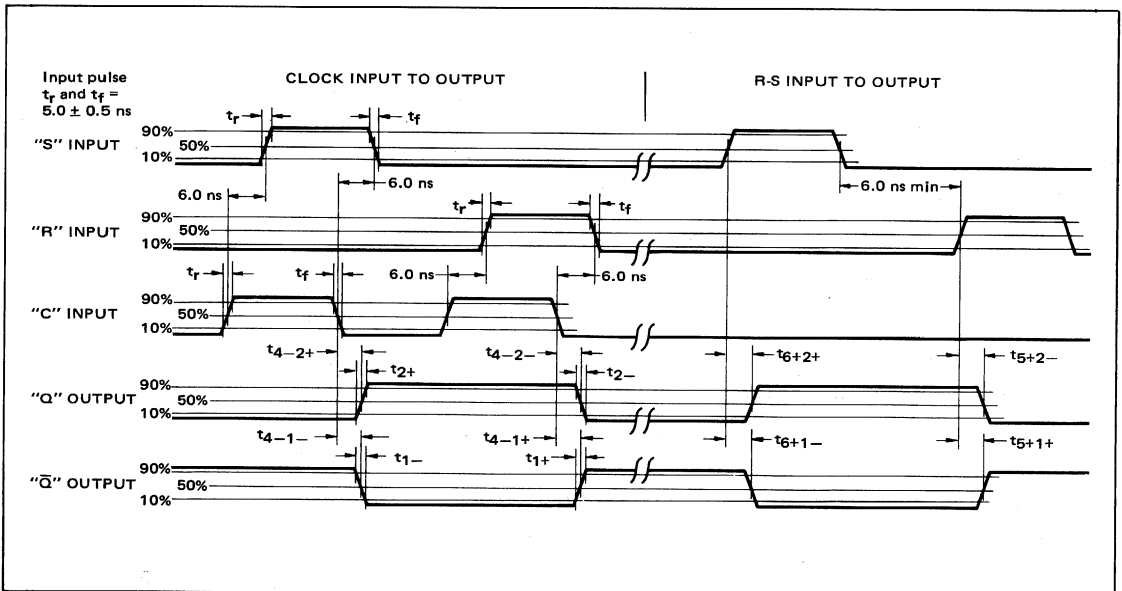


**DUAL R-S FLIP-FLOPS
WITH SINGLE RAIL INPUT
AND NEGATIVE CLOCK**

MECL II MC1000/1200 series

**MC1016
MC1216**

Two dc storage flip-flops with a positive clock input provided for each flip-flop. This device is useful as a dual storage element requiring only a single rail input, as a memory data register, a sample and hold register, or as a clocked R-S flip-flop with no undefined logic state.

POSITIVE LOGIC




DC Input Loading Factor : C = 1; D = 1.5
DC Output Loading Factor = 25
Power Dissipation = 140 mW typical


TRUTH TABLE

D	C	Q ⁿ⁺¹
0	0	Q ⁿ
1	0	Q ⁿ
0	1	0
1	1	1

CIRCUIT SCHEMATIC

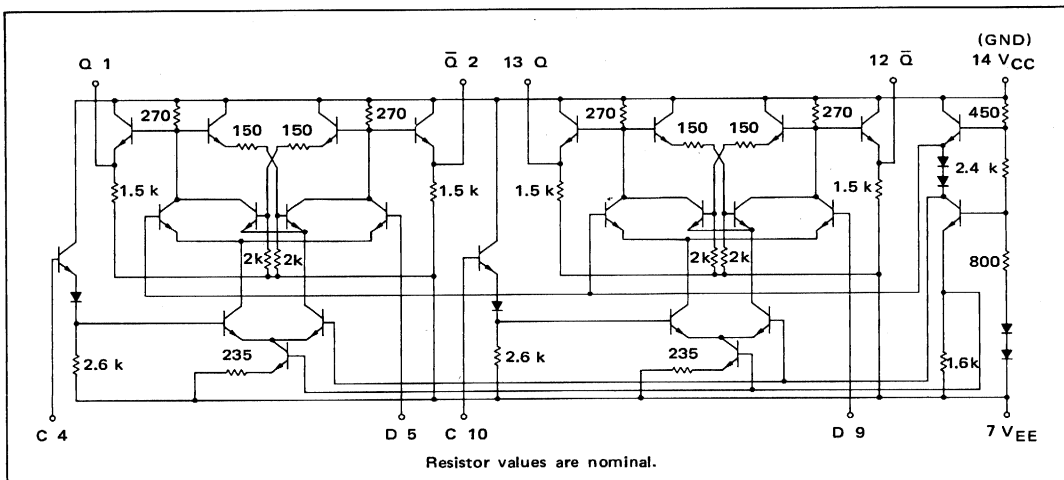

MC1016, MC1216 (continued)



ELECTRICAL CHARACTERISTICS

Test procedures are shown for only one flip-flop. The other flip-flop is tested in the same manner.

Characteristic	Symbol	Pin Under Test	MC1216 Test Limits							MC1016 Test Limits						
			-55°C		+25°C		+125°C		Unit	0°C		+25°C		+75°C		Unit
			Min	Max	Min	Max	Min	Max		Min	Max	Min	Max	Min	Max	
Power Supply Drain Current	I_E	7	-	-	-	36	-	-	mAdc	-	-	-	36	-	-	mAdc
Input Current	I_{in}	4 5	-	-	-	100 150	-	-	μ Adc μ Adc	-	-	-	100 150	-	-	μ Adc μ Adc
Input Leakage Current	I_R	4 5	-	-	-	0.2 0.2	-	1.0 1.0	μ Adc μ Adc	-	-	-	0.2 0.2	-	1.0 1.0	μ Adc μ Adc
"Q" Logical "1" Output Voltage†	V_{OH}^\ddagger	1	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	Vdc	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	Vdc
"Q" Logical "0" Output Voltage	V_{OL}	1	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	Vdc	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	Vdc
"Q-bar" Logical "1" Output Voltage†	V_{OH}^\ddagger	2	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	Vdc	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	Vdc
"Q-bar" Logical "0" Output Voltage	V_{OL}	2	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	Vdc	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	Vdc
Switching Times (Fan-Out = 3) Clock Inputs			Typ	Max	Typ	Max	Typ	Max		Typ	Max	Typ	Max	Typ	Max	
Propagation Delay	t_{4+1-}	1	6.0	9.0	6.0	9.0	7.0	10.5	ns	6.0	9.0	6.0	9.0	6.0	9.5	ns
	t_{4+1+}	1	5.0	8.0	5.0	8.0	6.0	9.5		5.0	8.0	5.0	8.0	5.0	8.5	
	t_{4+2+}	2	5.0	8.0	5.0	8.0	6.0	9.5		5.0	8.0	5.0	8.0	5.0	8.5	
	t_{4+2-}	2	6.0	9.0	6.0	9.0	7.0	10.5		6.0	9.0	6.0	9.0	6.0	9.5	
Rise Time	t_{1+}	1	5.0	7.5	5.0	7.5	6.0	9.5		5.0	7.5	5.0	7.5	5.0	8.0	
	t_{2+}	2	5.0	7.5	5.0	7.5	6.0	9.5		5.0	7.5	5.0	7.5	5.0	8.0	
Fall Time	t_{1-}	1	6.0	8.5	6.0	8.5	7.0	10.5		6.0	8.5	6.0	8.5	6.0	9.5	
	t_{2-}	2	5.0	8.5	5.0	8.5	7.0	10.5		5.0	8.5	5.0	8.5	6.0	9.5	
Set Inputs																
Propagation Delay	t_{5+1+}	1	5.0	8.0	5.0	8.0	6.0	9.5	ns	5.0	8.0	5.0	8.0	5.0	8.5	ns
	t_{5-1-}	1					7.0	10.5								
	t_{5+2-}	2					7.0	10.5								
	t_{5-2+}	2					6.0	9.5								
Rise Time	t_{1+}	1		7.5		7.5		9.0			7.5		7.5		8.0	
	t_{2+}	2		7.5		7.5		9.0			7.5		7.5		8.0	
Fall Time	t_{1-}	1		8.5	6.0	9.0	8.0	11		6.0	9.0	6.0	9.0	7.0	10	
	t_{2-}	2		8.5	6.0	9.0	8.0	11		6.0	9.0	6.0	9.0	7.0	10	

†V_{OH} limits apply from no load (0 mA) to full load (-2.5 mA).

		TEST VOLTAGE/CURRENT VALUES					
		Vdc ±1.0%				mAdc	
@Test Temperature		V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L	
MC1216	-55°C	-5.2 to -1.405	-1.165 to -0.825	-	-5.2	-2.5	
	+25°C	-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5	
	+125°C	-5.2 to -1.205	-0.875 to -0.530	-	-5.2	-2.5	
MC1016	0°C	-5.2 to -1.350	-1.070 to -0.740	-	-5.2	-2.5	
	+25°C	-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5	
	+75°C	-5.2 to -1.260	-0.950 to -0.615	-	-5.2	-2.5	
		TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:					
Characteristic	V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L	V _{CC} (Gnd)	
Power Supply Drain Current	-	4, 10	-	5, 7, 9	-	14	
Input Current	-	-	4	5, 7, 9, 10	-	14	
	-	-	4, 5	7, 9, 10	-	14	
Input Leakage Current	-	-	-	4, 5, 7, 9, 10	-	14	
	-	-	-	4, 5, 7, 9, 10	-	14	
"Q" Logical "1" Output Voltage†	-	4, 5	-	7, 9, 10	1	14	
"Q" Logical "0" Output Voltage	5	4	-	7, 9, 10	-	14	
"Q̄" Logical "1" Output Voltage†	5	4	-	7, 9, 10	2	14	
"Q̄" Logical "0" Output Voltage	-	4, 5	-	7, 9, 10	-	14	
Switching Times (Fan-Out = 3)	Pulse In	V _{IH min} +1.2 Vdc	Pulse Out	V _{EE} = -4.0 Vdc		(+1.2V)	
Clock Inputs							
Propagation Delay	4	-	1	7, 9, 10	-	14	
	↓	-	1	↓	-	↓	
		-	2		-		
		-	2		-		
Rise Time		-	1		-		
		-	2		-		
Fall Time		-	1		-		
	↓	-	2	↓	-	↓	
Set Inputs							
Propagation Delay	5	4	1	7, 9, 10	-	14	
	↓	↓	1	↓	-	↓	
			2		-		
			2		-		
Rise Time			1		-		
			2		-		
Fall Time			1		-		
	↓	↓	2	↓	-	↓	

APPLICATIONS INFORMATION

The MC1016/MC1216 is a single-rail storage element that has no undefined logic state. (Note the change in the truth table over that of the dual-rail type of device, such as MC1014/MC1214 or MC1015/MC1215.) The speed-power product is better than that obtained with any other bipolar technique. An example of a 4-bit storage register with both input and output gating is shown in Figure 1, and an 8-bit buffer register with input gating is shown in Figure 2.

FIGURE 1 - 4-BIT STORAGE REGISTER WITH GATED INPUTS AND OUTPUTS (THREE DEVICES)



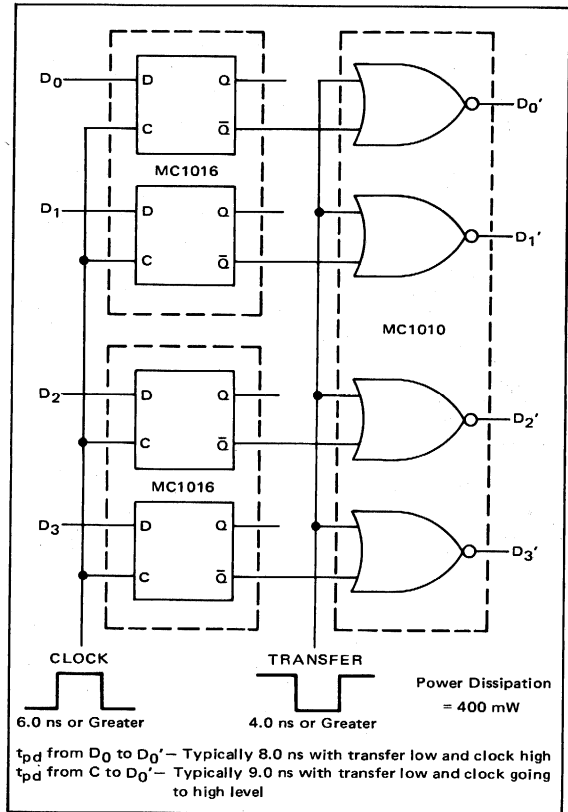



FIGURE 2 - 8-BIT BUFFER REGISTER WITH INPUT GATING (FOUR DEVICES)

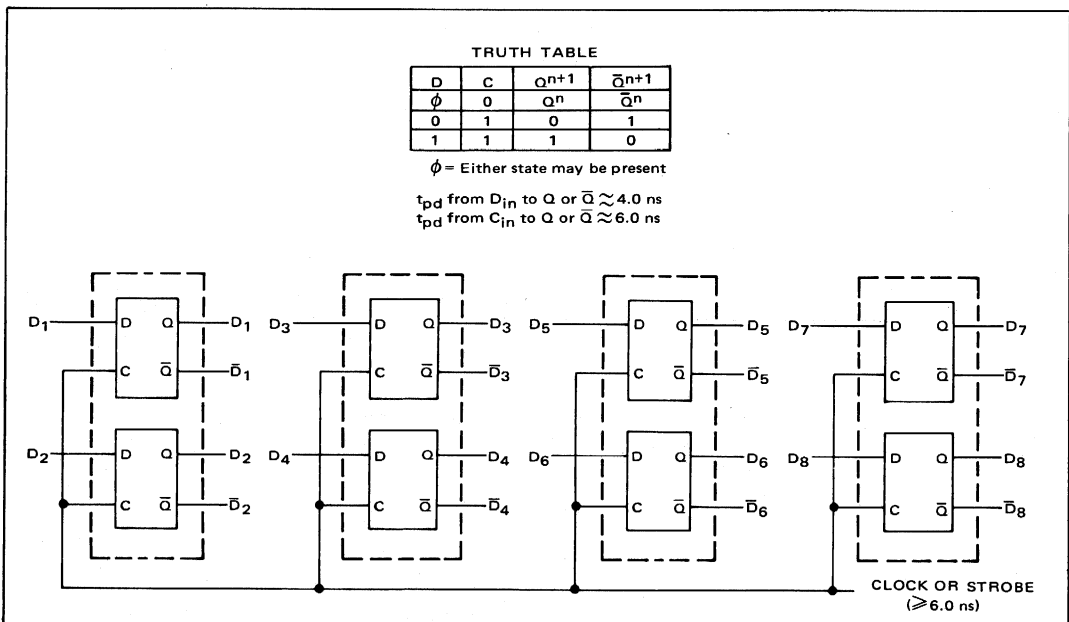

SWITCHING TIME TEST CIRCUIT
 $T_A = 25^\circ\text{C}$

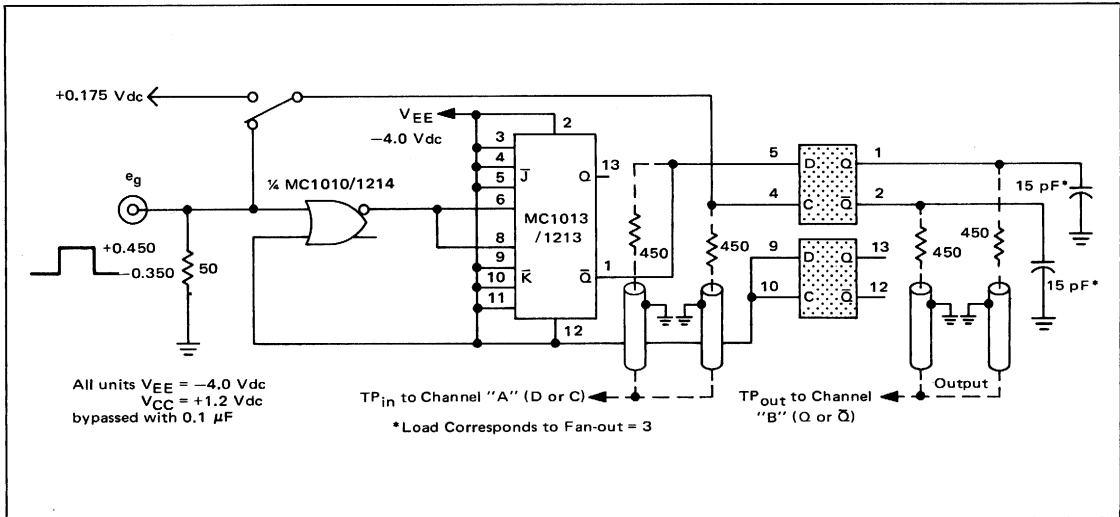

SWITCHING TIME DEFINITIONS AND TIMING DIAGRAM

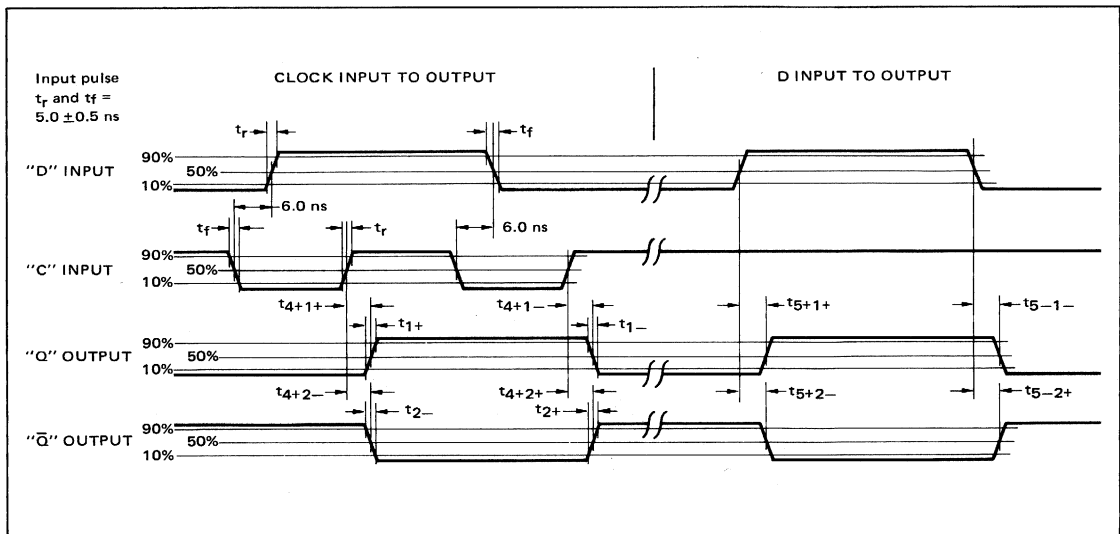


**DUAL R-S FLIP-FLOPS
WITH SINGLE RAIL INPUT
AND POSITIVE CLOCK**

MECL II MC1000/1200 series

**MC1033
MC1233**

Two dc storage flip-flops with a negative clock input provided for each flip-flop. This device is useful as a dual storage element requiring only a single rail input, as a memory data register, a sample and hold register, or as a clocked R-S flip-flop with no undefined logic state. It may be teamed with the MC1016/MC1216 for shift register functions with a minimum number of packages.

POSITIVE LOGIC




TRUTH TABLE


D	C	Q^{n+1}
0	1	Q^n
1	1	Q^n
0	0	0
1	0	1

DC Input Loading Factor: C = 1; D = 1.5
DC Output Loading Factor = 25
Power Dissipation = 140 mW typ

CIRCUIT SCHEMATIC

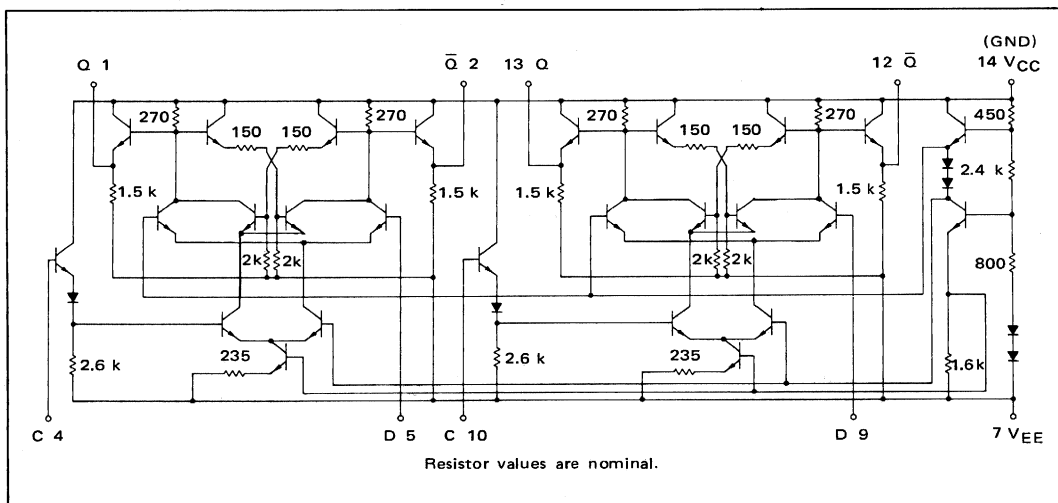

MC1033, MC1233 (continued)



ELECTRICAL CHARACTERISTICS

Test procedures are shown for only one flip-flop. The other flip-flop is tested in the same manner.

Characteristic	Symbol	Pin Under Test	MC1233 Test Limits						Unit	MC1033 Test Limits						
			-55°C		+25°C		+125°C			0°C		+25°C		+75°C		Unit
			Min	Max	Min	Max	Min	Max		Min	Max	Min	Max	Min	Max	
Power Supply Drain Current	I_E	7	-	-	-	36	-	-	mAdc	-	-	-	36	-	-	mAdc
Input Current	I_{in}	4	-	-	-	100	-	-	μ Adc	-	-	-	100	-	-	μ Adc
		5	-	-	-	150	-	-	μ Adc	-	-	-	150	-	-	μ Adc
Input Leakage Current	I_R	4	-	-	-	0.2	-	1.0	μ Adc	-	-	-	0.2	-	1.0	μ Adc
		5	-	-	-	0.2	-	1.0	μ Adc	-	-	-	0.2	-	1.0	μ Adc
"Q" Logical "1" Output Voltage†	V_{OH}^\dagger	1	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	Vdc	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	Vdc
"Q" Logical "0" Output Voltage	V_{OL}	1	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	Vdc	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	Vdc
"Q-bar" Logical "1" Output Voltage†	V_{OH}^\dagger	2	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	Vdc	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	Vdc
"Q-bar" Logical "0" Output Voltage	V_{OL}	2	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	Vdc	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	Vdc
Switching Times* (Fan-Out = 3)			Typ	Max	Typ	Max	Typ	Max		Typ	Max	Typ	Max	Typ	Max	
Clock Inputs Propagation Delay	t_{4-1+}	1	6.0	8.5	6.0	8.5	8.0	10.5	ns	6.0	8.5	6.0	8.5	7.0	9.5	ns
		1	5.0	10	5.0	10	7.0	12		5.0	10	5.0	10	6.0	11	
		2	5.0	8.5	5.0	8.5	7.0	10.5		5.0	8.5	5.0	8.5	6.0	9.5	
		2	6.0	10	6.0	10	8.0	12		6.0	10	6.0	10	7.0	11	
Rise Time	t_{1+}	1	↓	↓	↓	↓	↓	↓		↓	↓	↓	↓	↓	↓	
		2	↓	↓	↓	↓	↓	↓		↓	↓	↓	↓	↓	↓	
Fall Time	t_{2+}	1	5.0	8.5	5.0	8.5	7.0	11		5.0	8.5	5.0	8.5	6.0	9.5	
		2	5.0	8.5	5.0	8.5	7.0	11	↓	5.0	8.5	5.0	8.5	6.0	9.5	↓
Set Inputs Propagation Delay	t_{5+1+}	1	5.0	8.0	5.0	8.0	6.0	9.5	ns	5.0	8.0	5.0	8.0	5.0	8.5	ns
		1	↓	↓	↓	↓	7.0	10.5		↓	↓	↓	↓	↓	↓	
		2	↓	↓	↓	↓	7.0	10.5		↓	↓	↓	↓	↓	↓	
		2	↓	↓	↓	↓	6.0	9.5		↓	↓	↓	↓	↓	↓	
Rise Time	t_{1+}	1	↓	7.5	↓	7.5	↓	9.0		↓	7.5	↓	7.5	↓	8.0	
		2	↓	7.5	↓	7.5	↓	9.0		↓	7.5	↓	7.5	↓	8.0	
Fall Time	t_{1-}	1	↓	8.5	6.0	9.0	8.0	11		6.0	9.0	6.0	9.0	7.0	10	
		2	↓	8.5	6.0	9.0	8.0	11	↓	6.0	9.0	6.0	9.0	7.0	10	↓

† V_{OH} limits apply from no load (0 mA) to full load (-2.5 mA).

@Test
Temperature

MC1233 { -55°C
 +25°C
 +125°C

MC1033 { 0°C
 +25°C
 +75°C

TEST VOLTAGE/CURRENT VALUES						
Vdc ±1.0%					mAdc	
V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L		
-5.2 to -1.405	-1.165 to -0.825	-	-5.2	-2.5		
-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5		
-5.2 to -1.205	-0.875 to -0.530	-	-5.2	-2.5		
-5.2 to -1.350	-1.070 to -0.740	-	-5.2	-2.5		
-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5		
-5.2 to -1.260	-0.950 to -0.615	-	-5.2	-2.5		
TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:						
V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L	V _{CC} (Gnd)	
-	4, 10	-	5, 7, 9	-	14	
-	-	4	5, 7, 9, 10	-	14	
-	-	5	4, 7, 9, 10	-	14	
-	-	-	4, 5, 7, 9, 10	-	14	
-	-	-	4, 5, 7, 9, 10	-	14	
4	5	-	7, 9, 10	1	14	
4, 5	-	-	7, 9, 10	-	14	
4, 5	-	-	7, 9, 10	2	14	
4	5	-	7, 9, 10	-	14	
V _{IL max} +1.2 Vdc	Pulse In	Pulse Out	V _{EE} = -4.0 Vdc			(+1.2V)
4	-	1	7, 9, 10	-	14	
↓	-	1	↓	-	↓	
↓	-	2	↓	-	↓	
↓	-	2	↓	-	↓	
↓	-	1	↓	-	↓	
↓	-	2	↓	-	↓	
↓	-	1	↓	-	↓	
↓	-	2	↓	-	↓	
5	4	1	7, 9, 10	-	14	
↓	↓	1	↓	-	↓	
↓	↓	2	↓	-	↓	
↓	↓	2	↓	-	↓	
↓	↓	1	↓	-	↓	
↓	↓	2	↓	-	↓	
↓	↓	1	↓	-	↓	
↓	↓	2	↓	-	↓	

APPLICATIONS INFORMATION

The MC1033/MC1233 is a single-rail storage element that has no undefined logic state. (Note the change in the truth table over that of the dual-rail type of device, such as MC1014/MC1214 or MC1015/MC1215.) The speed-power product is better than that obtained with any other bipolar technique. An example of a 4-bit storage register with both input and output gating is shown in Figure 1, and an 8-bit buffer register with input gating is shown in Figure 2.

FIGURE 1 - 4-BIT STORAGE REGISTER WITH GATED INPUTS AND OUTPUTS (THREE DEVICES)



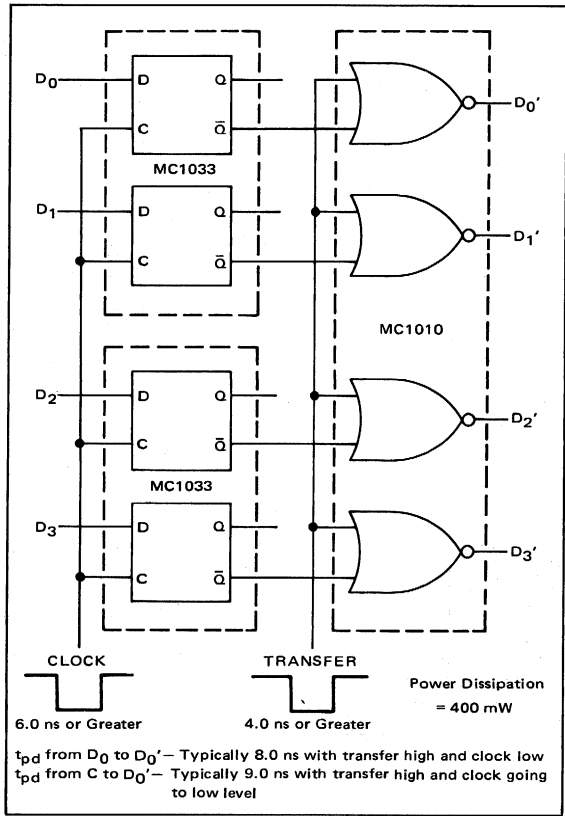


FIGURE 2 - 8-BIT BUFFER REGISTER WITH INPUT GATING (FOUR DEVICES)

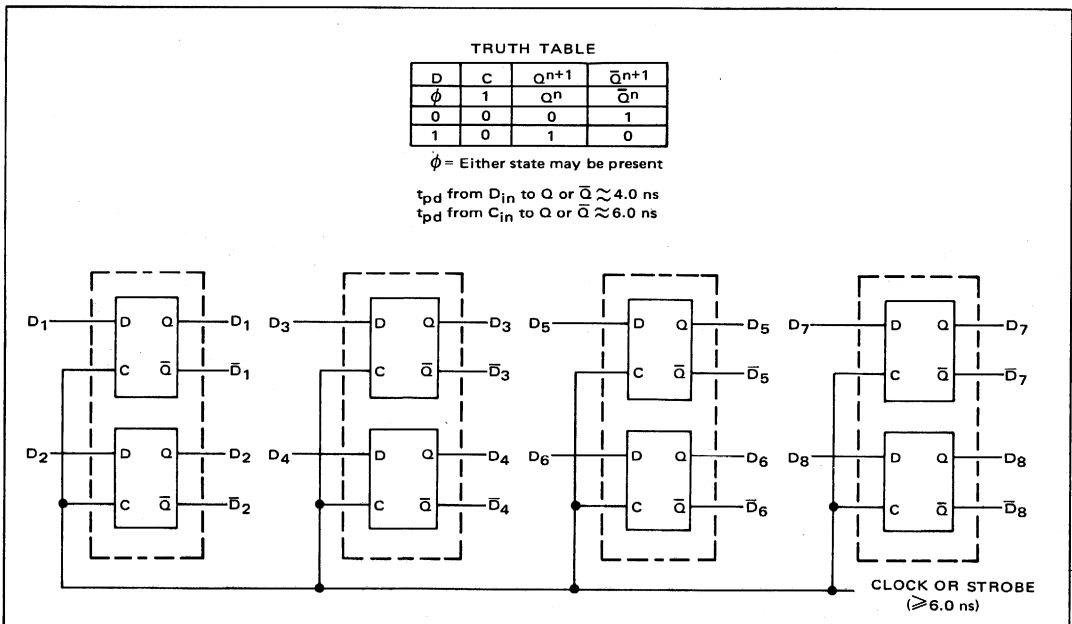


MC1033, MC1233 (continued)

SWITCHING TIME TEST CIRCUIT T_A = 25°C

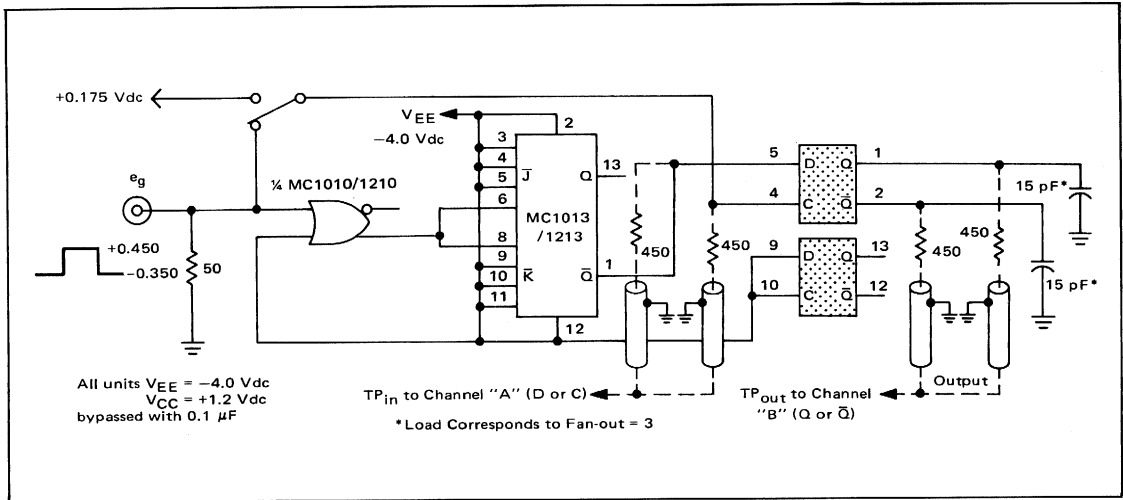

SWITCHING TIME DEFINITIONS AND TIMING DIAGRAM

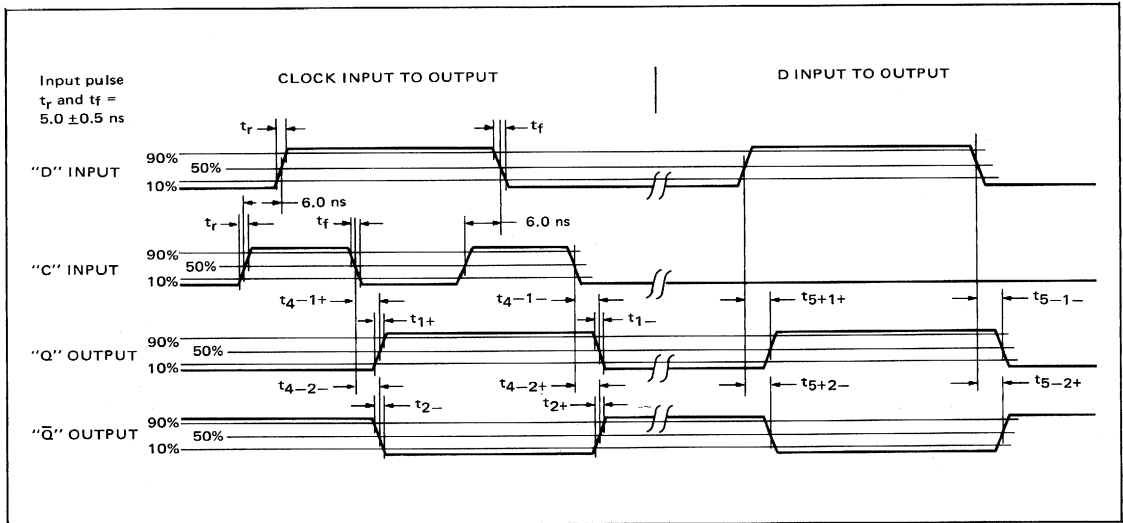


TYPE "D" FLIP-FLOPS

MC1022
MC1222

Designed for clocked-storage operation based on the "master-slave" principle. Operation depends only on voltage levels, therefore the shape of the clock waveform becomes unimportant in determining the state of the flip-flop. When the clock is low, the input data is stored in the "master" and is subsequently transferred to the "slave" when the clock is high, making the data available at the outputs. In this operation the "master" is disabled before the slave is enabled, due to the design of the internal threshold skew. Along with two data and two Clock inputs, the unit provides two SET and two RESET inputs that are independent of the Clock.

POSITIVE LOGIC

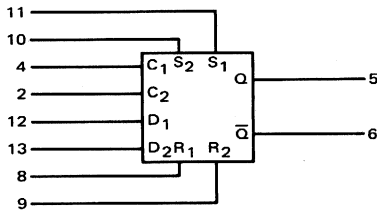

DC Input Loading Factor = 1
DC Output Loading Factor = 25
Power Dissipation = 110 mW typical

R-S TRUTH TABLE

R	S	Q ⁿ⁺¹	Q̄ ⁿ⁺¹
8 or 9	10 or 11	5	6
0	0	Q ⁿ	Q̄ ⁿ
0	1	1	0
1	0	0	1
1	1	N.D.	N.D.


N.D. = Not Defined

CLOCKED TRUTH TABLE

D	C	Q ⁿ⁺¹	Q̄ ⁿ⁺¹
12 or 13	2 or 4	5	6
0	0	Q ⁿ	Q̄ ⁿ
1	0	Q ⁿ	Q̄ ⁿ
0	1*	0	1
1	1*	1	0

*A "1" or Clock input is defined for this flip-flop as a change in level from a low input to a high input.


CIRCUIT SCHEMATIC

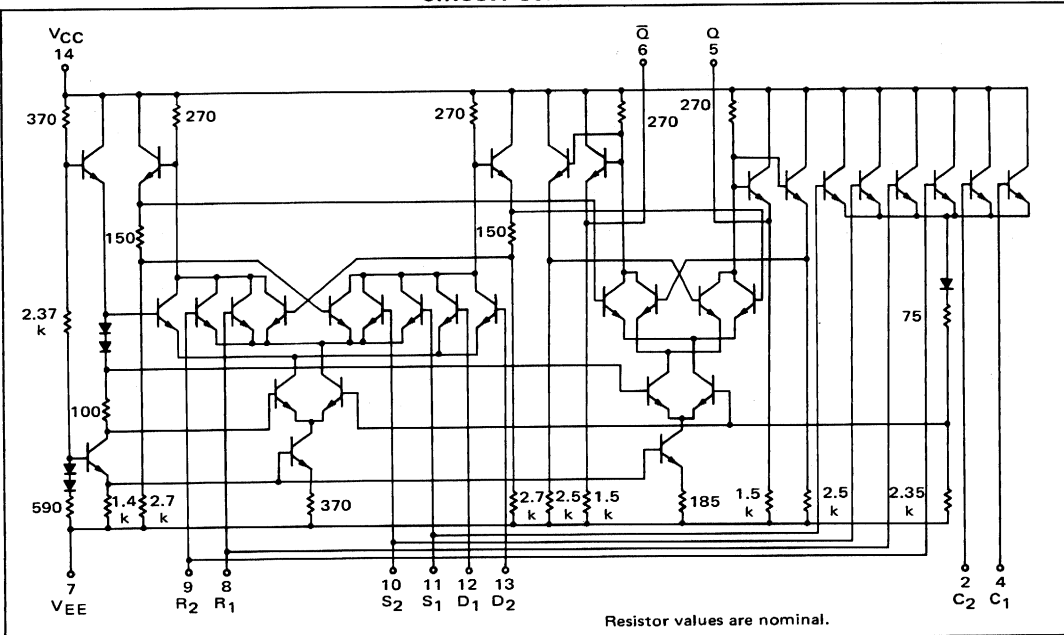

Resistor values are nominal.

MC1022, MC1222 (continued)

ELECTRICAL CHARACTERISTICS



Characteristic	Symbol	Pin Under Test	MC1222 Test Limits						MC1022 Test Limits							
			-55°C		+25°C		+125°C		0°C		+25°C		+75°C		Unit	
			Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
Power Supply Drain Current	I_E	7	-	-	-	27	-	-	mAdc	-	-	-	27	-	-	mAdc
Input Current	I_{in}	2 4 8 9 10 11 12 13	-	-	-	100	-	-	μ Adc	-	-	-	100	-	-	μ Adc
Input Leakage Current	I_R	Inputs*	-	-	-	0.2	-	1.0	μ Adc	-	-	-	0.2	-	1.0	μ Adc
"Q" Logical "1" Output Voltage ‡	$V_{OH} \ddagger$	5 5 †	-0.990 -0.990	-0.825 -0.825	-0.850 -0.850	-0.700 -0.700	-0.700 -0.700	-0.530 -0.530	Vdc Vdc	-0.895 -0.895	-0.740 -0.740	-0.850 -0.850	-0.700 -0.700	-0.775 -0.775	-0.615 -0.615	Vdc Vdc
"Q" Logical "0" Output Voltage	V_{OL}	5 5 †	-1.890 -1.890	-1.580 -1.580	-1.800 -1.800	-1.500 -1.500	-1.720 -1.720	-1.380 -1.380	Vdc Vdc	-1.830 -1.830	-1.525 -1.525	-1.800 -1.800	-1.500 -1.500	-1.760 -1.760	-1.435 -1.435	Vdc Vdc
"Q-bar" Logical "1" Output Voltage ‡	$V_{OH} \ddagger$	6 6 †	-0.990 -0.990	-0.825 -0.825	-0.850 -0.850	-0.700 -0.700	-0.700 -0.700	-0.530 -0.530	Vdc Vdc	-0.895 -0.895	-0.740 -0.740	-0.850 -0.850	-0.700 -0.700	-0.775 -0.775	-0.615 -0.615	Vdc Vdc
"Q-bar" Logical "0" Output Voltage	V_{OL}	6 6 †	-1.890 -1.890	-1.580 -1.580	-1.800 -1.800	-1.500 -1.500	-1.720 -1.720	-1.380 -1.380	Vdc Vdc	-1.830 -1.830	-1.525 -1.525	-1.800 -1.800	-1.500 -1.500	-1.760 -1.760	-1.435 -1.435	Vdc Vdc
Switching Times			Typ	Max	Typ	Max	Typ	Max		Typ	Max	Typ	Max	Typ	Max	
Clock Input Propagation Delay	t_{2+5-}	5	8.0	12	8.0	12	11	15	ns	8.0	12	8.0	12	9.0	13	ns
	t_{2+5+}	5	7.0	11	7.0	11	12	18		7.0	11	7.0	11	9.0	13	
	t_{2+6+}	6	7.0	11	7.0	11	12	18		7.0	11	7.0	11	9.0	13	
	t_{2+6-}	6	8.0	12	8.0	12	11	15		8.0	12	8.0	12	9.0	13	
Rise Time	t_{5+}, t_{6+}	5, 6	5.0	7.5	5.0	8.5	7.0	11		5.0	8.0	5.0	8.5	6.0	9.0	
Fall Time	t_{5-}, t_{6-}	5, 6	7.0	9.5	7.0	11.5	8.0	13		7.0	10.5	7.0	11.5	8.0	12	
Set Input Propagation Delay	t_{10+5+}	5	8.0	12	8.0	13	10	22	ns	8.0	12	8.0	13	10	14	ns
	t_{10+5-}	5	↓	12	8.0	13	10	22	↓	↓	12	8.0	13	10	14	↓
	t_{10+6-}	6	↓	13	9.0	14	11	19	↓	↓	13	9.0	14	11	15	↓
	t_{10+6+}	6	↓	13	9.0	14	11	19	↓	↓	13	9.0	14	11	15	↓
Reset Input Propagation Delay	t_{9+5-}	5	8.0	13	9.0	14	11	19	ns	8.0	13	9.0	14	11	15	ns
	t_{9+5+}	5	↓	13	9.0	14	11	19	↓	↓	13	9.0	14	11	15	↓
	t_{9+6+}	6	↓	12	8.0	13	10	22	↓	↓	12	8.0	13	10	14	↓
	t_{9+6-}	6	↓	12	8.0	13	10	22	↓	↓	12	8.0	13	10	14	↓

* Individually test each input using the pin connections shown.
 † V_{OH} limits apply from no load (0 mA) to full load (-2.5 mA).

‡ Output level to be measured after clock transition on pin 2 or 4 through one positive-going and one negative-going edge. $\left(\square \begin{matrix} V_{IH} \\ V_{IL} \end{matrix} \right)$

MC1022, MC1222 (continued)

@Test
Temperature
MC1222 { -55°C
 +25°C
 +125°C
MC1022 { 0°C
 +25°C
 +75°C

			TEST VOLTAGE/CURRENT VALUES					V _{CC} (Gnd)
			V _{dc} ± 1.0%				mAdc	
			V _{IL}	V _{IH}	V _{IH max}	V _{EE}	I _L	
			-1.580	-0.990	-	-5.2	-2.5	
			-1.500	-0.850	-0.700	-5.2	-2.5	
			-1.380	-0.700	-	-5.2	-2.5	
			-1.525	-0.895	-	-5.2	-2.5	
			-1.500	-0.850	-0.700	-5.2	-2.5	
			-1.435	-0.775	-	-5.2	-2.5	
			TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:					V _{CC} (Gnd)
Characteristic	Symbol	Pin Under Test	V _{IL}	V _{IH}	V _{IH max}	V _{EE}	I _L	
Power Supply Drain Current	I _E	7	-	-	-	2, 4, 7, 8, 9, 10, 11, 12, 13	-	14
Input Current	I _{in}	2	-	-	2	4, 7, 8, 9, 10, 11, 12, 13	-	14
		4	-	-	4	2, 7, 8, 9, 10, 11, 12, 13	-	
		8	-	-	8	2, 4, 7, 9, 10, 11, 12, 13	-	
		9	-	-	9	2, 4, 7, 8, 10, 11, 12, 13	-	
		10	-	-	10	2, 4, 7, 8, 9, 11, 12, 13	-	
		11	-	-	11	2, 4, 7, 8, 9, 10, 12, 13	-	
		12	-	-	12	2, 4, 7, 8, 9, 10, 11, 13	-	
13	-	-	13	2, 4, 7, 8, 9, 10, 11, 12	-			
Input Leakage Current	I _R	Inputs*	-	-	-	2, 4, 7, 8, 9, 10, 11, 12, 13	-	14
"Q" Logical "1" Output Voltage ‡	V _{OH} ‡	5	-	10	-	2, 4, 7, 8, 9, 11, 12, 13	5	14
		5 ‡	-	13	-	2, 7, 8, 9, 10, 11, 12	5	14
"Q" Logical "0" Output Voltage	V _{OL}	5	-	9	-	2, 4, 7, 8, 10, 11, 12, 13	-	14
		5 ‡	13	-	-	4, 7, 8, 9, 10, 11, 12	-	14
"Q̄" Logical "1" Output Voltage ‡	V _{OH} ‡	6	-	8	-	2, 4, 7, 9, 10, 11, 12, 13	6	14
		6 ‡	12	-	-	4, 7, 8, 9, 10, 11, 13	6	14
"Q̄" Logical "0" Output Voltage	V _{OL}	6	-	11	-	2, 4, 7, 8, 9, 10, 12, 13	-	14
		6 ‡	-	12	-	2, 7, 8, 9, 10, 11, 13	-	14
Switching Times Clock Input Propagation Delay	t ₂₊₅₋ t ₂₊₅₊ t ₂₊₆₊ t ₂₊₆₋	5	-	-	Pulse In	V _{EE} - 4.0 Vdc	Pulse Out (+1.2Vdc)	14
		5	-	-	2	4, 7, 8, 9, 10, 11, 12, 13	5	
		6	-	-	↓	↓	6	
		6	-	-	↓	↓	6	
		5, 6	-	-	↓	↓	5, 6	
Rise Time	t ₅₊ , t ₆₊	5, 6	-	-	↓	↓	5, 6	↓
		5, 6	-	-	↓	↓	5, 6	↓
		5, 6	-	-	↓	↓	5, 6	↓
		5, 6	-	-	↓	↓	5, 6	↓
Set Input Propagation Delay	t ₁₀₊₅₊ t ₁₀₊₅₊ t ₁₀₊₆₋ t ₁₀₊₆₋	5	-	2	10	4, 7, 8, 11, 12, 13	5	14
		5	2	-	↓	↓	5	
		6	-	2	↓	↓	6	
		6	2	-	↓	↓	6	
Reset Input Propagation Delay	t ₉₊₅₋ t ₉₊₅₊ t ₉₊₆₊ t ₉₊₆₊	5	-	2	9	4, 7, 8, 11, 12, 13	5	14
		5	2	-	↓	↓	5	
		6	-	2	↓	↓	6	
		6	2	-	↓	↓	6	


MC1022, MC1222 (continued)

APPLICATIONS INFORMATION

The MC1022/MC1222 single-phase Type D flip-flop offers advantages over the J-K flip-flop in applications such as single-rail operation. Since a true master-slave design is utilized, the input data may be asynchronous. There is no chance of data "rippling through" if the clock is in the low state. The SET and RESET inputs are also completely independent of the clock and will override the clock, setting both the master and the slave portions of the flip-flop. All the logic inputs are duplicated and ORed together internally, giving additional flexibility.

A low-level clock state (logic "0") allows information to be transferred to the master portion of the flip-flop through a "D" input. The master will continuously update itself to changing data as long as the clock is at a low level. When the clock goes to the high level, the master is disabled and the data transferred to the slave, thereby becoming available at the outputs. The thresholds of the master and slave portions of the flip-flop are internally offset to give a "raceless" flip-flop (i.e., the master is disabled before the slave is enabled, and vice versa). Thus the flip-flop operation is independent of the rise and fall times of the clock waveforms.


50 MHz SHIFT REGISTER

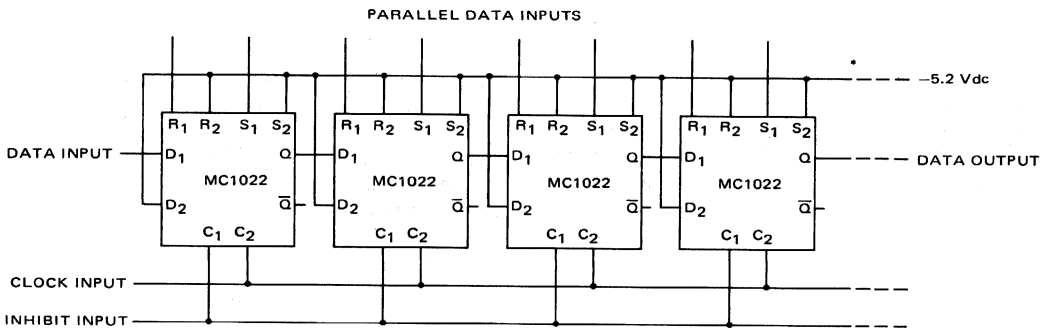

*Unused inputs should be returned to V_{EE} .


A "1" level on the Inhibit input may be used to stop the shifting of data through the register. Parallel data may be brought into the register asynchronously since SET or RESET data internally inhibits the clock.

SWITCHING TIME TEST CIRCUIT ($T_A = 25^\circ\text{C}$)

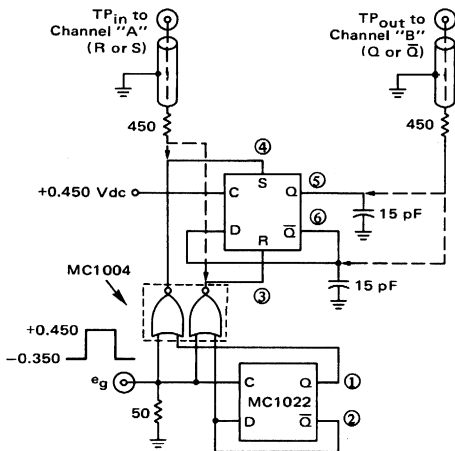

All Units $V_{EE} = -4.0 \text{ Vdc}$
 $V_{CC} = +1.2 \text{ Vdc}$ bypassed with $0.1 \mu\text{F}$
 Unused inputs returned to V_{EE} .

SWITCHING TIME DEFINITIONS AND TIMING DIAGRAM

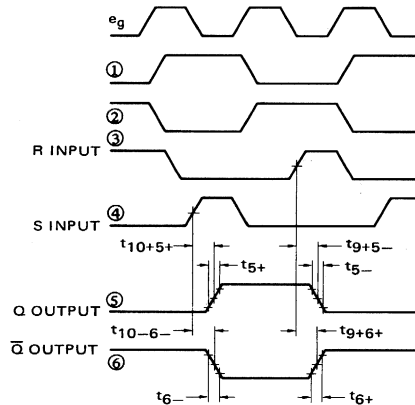


Switching time test circuit and waveforms give method of test with input pulses on pins 9 or 10 and output pulses on pins 5 and 6. Other tests specified and other combinations are tested in same manner and will meet limits specified.

**SATURATED LOGIC-TO-MECL
DUAL TRANSLATORS**


MECL II MC1000/1200 series

**MC1017
MC1217**


Dual level translator intended for converting saturated logic levels to MECL signal levels. The translator provides the positive logic OR function.

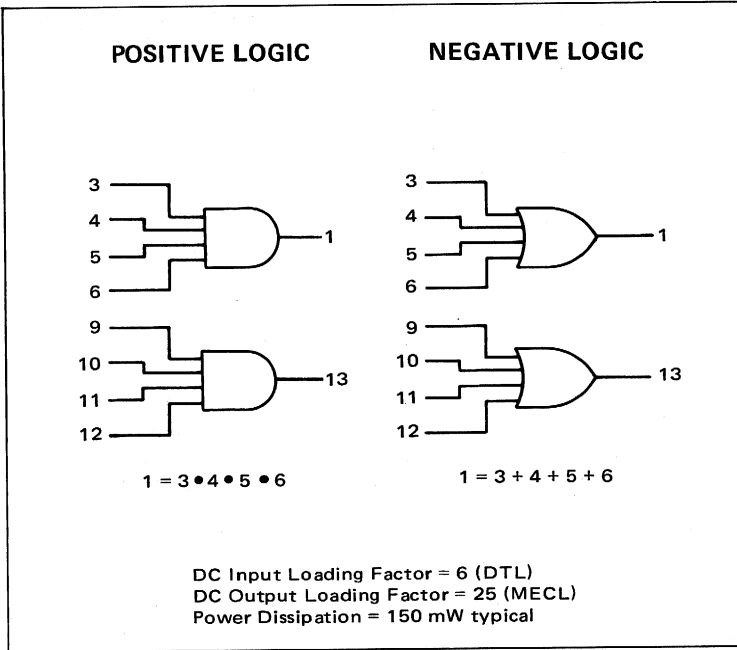

CIRCUIT SCHEMATIC

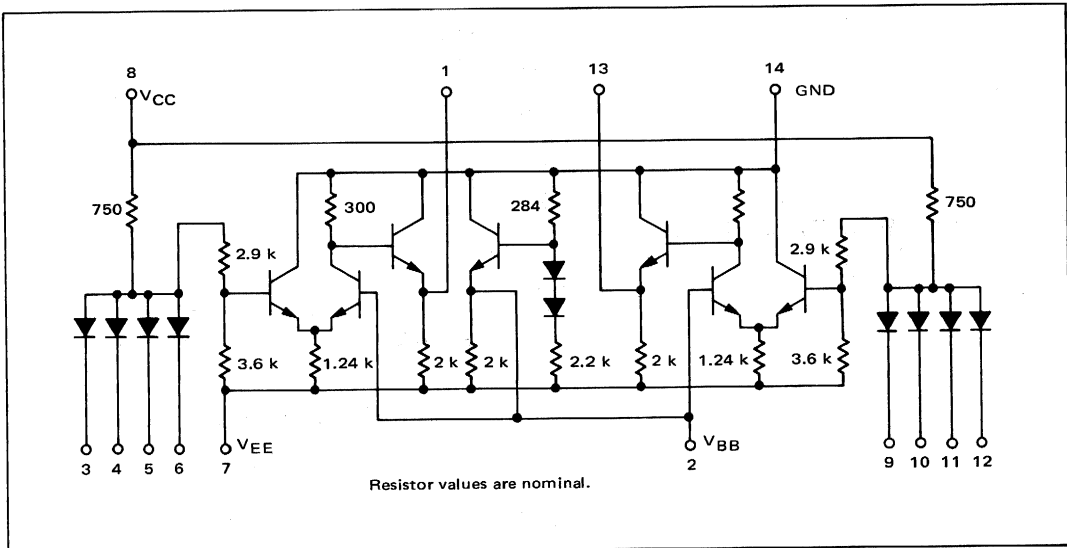

MC1017, MC1217 (continued)



ELECTRICAL CHARACTERISTICS


Test procedures are shown for only one translator.
The other translator is tested in the same manner.

Characteristic	Symbol	Pin Under Test	MC1217 Test Limits						MC1017 Test Limits							
			-55°C		+25°C		+125°C		0°C		+25°C		+75°C		Unit	
			Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
Positive Supply Drain Current	I_C	8	-	-	-	4.0	-	-	mA _{dc}	-	-	-	4.0	-	-	mA _{dc}
Negative Supply Drain Current	I_E	7	-	-	-	24	-	-	mA _{dc}	-	-	-	24	-	-	mA _{dc}
Input Diode Reverse Current	I_R	3	-	-	-	0.2	-	2.0	μA _{dc}	-	-	-	0.2	-	2.0	μA _{dc}
		4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		5	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Input Diode Forward Current	I_F	3	-	-	-	7.5	-	-	mA _{dc}	-	-	-	7.5	-	-	mA _{dc}
		4	-	-	-	-	-	-	-	-	-	-	-	-	-	
		5	-	-	-	-	-	-	-	-	-	-	-	-	-	
		6	-	-	-	-	-	-	-	-	-	-	-	-	-	
"OR" Logical "1" Output Voltage	$V_{OH} †$	1	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	V _{dc}	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	V _{dc}
"OR" Logical "0" Output Voltage	V_{OL}	1	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	V _{dc}	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	V _{dc}
		1	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	
		1	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	
		1	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	
Bias Driver Output Voltage ‡	$V_{BB} †$	2	-1.33	-1.19	-1.23	-1.09	-1.09	-0.95	V _{dc}	-1.28	-1.14	-1.23	-1.09	-1.19	-1.04	V _{dc}
Switching Times	Propagation Delay	1	Typ	Max	Typ	Max	Typ	Max	ns	Typ	Max	Typ	Max	Typ	Max	ns
			17	22	15	20	13	18		16	21	15	20	14	19	
	Rise Time	↓	7.0	10	7.0	10	8.0	12	7.0	10	7.0	10	7.0	11		
			7.0	10	7.0	10	8.0	12	7.0	10	7.0	10	7.0	11		
	Fall Time	↓	7.0	10	7.0	10	8.0	12	7.0	10	7.0	10	7.0	11		

‡ V_{OH} limits apply from no load (0 mA) to full load (-2.5 mA).


† V_{BB} limits apply from no load (0 mA) to full load (-1.0 mA).

SWITCHING TIME TEST CIRCUIT @ 25°C

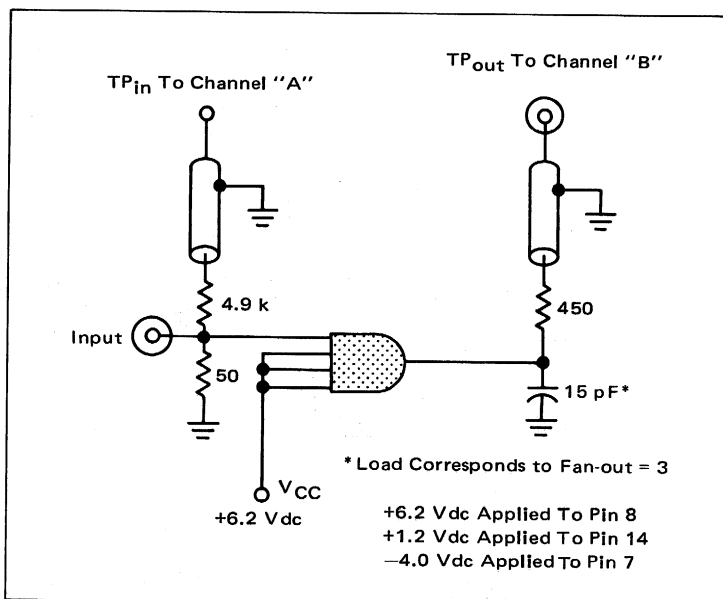

@Test
 Temperature
 MC1217 {
 -55°C
 +25°C
 +125°C
 MC1017 {
 0°C
 +25°C
 +75°C


TEST VOLTAGE/CURRENT VALUES									
V _{dc} ±1.0%						mAdc			
V _{IH}	V _{IL}	V _{max}	V _{CC}	V _{EE}	I _L				
2.1	0.5	-	5.0	-5.2	-2.5				
2.0	1.0	8.0	5.0	-5.2	-2.5				
2.0	0.7	8.0	5.0	-5.2	-2.5				
2.0	0.85	-	5.0	-5.2	-2.5				
1.9	1.00	8.0	5.0	-5.2	-2.5				
1.8	0.85	8.0	5.0	-5.2	-2.5				
TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:									
Characteristic	Symbol	Pin Under Test	V _{IH}	V _{IL}	V _{max}	V _{CC}	V _{EE}	I _L	V _{CC} (Gnd)
Positive Supply Drain Current	I _C	8	-	-	-	8	7	-	14
Negative Supply Drain Current	I _E	7	-	-	-	8	7	-	14
Input Diode Reverse Current	I _R	3	-	-	3	-	-	-	4, 5, 6, 14
		4	-	-	4	-	-	-	3, 5, 6, 14
		5	-	-	5	-	-	-	3, 4, 6, 14
		6	-	-	6	-	-	-	3, 4, 5, 14
Input Diode Forward Current	I _F	3	-	-	-	8	7	-	3, 14
		4	-	-	-	↓	↓	-	4, 14
		5	-	-	-	↓	↓	-	5, 14
		6	-	-	-	↓	↓	-	6, 14
"OR" Logical "1" Output Voltage	V _{OH} †	1	3, 4, 5, 6	-	-	8	7	1	14
"OR" Logical "0" Output Voltage	V _{OL}	1	-	3	-	8	7	-	14
		1	-	4	-	↓	↓	-	↓
		1	-	5	-	↓	↓	-	↓
		1	-	6	-	↓	↓	-	↓
Bias Driver Output Voltage‡	V _{BB} †	2	-	-	-	8	7	2†	14
Switching Times			Pulse In	Pulse Out		(+6.2 V)	(-4.0 V)		(+1.2 V)
Propagation Delay	t ₃₊₁₊ t ₃₋₁₋	1	1	3	-	8	7	-	14
			↓	↓	-	↓	↓	-	↓
Rise Time	t ₁₊	↓							
Fall Time	t ₁₋	↓							

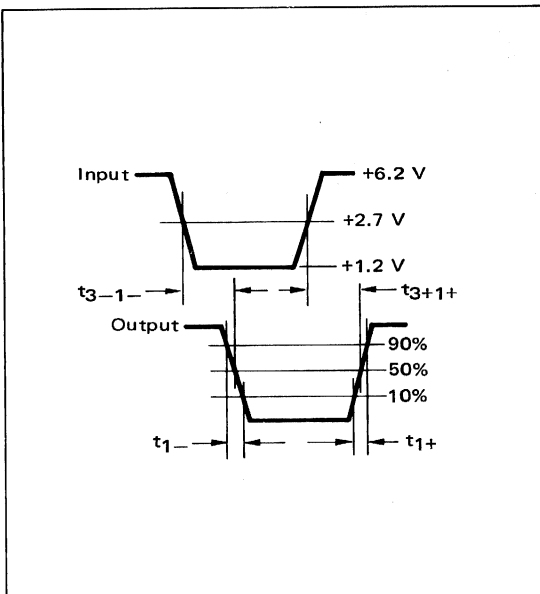


SWITCHING TIME WAVEFORMS

MC1018
MC1218


Level translator intended for converting MECL signal levels to saturated logic levels. The translator will provide the positive logic OR or logic NOR function by connecting the internal bias driver output to the corresponding inputs of the differential amplifier. i.e., when pin 4 is connected to the reference bias, pin 5, pins 6, 10, 11, 12, and 13 become the inputs of a 5-input NOR gate. When pin 6 is connected to the reference bias, pin 5, pins 1, 2, 3, and 4 become the inputs of a 4-input OR gate.

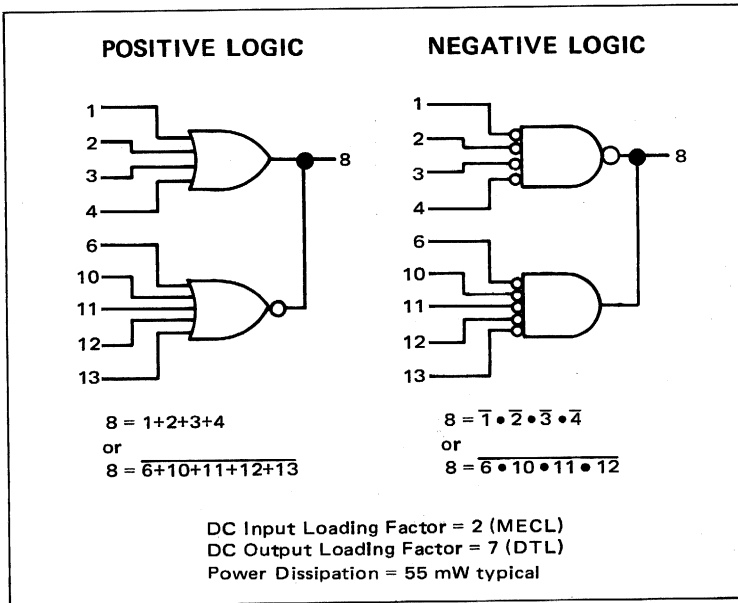

CIRCUIT SCHEMATIC

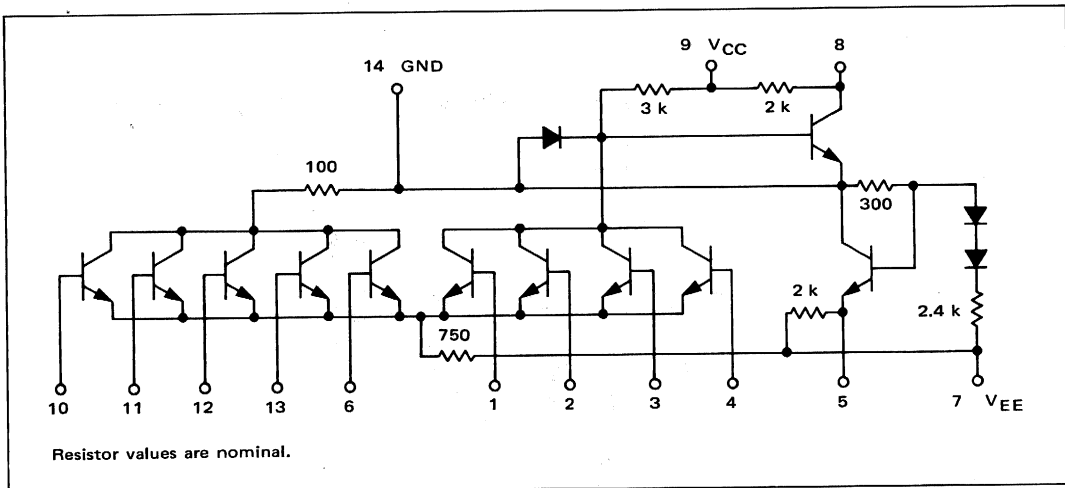

MC1018, MC1218 (continued)




ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Pin Under Test	MC1218 Test Limits							MC1018 Test Limits						
			-55°C		+25°C		+125°C		Unit	0°C		+25°C		+75°C		Unit
			Min	Max	Min	Max	Min	Max		Min	Max	Min	Max	Min	Max	
Positive Supply Drain Current	I_C	9	-	-	-	3.0	-	-	mAde	-	-	-	3.0	-	-	mAde
Negative Supply Drain Current	I_E	7	-	-	-	11.0	-	-	mAde	-	-	-	11.0	-	-	mAde
Input Current	I_{in}	1	-	-	-	200	-	-	μ Ade	-	-	-	200	-	-	μ Ade
		2	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		3	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		10	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		11	-	-	-	-	-	-	-	-	-	-	-	-	-	-
12	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
13	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
Input Leakage Current	I_R	1, 2, 3, 4*	-	-	-	0.2	-	2.0	μ Ade	-	-	-	0.2	-	2.0	μ Ade
		6, 10, 11, 12, 13*	-	-	-	0.2	-	2.0	μ Ade	-	-	-	0.2	-	2.0	μ Ade
Output Voltage High	V_{OH}	8	-	-	4.6	-	4.4	-	Vdc	-	-	4.6	-	4.5	-	Vdc
		↓	-	-	↓	-	↓	-	↓	-	-	↓	-	↓	-	↓
Output Voltage Low	V_{OL}	8	-	0.40	-	0.40	-	0.45	Vdc	-	0.45	-	0.45	-	0.50	Vdc
		↓	-	↓	-	↓	-	↓	-	↓	-	↓	-	↓	-	↓
Bias Driver Output Voltage	V_{BB} ①	5	-1.33	-1.19	-1.23	-1.09	-1.09	-0.95	Vdc	-1.28	-1.14	-1.23	-1.09	-1.19	-1.04	Vdc
Output Short Circuit Current	I_{SC}	8	-	-4.0	-	-3.8	-	-3.6	mAde	-	-3.9	-	-3.8	-	-3.6	mAde
Switching Times	t_{1-8-}	8	Typ	Max	Typ	Max	Typ	Max	ns	Typ	Max	Typ	Max	Typ	Max	ns
			8.0	12	8.0	12	10	14		8.0	12	8.0	12	9.0	13	
			8.0	12	8.0	12	10	14		8.0	12	8.0	12	9.0	13	
			19	25	19	25	19	25		12	25	19	25	19	25	
			19	25	19	25	19	25		19	25	19	25	19	25	

① V_{BB} is supplied from pin 5, and applies from no load (0 mA) to full load (-1.0 mAde)

* Individually test each input using the pin connections shown.

SWITCHING TIME TEST CIRCUIT @ 25°C

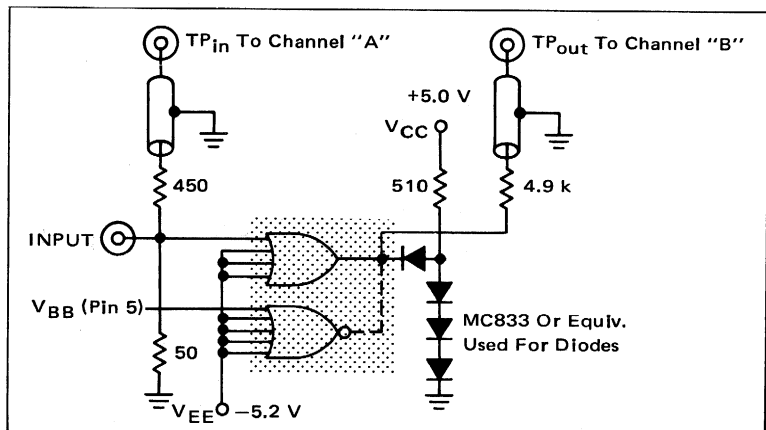


Circuit Shown For OR Configurations. Connect Pin 5 to 4 For NOR.

TEST VOLTAGE/CURRENT VALUES									
V _{dc} ± 1.0%						μA	mAdc		
V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{CC}	V _{EE}	V _{BB}	I _{OH}	I _{OL}	I _L	
-5.2 to -1.405	-1.165 to -0.825	-	5.0	-5.2	①	-120	11.4	-1.0	
-5.2 to -1.325	-1.025 to -0.700	-0.700	5.0	-5.2	①	-120	12.0	-1.0	
-5.2 to -1.205	-0.875 to -0.530	-	5.0	-5.2	①	-120	10.8	-1.0	
-5.2 to -1.350	-1.070 to -0.740	-	5.0	-5.2	①	-120	12.0	-1.0	
-5.2 to -1.325	-1.025 to -0.700	-0.700	5.0	-5.2	①	-120	12.0	-1.0	
-5.2 to -1.260	-0.950 to -0.615	-	5.0	-5.2	①	-120	11.4	-1.0	

@Test Temperature
 MC1218 { -55°C
 +25°C
 +125°C
 MC1018 { 0°C
 +25°C
 +75°C

TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:																		
Characteristic	Pin Under Test	V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{CC}	V _{EE}	V _{BB}	I _{OH}	I _{OL}	I _L	V _{CC} (Gnd)							
Positive Supply Drain Current	9	-	-	-	9	1, 2, 3, 6, 7, 10, 11, 12, 13	4	-	-	-	14							
Negative Supply Drain Current	7	-	-	-	9	1, 2, 3, 6, 7, 10, 11, 12, 13	4	-	-	-	14							
Input Current	1	-	-	1	9	2, 3, 4, 7, 10, 11, 12, 13	6	-	-	-	14							
	2	-	-	2	9	1, 3, 4, 7, 10, 11, 12, 13	6	-	-	-	14							
	3	-	-	3	9	1, 2, 4, 7, 10, 11, 12, 13	6	-	-	-	14							
	4	-	-	4	9	1, 2, 3, 7, 10, 11, 12, 13	6	-	-	-	14							
	6	-	-	6	9	1, 2, 3, 7, 10, 11, 12, 13	4	-	-	-	14							
	10	-	-	10	9	1, 2, 3, 6, 7, 11, 12, 13	4	-	-	-	14							
	11	-	-	11	9	1, 2, 3, 6, 7, 10, 12, 13	4	-	-	-	14							
	12	-	-	12	9	1, 2, 3, 6, 7, 10, 11, 13	4	-	-	-	14							
	13	-	-	13	9	1, 2, 3, 6, 7, 10, 11, 12	4	-	-	-	14							
Input Leakage Current	1, 2, 3, 4*	-	-	-	9	1, 2, 3, 4, 7, 10, 11, 12, 13	6	-	-	-	14							
	6, 10, 11, 12, 13*	-	-	-	9	1, 2, 3, 6, 7, 10, 11, 12, 13	4	-	-	-	14							
Output Voltage High	8	6, 10, 11, 12, 13	-	-	9	1, 2, 3, 7	4	8	-	-	14							
	↓	-	1	-	9	2, 3, 4, 7, 10, 11, 12, 13	6	↓	-	-	14							
	↓	-	2	-	9	1, 3, 4, 7, 10, 11, 12, 13	↓	↓	-	-	14							
	↓	-	3	-	9	1, 2, 4, 7, 10, 11, 12, 13	↓	↓	-	-	14							
Output Voltage Low	8	1, 2, 3, 4	-	-	9	7, 10, 11, 12, 13	6	-	8	-	14							
	↓	-	6	-	9	1, 2, 3, 7, 10, 11, 12, 13	4	-	↓	-	14							
	↓	-	10	-	9	1, 2, 3, 6, 7, 11, 12, 13	↓	↓	-	-	14							
	↓	-	11	-	9	1, 2, 3, 6, 7, 10, 12, 13	↓	↓	-	-	14							
	↓	-	12	-	9	1, 2, 3, 6, 7, 10, 11, 13	↓	↓	-	-	14							
	↓	-	13	-	9	1, 2, 3, 6, 7, 10, 11, 12	↓	↓	-	-	14							
Bias Driver Output Voltage	5	-	-	-	9	7	-	-	-	5	14							
Output Short Circuit Current	8	-	-	4	9	1, 2, 3, 7, 10, 11, 12, 13	6	-	-	-	8, 14							
Switching Times	8	Pulse In		Pulse Out		9	2, 3, 4, 7, 10, 11, 12, 13	6	-	-	-	14						
		1	8	-	9								2, 3, 4, 7, 10, 11, 12, 13	6	-	-	-	14
		1	↓	-	9								2, 3, 4, 7, 10, 11, 12, 13	6	-	-	-	14
		6	↓	-	9								1, 2, 3, 7, 10, 11, 12, 13	4	-	-	-	14
		6	↓	-	9								1, 2, 3, 7, 10, 11, 12, 13	4	-	-	-	14

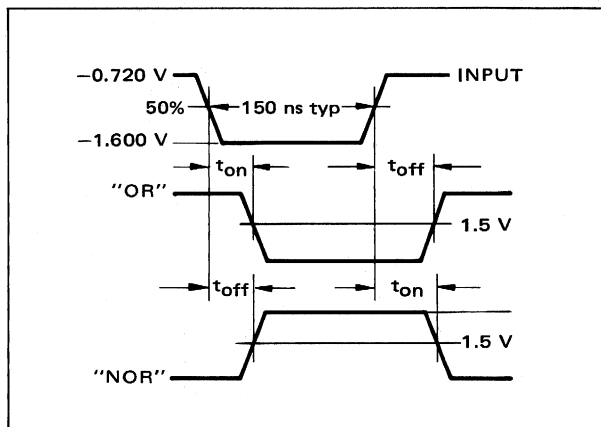


SWITCHING TIME WAVEFORMS

MC1020 MC1220

Four differential amplifiers with emitter follower outputs, intended for use as a comparator or for sensing differential signals over long lines. Each amplifier provides the OR or NOR logic function depending on which input is biased at a given reference voltage.

POSITIVE LOGIC




DC Input Loading Factor = 1
DC Output Loading Factor = 25

TRUTH TABLE


1	2	3	
6	5	4	
8	9	10	
13	12	11	
V_{BB}	H	L	} NOR
V_{BB}	L	H	
H	V_{BB}	H	} OR
L	V_{BB}	L	

CIRCUIT SCHEMATIC

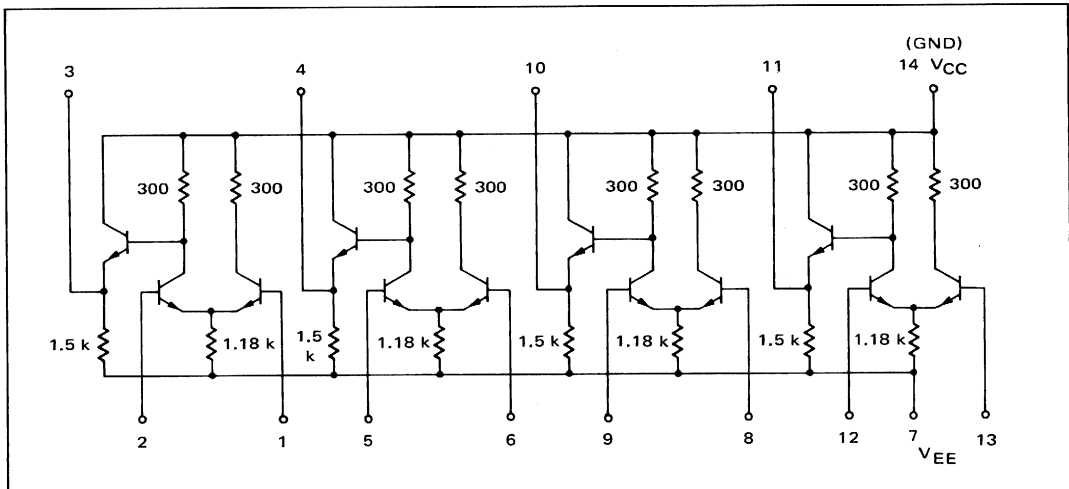

ELECTRICAL CHARACTERISTICS

Test procedures are shown for only one line receiver.
The other line receivers are tested in the same manner.



@Test Temperature
 MC1220 { -55°C
 +25°C
 +125°C
 MC1020 { 0°C
 +25°C
 +75°C

TEST VOLTAGE/CURRENT VALUES							mAdc	V _{CC} (Gnd)
V _{dC} ±1.0%								
V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	V _{BB}	I _L			
-5.2 to -1.405	-1.165 to -0.825	-	-5.2	-1.270	-2.5			
-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-1.175	-2.5			
-5.2 to -1.205	-0.875 to -0.530	-	-5.2	-1.025	-2.5			
-5.2 to -1.350	-1.070 to -0.740	-	-5.2	-1.210	-2.5			
-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-1.175	-2.5			
-5.2 to -1.260	-0.950 to -0.615	-	-5.2	-1.115	-2.5			


TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:							V _{CC} (Gnd)
V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	V _{BB}	I _L		
-	-	-	2, 5, 7, 9, 12	1, 6, 8, 13	-	14	
-	-	1	5, 6, 7, 8, 9, 12, 13	2	-	14	
-	-	2	5, 6, 7, 8, 9, 12, 13	1	-	14	
-	-	-	1, 5, 6, 7, 8, 9, 12, 13	2	-	14	
-	-	-	2, 5, 6, 7, 8, 9, 12, 13	1	-	14	
2	-	-	5, 6, 7, 8, 9, 12, 13	1	3	14	
-	2	-	5, 6, 7, 8, 9, 12, 13	1	-	14	
-	1	-	5, 6, 7, 8, 9, 12, 13	2	-	14	
1	-	-	5, 6, 7, 8, 9, 12, 13	2	-	14	

Characteristic	Symbol	Pin Under Test	MC1220 Test Limits				MC1020 Test Limits				Unit					
			-55°C		+25°C		+125°C		0°C			+25°C		+75°C		
Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Unit		
Power Supply Drain Current	I _E	7	-	-	-	28	-	-	-	-	-	-	-	mAdc		
Input Current	I _{In}	1 2	-	-	-	100	-	-	-	-	-	100	-	μAdc μAdc		
Input Leakage Current	I _R	1 2	-	-	-	0.2	-	1.0	-	-	0.2	-	1.0	μAdc μAdc		
"NOR" Logical "1" Output Voltage†	V _{OH†}	3	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	Vdc	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	Vdc
"NOR" Logical "0" Output Voltage	V _{OL}	3	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	Vdc	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	Vdc
"OR" Logical "1" Output Voltage†	V _{OH†}	3	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	Vdc	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	Vdc
"OR" Logical "0" Output Voltage	V _{OL}	3	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	Vdc	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	Vdc
Switching Times			Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Unit	
Propagation Delay (Fan-Out = 3)	t ₁₊₃₊ t ₁₋₃₋	3	4.0	7.0	4.0	7.0	5.0	8.0	ns	4.0	7.0	4.0	7.0	4.0	7.5	ns
Rise Time (Fan-Out = 3)	t ₃₊		4.0	7.0	4.0	7.0	5.0	8.0		4.0	7.0	4.0	7.0	4.0	7.5	
Fall Time (Fan-Out = 3)	t ₃₋		5.0	8.0	5.0	8.0	6.0	9.0		5.0	8.0	5.0	8.0	5.0	8.5	

† V_{OH} limits apply from no load (0 mA) to full load (-2.5 mA).

MC1020, MC1220 (continued)

SWITCHING TIME TEST CIRCUIT AND WAVEFORMS @ 25°C

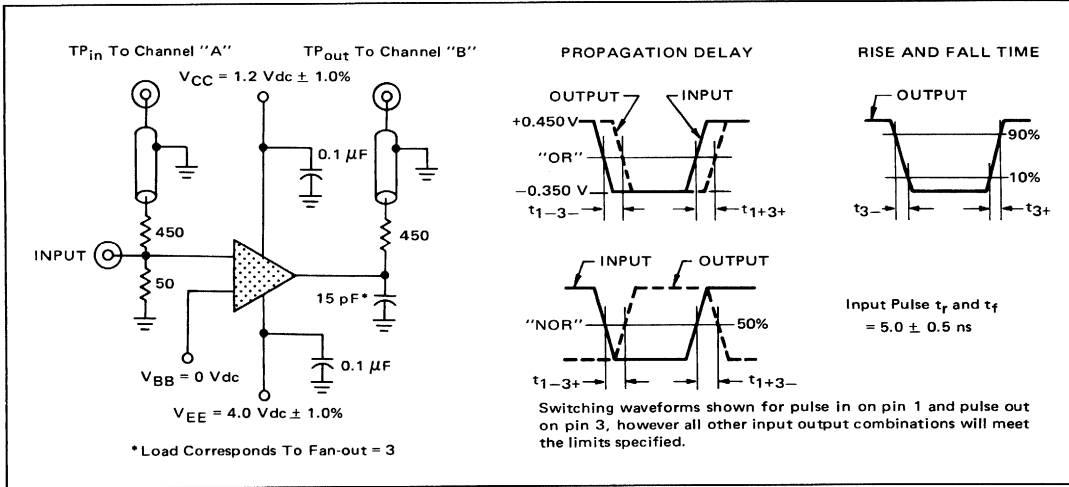

APPLICATIONS INFORMATION

The MC1020/MC1220 quad line receiver is used primarily to receive data from balanced twisted pair lines, as indicated in Figure 1. Any MECL II gate with differential outputs may be used to drive the twisted pair line. The line is terminated in its characteristic impedance (around 100 ohms). A voltage divider is formed between the high-level gate output, the terminating resistor, and the pull-down resistor on the low-level gate output. The equivalent dc circuit is shown in Figure 2. The voltage swing across the terminating resistor (R_T) is typically ± 275 mV. Any input voltage swing in excess of 120 mV is adequate due to the voltage gain of the MC1020/MC1220. The output of the line receiver is the same as a standard MECL II gate. For worst-case pull-down resistors in the driving gate (1.5 k ohms ± 20%) and a V_{OH min}, the differential drop across an R_T of 100 ohms is ± 230 mV.

Very long lines may be used with excellent results. The only restriction on lead length (other than common mode noise) is series line resistance. The nominal voltage drop across R_T is actually shared with the series resistance of the twisted pair line. The resistance of # 22 AWG wire averages about 16 ohms per 1000 feet, while # 24 AWG wire averages about 26 ohms per 1000 feet. For very long lines, an additional voltage drop across R_T is easily obtained by paralleling additional pull-down resistors with those internal to the driver gate. For example, by paralleling a 1.5 k ohm resistor with each output, the voltage drop across R_T is effectively doubled.

Extensive data have shown that a positive transient of 1.0 V or a negative transient of 1.8 V may be introduced on the twisted pair line before noise can propagate through another MECL device tied to the line receiver output. This method of data transmission is useful at frequencies to 50 MHz and results in the highest bandwidth — noise immunity product obtainable with digital logic. A twisted pair is recommended for clock distribution in high-speed systems since distribution skew time may be balanced out by adjusting line lengths. Propagation delay times are approximately 1.0 ns per eight inches of line.

In system design it is often convenient to organize information transfer with a data bus or "party-line" approach. In this application, one of many sources may "talk" to the common data line and multiple receivers may "listen". Figure 3 illustrates such a data bus utilizing MECL II gates as drivers and MC1020's as line receivers. Note that the line is unbalanced, but this will in turn allow all drivers to be ORed together. Bandwidth of data distribution is excellent. The technique may be used to 50 MHz at 25°C and to 40 MHz over the entire military temperature range. Noise immunity

is also good due to the low impedance methods of transmission and the common mode rejection of the line receiver. The following results were obtained during an evaluation of the data bus shown in Figure 3 under worst-case conditions:

- Number of driver gates: 6
- Number of receivers: 8
- Line length: 24 feet
- Differential temperature from transmitter gate to receiver gate: 100°C
- Maximum operating frequency: 40 MHz
- Total terminating resistance: 45 ohms
- Differential power supply voltage from transmitter gate to receiver gate: ± 5.0%

The quad line receiver can also be used in many linear applications. The voltage gain is typically 7.0, with a bandwidth of approximately 70 MHz for each differential amplifier. The device makes an excellent FM limiter with minimal phase shift. By employing feedback, both selective band-pass amplifiers and notch frequency rejection amplifiers may be built. Figure 4 shows ¼ of the quad line receiver used as a parallel tuned-crystal oscillator that exhibits excellent stability.

FIGURE 1 - MECL LINE RECEIVER

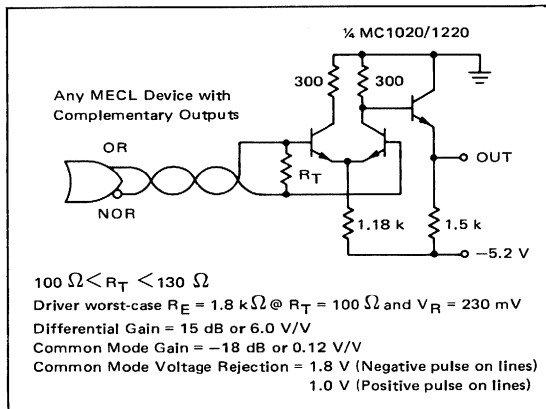


FIGURE 2 - LINE RECEIVER DC EQUIVALENT CIRCUIT

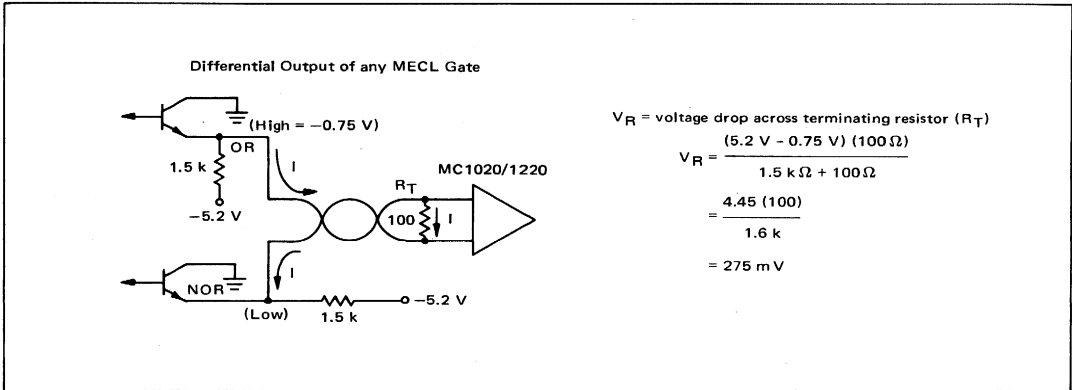


FIGURE 3 - DATA BUS DRIVING WITH MECL II


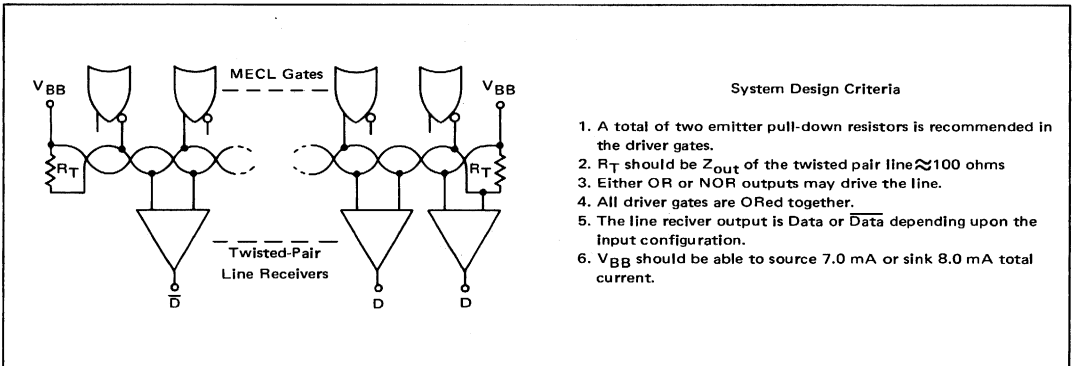


FIGURE 4 - 1/4 MC1020/1220 AS A PARALLEL-TUNED CRYSTAL OSCILLATOR

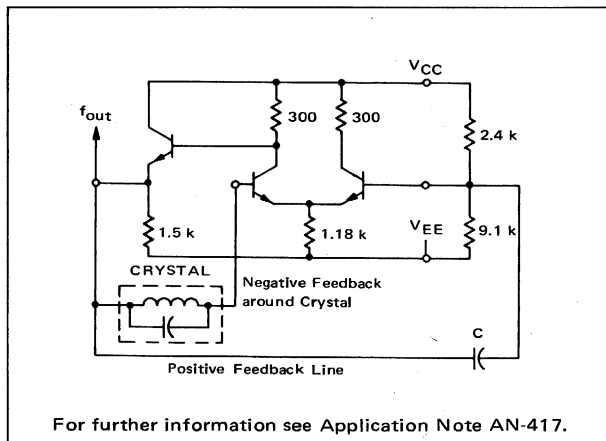


**MC1036
MC1037**

Designed for high-speed systems capable of cycle times as low as 50 ns. The memory is comprised of 16 multiple-emitter flip-flops, eight input emitter followers, and two nonsaturating complementary Sense/Write circuits. The flip-flops form an addressable 4 by 4 memory matrix that exhibits non-destructive read-out for all 16 bits.


In operation a single bit is selected by applying a logical "1" to the coincident "X" and "Y" address lines. This gives a "read" condition where the sense amplifier outputs indicate the storage state of the

selected bit. For example, if the bit store is a logical "1", the Sense "1" amplifier output will be a logical "1" and the Sense "0" amplifier will indicate the complement. With the desired "X" and "Y" lines at a logical "1", writing is accomplished by applying a logical "1" to the Write "1" input or to the Write "0" to obtain a bit store of a "1" or a "0" respectively.

The emitter-coupled sense amplifier outputs permit Wired-OR operation so that word expansion is easily obtained.

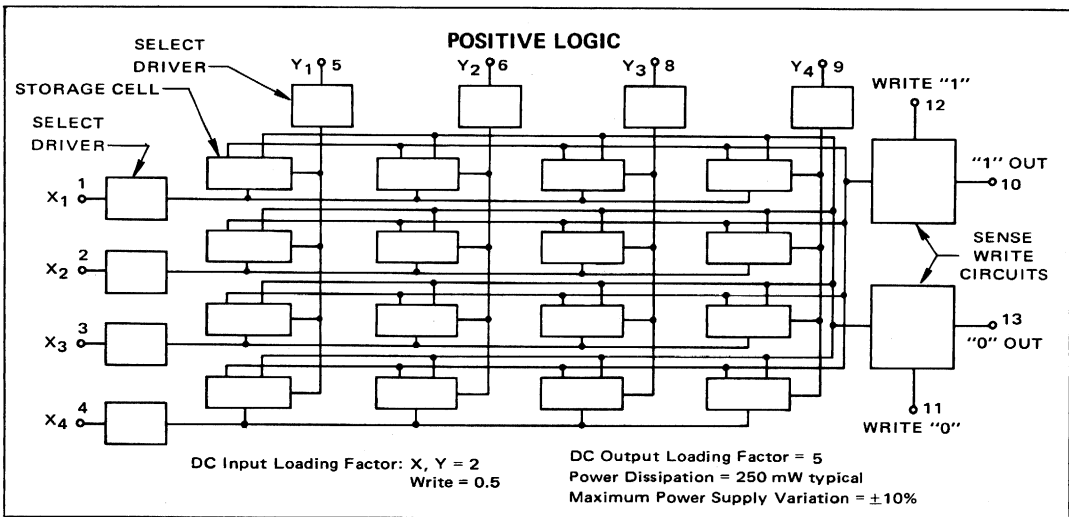

CIRCUIT SCHEMATIC

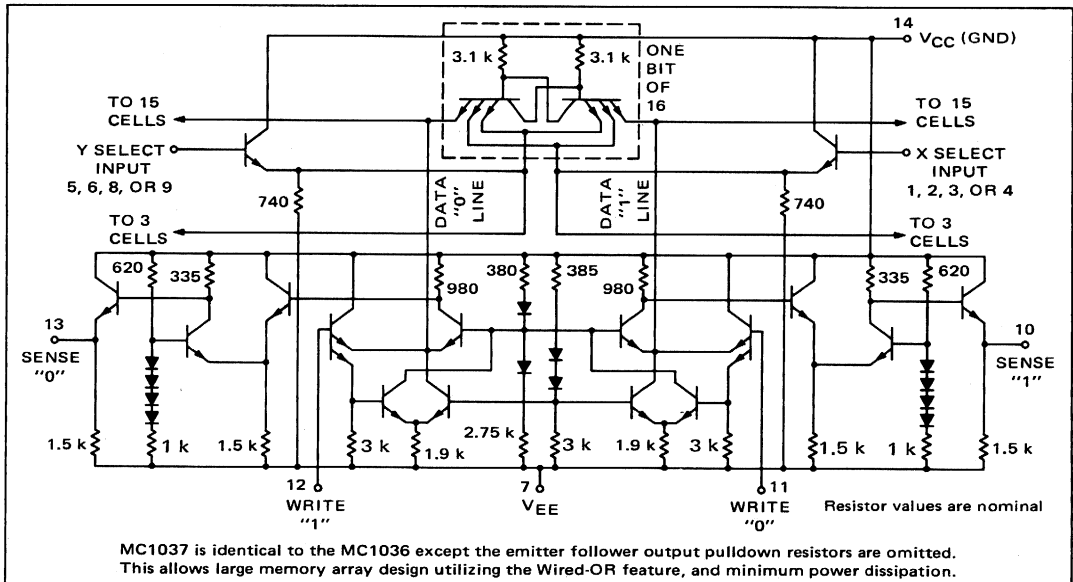

ELECTRICAL CHARACTERISTICS

For MC1036 and MC1037: Test procedures are shown for only the X₁ input, for the X₁, Y_{1,2,3,4} storage cells. To complete testing, sequence through remaining inputs, associated with remaining storage cells.

For MC1037 only: Outputs under test are connected to V_{EE} through 1.5 kΩ resistor.

@Test
Temperature
 { 0°C
 +25°C
 +75°C

Characteristic	Symbol	Pin Under Test	MC1036, MC1037 Test Limits						Unit			
			0°C		+25°C		+75°C					
			Min	Max	Min	Max	Min	Max				
Power Supply Drain Current	I _E	7	-	-	-	66	-	-	mAdc			
Input Current	2 I _{in}	1	-	-	-	200	-	-	μAdc			
	0.5 I _{in}	11	-	-	-	50	-	-	↓			
	0.5 I _{in}	12	-	-	-	50	-	-	↓			
Input Leakage Current	I _R	1	-	-	-	1.0	-	5.0	μAdc			
		11	-	-	-	1.0	-	5.0	↓			
		12	-	-	-	1.0	-	5.0	↓			
Sense "1" Logical "1" Output Voltage †	V _{OH} †	10	-0.935	-0.740	-0.850	-0.700	-0.790	-0.615	Vdc			
		↓	↓	↓	↓	↓	↓	↓	↓			
		↓	↓	↓	↓	↓	↓	↓	↓			
Sense "1" Logical "0" Output Voltage	V _{OL}	10	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	Vdc			
		↓	↓	↓	↓	↓	↓	↓	↓			
		↓	↓	↓	↓	↓	↓	↓	↓			
Sense "0" Logical "1" Output Voltage †	V _{OH} †	13	-0.935	-0.740	-0.850	-0.700	-0.790	-0.615	Vdc			
		↓	↓	↓	↓	↓	↓	↓	↓			
		↓	↓	↓	↓	↓	↓	↓	↓			
Sense "0" Logical "0" Output Voltage	V _{OL}	13	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	Vdc			
		↓	↓	↓	↓	↓	↓	↓	↓			
		↓	↓	↓	↓	↓	↓	↓	↓			
Switching Times †			Typ	Max	Typ	Max	Typ	Max	ns			
			Write Recovery	t ₁₂₋₁₃₋	13	22	30	22		30	25	35
			Output Turn-Off	t ₅₊₁₃₊	13	17	20	17		20	19	22
			Output Turn-On	t ₁₋₁₃₋	13	17	20	17		20	19	22

* V_{IH} applied momentarily to pin 11 or 12 as shown for 25 ns minimum.

† V_{OH} limits apply from no load (0 mA) to full load (-0.5 mA)

† Pins 1 and 5 at V_{IH} + 1.2 Vdc.

TEST VOLTAGE/CURRENT VALUES					V _{CC} (Gnd)
Vdc ± 1.0%				mAdc	
V _{IH}	V _{IH max}	V _{IL}	V _{EE}	I _L	
-0.890	-	-1.525	-5.2	-0.5	
-0.850	-0.700	-1.500	-5.2	-0.5	
-0.790	-	-1.435	-5.2	-0.5	
TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:					
V _{IH}	V _{IH max}	V _{IL}	V _{EE}	I _L	V _{CC} (Gnd)
1,5	-	2,3,4,6,8,9,11,12	7	-	14
-	1	2,3,4,5,6,8,9,11,12	7	-	14
-	11	1,2,3,4,5,6,8,9,12	↓	-	↓
-	12	1,2,3,4,5,6,8,9,11	↓	-	↓
-	-	2,3,4,5,6,8,9,11,12	1,7	-	14
-	-	1,2,3,4,5,6,8,9,12	7,11	-	↓
-	-	1,2,3,4,5,6,8,9,11	7,12	-	↓
1,5,12*	-	2,3,4,6,8,9,11	7	10	14
1,6,12*	-	2,3,4,5,8,9,11	↓	↓	↓
1,8,12*	-	2,3,4,5,6,9,11	↓	↓	↓
1,9,12*	-	2,3,4,5,6,8,11	↓	↓	↓
1,5,11*	-	2,3,4,6,8,9,12	7	-	14
1,6,11*	-	2,3,4,5,8,9,12	↓	-	↓
1,8,11*	-	2,3,4,5,6,9,12	↓	-	↓
1,9,11*	-	2,3,4,5,6,8,12	↓	-	↓
1,5,11*	-	2,3,4,6,8,9,12	7	13	14
1,6,11*	-	2,3,4,5,8,9,12	↓	↓	↓
1,8,11*	-	2,3,4,5,6,9,12	↓	↓	↓
1,9,11*	-	2,3,4,5,6,8,12	↓	↓	↓
1,5,12*	-	2,3,4,6,8,9,11	7	-	14
1,6,12*	-	2,3,4,5,8,9,11	↓	-	↓
1,8,12*	-	2,3,4,5,7,9,11	↓	-	↓
1,9,12*	-	2,3,4,5,6,8,11	↓	-	↓
Pulse In	Pulse Out	V _{IL} + 1.2 Vdc	V _{EE} - 4.0 Vdc		(+1.2 Vdc)
12	13	2,3,4,6,8,9,12	7	-	14
1,5	13	↓	↓	-	↓
1,5	13	↓	↓	-	↓

MC1036, MC1236 (continued)

APPLICATIONS INFORMATION

A memory consisting of 16 words of N bits per word can be realized by connecting the selection lines of N 16-bit memories in parallel as shown in Figure 4. This results in a 4 by 4 selection matrix such that a word is selected by raising one X line and one Y line to the high state. The maximum value of N in this basic configuration is determined by the maximum fan-out of the gate used to drive the array. The recommended maximum N in this configuration is 12 (each input represents 2 dc loads) if MECL II gates are used to drive the X and Y selection lines and the wiring capacitance is a maximum of 3.0 pF per input.

The number of words can be increased by emitter ORing the outputs and/or using output gating. The

emitter ORing technique is shown in Figure 5 for an N-bit by 16M-word memory. Memories 11, 21, . . . , N1 are MC1036's and the remaining units are MC1037's. In this way power dissipation is minimized and no external pulldown resistors are required. The maximum recommended M is 16 and the wiring capacitance should be a maximum of 3.0 pF per output.

A 256-word by 12-bit memory can be constructed without input or output gating (excluding selection gating) if the wiring capacitance can be kept reasonably small. The number of words and the number of bits per word can be increased by proper input and output gating.





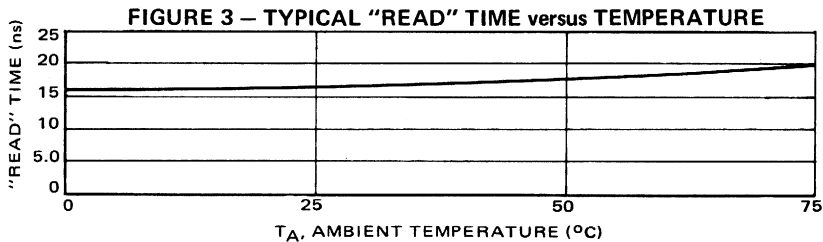


FIGURE 4 – 16-WORD BY N-BIT MEMORY

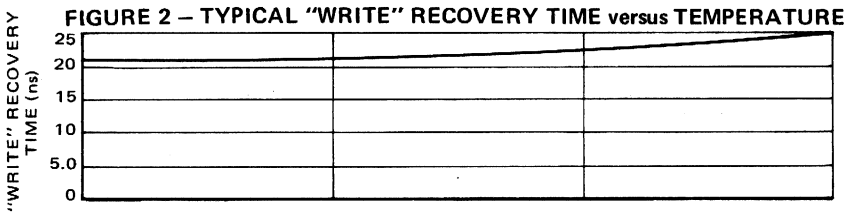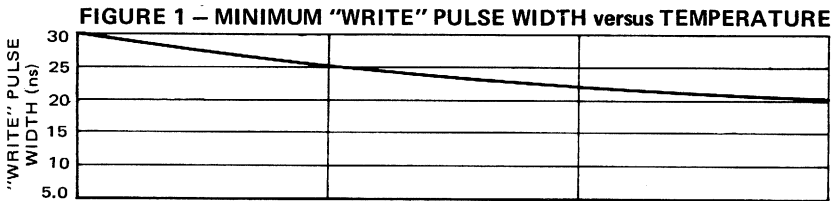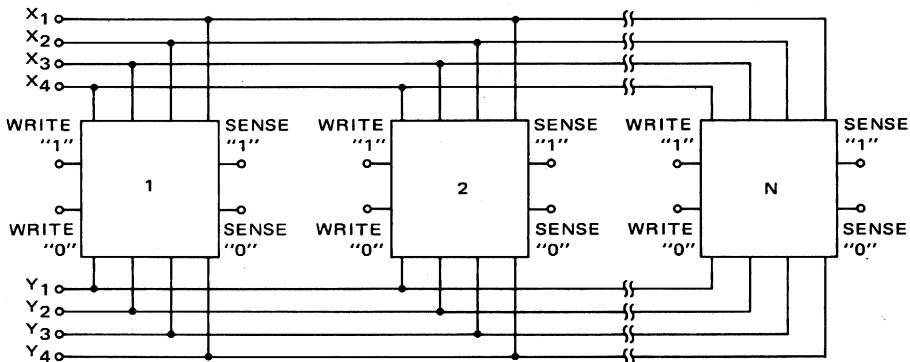


MC1036, MC1236 (continued)

FIGURE 5 – INTERCONNECTION TECHNIQUE FOR N-BIT BY 16M-WORD MEMORY

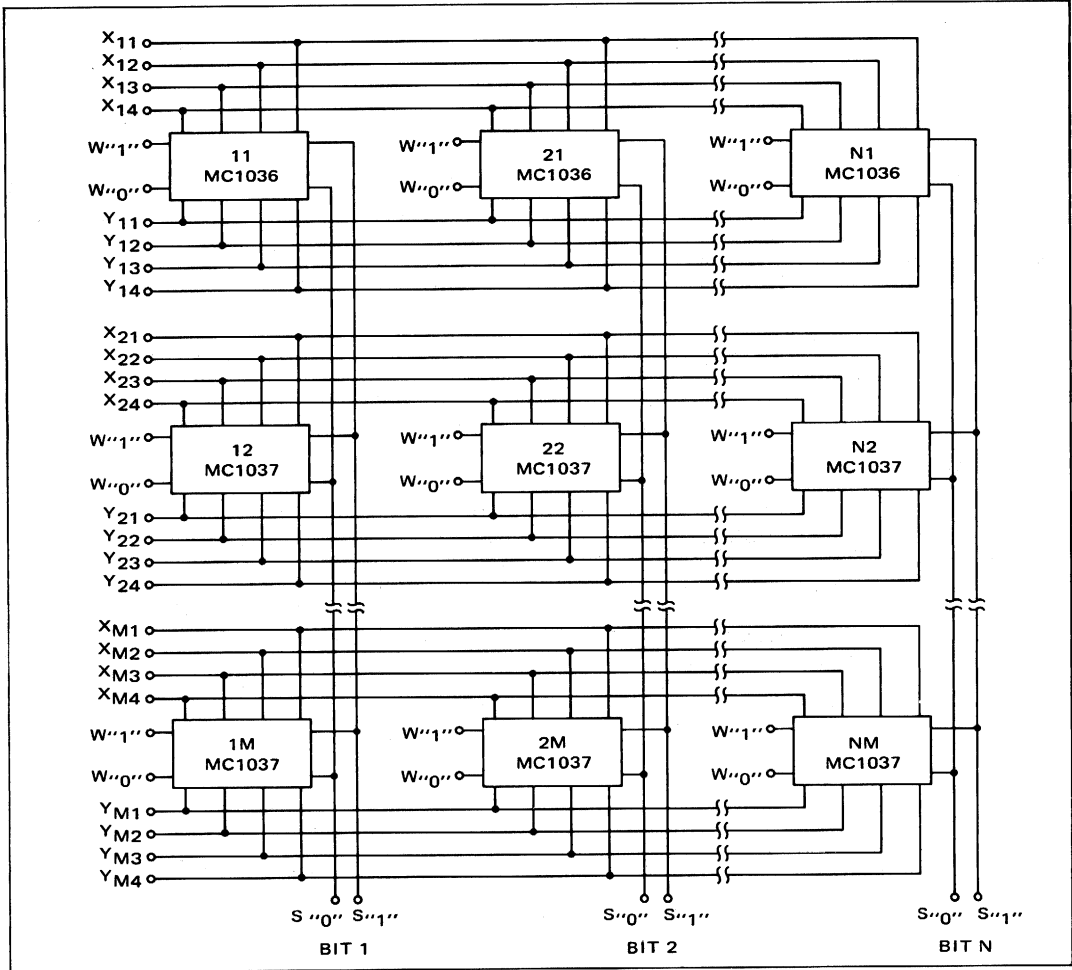


SWITCHING TIME TEST CIRCUIT @ 25°C

(For t₁₋₁₃- and t₅₊₁₃₊)

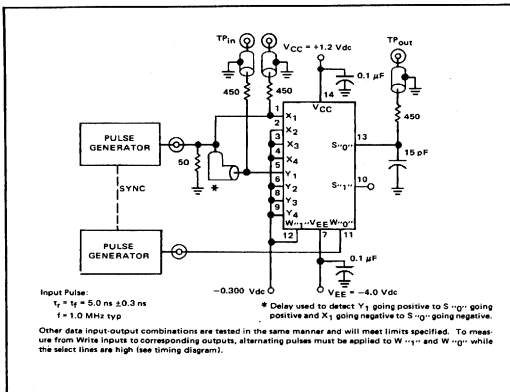

TIMING DIAGRAM @ T_A = 25°C

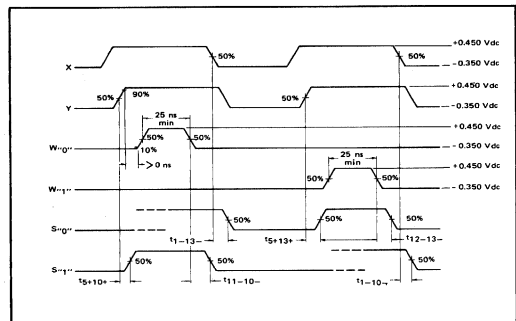

FULL ADDERS


MECL II MC1000/1200 series

MC1019
MC1219

Provides the $\overline{\text{SUM}}$, $\overline{\text{CARRY}}$, and $\overline{\text{CARRY}}$ functions while requiring only AUGEND (A) and ADDEND (B) inputs with CARRY IN and $\overline{\text{CARRY}}$ IN.

POSITIVE LOGIC

TRUTH TABLE

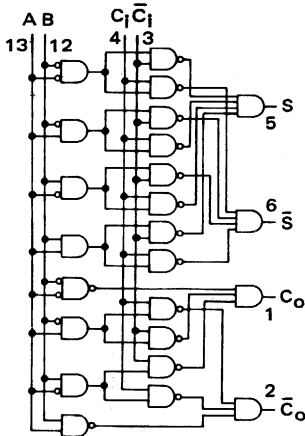

INPUT LOGIC LEVEL				OUTPUT LOGIC LEVEL			
A	B	C _i	\overline{C}_i	S	\overline{S}	C _o	\overline{C}_o
0	0	0	1	0	1	0	1
0	0	1	0	1	0	0	1
0	1	0	1	1	0	0	1
0	1	1	0	0	1	1	0
1	0	0	1	1	0	0	1
1	0	1	0	0	1	1	0
1	1	0	1	0	1	1	0
1	1	1	0	1	0	1	0

$$S = ABC_i + A\overline{B}\overline{C}_i + \overline{A}B\overline{C}_i + \overline{A}\overline{B}C_i$$


$$\overline{S} = \overline{A}\overline{B}\overline{C}_i + \overline{A}\overline{B}C_i + \overline{A}B\overline{C}_i + \overline{A}BC_i$$

$$C_o = ABC_i + A\overline{B}C_i + A\overline{B}\overline{C}_i + \overline{A}BC_i$$

$$\overline{C}_o = \overline{A}\overline{B}\overline{C}_i + \overline{A}\overline{B}C_i + \overline{A}B\overline{C}_i + \overline{A}BC_i$$

DC Input Loading Factor: A, B = 1
C_i, \overline{C}_i = 2
DC Output Loading Factor = 25
Power Dissipation = 110 mW typical

CIRCUIT SCHEMATIC

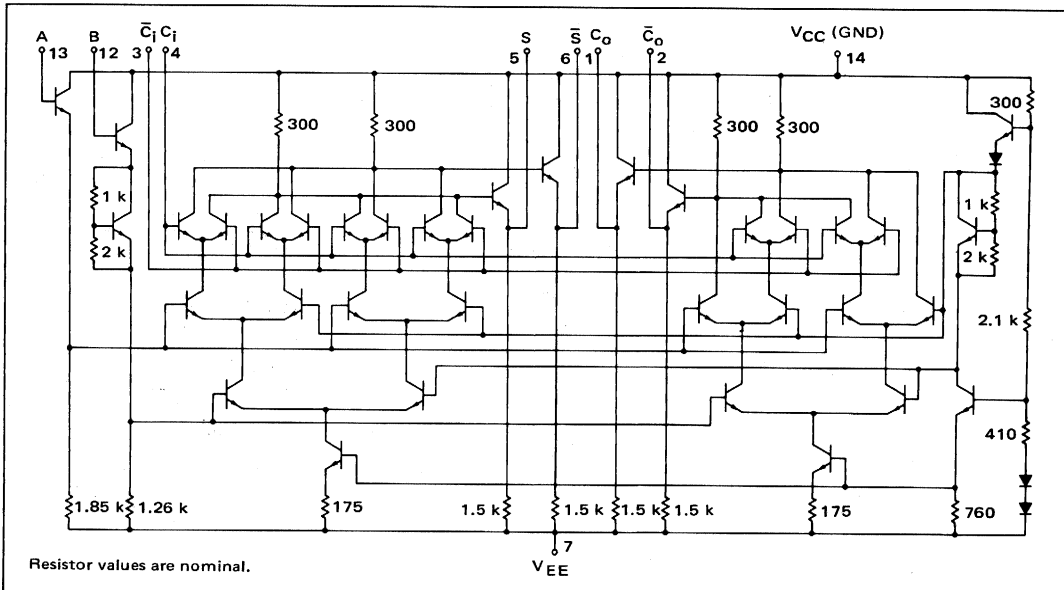


Resistor values are nominal.

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Pin Under Test	MC1219 Test Limits							MC1019 Test Limits								
			-55°C		+25°C		+125°C		Unit	0°C		+25°C		+75°C		Unit		
			Min	Max	Min	Max	Min	Max		Min	Max	Min	Max	Min	Max			
Power Supply Drain Current	I_E	7	-	-	-	30	-	-	mAdc	-	-	-	30	-	-	mAdc		
Input Current	$2 I_{in}$	3	-	-	-	200	-	-	μ Adc	-	-	-	200	-	-	μ Adc		
	$2 I_{in}$	4	-	-	-	200	-	-	μ Adc	-	-	-	200	-	-	μ Adc		
	I_{in}	12	-	-	-	100	-	-	μ Adc	-	-	-	100	-	-	μ Adc		
	I_{in}	13	-	-	-	100	-	-	μ Adc	-	-	-	100	-	-	μ Adc		
Input Leakage Current	I_R	Inputs*	-	-	-	0.2	-	1.0	μ Adc	-	-	-	0.2	-	1.0	μ Adc		
"SUM" Logical "1" Output Voltage †	V_{OH} †	5	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	Vdc	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	Vdc		
"SUM" Logical "0" Output Voltage	V_{OL}	5	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	Vdc	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	Vdc		
"CARRY" Logical "1" Output Voltage †	V_{OH} †	1	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	Vdc	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	Vdc		
"CARRY" Logical "0" Output Voltage	V_{OL}	1	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	Vdc	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	Vdc		
Switching Times (Fan-out = 3)	Addend Input Propagation Delay	t_{12-5+}	5	8.0	13.0	8.0	13.0	8.0	13.0	ns	8.0	13.0	8.0	13.0	8.0	13.0	ns	
		t_{12+5-}	5	7.0	11.5		12.0	10.0	16.0	ns	12.0		12.0	9.0	14.0		ns	
		t_{12+1+}	1	8.0	12.0		12.0	11.0	17.0	ns	12.0		12.0		14.0		ns	
		t_{12-1-}	1	9.0	14.5	9.0	14.5	10.0	15.0	ns	9.0	14.5	9.0	14.5		14.5		ns
	Rise Time	t_{5+}	5	8.0	13.0	9.0	14.0	9.0	14.0	ns	9.0	14.0	9.0	14.0		14.0		ns
		t_{1+}	1	5.0	8.5	5.0	8.5	8.0	12.0	ns	5.0	8.5	5.0	8.5	7.0	10.0		ns
	Fall Time	t_{5-}	5		8.0		8.5	7.0	11.5	ns		8.5		8.5	6.0	9.5		ns
		t_{1-}	1		8.0		8.0	7.0	10.0	ns		8.0		8.0	6.0	9.0		ns
	Augend Input Propagation Delay	t_{13+5-}	5	6.0	8.5	6.0	8.5	7.0	10.5	ns	6.0	8.5	6.0	8.5	6.0	9.5	ns	
		t_{13-5+}		5.0	8.5	5.0	8.5		11.0	ns	5.0	8.5	5.0	8.5		9.0	ns	
		t_{5+}				6.0	9.0		11.0	ns	6.0	9.0	6.0	9.0		9.5	ns	
	Carry Input Propagation Delay	t_{4-5+}	5	3.0	5.0	3.0	5.0	3.0	5.0	ns	3.0	5.0	3.0	5.0	3.0	5.0	ns	
		t_{4+5-}		4.0	7.5	4.0	7.5	6.0	10.0	ns	4.0	7.5	4.0	7.5	5.0	8.5	ns	
		t_{5+}		5.0	8.0	6.0	8.5	7.0	10.5	ns	6.0	8.5	6.0	8.5	6.0	9.5	ns	
	Fall Time	t_{5-}		5.0	8.0	5.0	8.5	7.0	11.0	ns	5.0	8.5	5.0	8.5	6.0	9.5	ns	

* Individually test each input using the pin connections shown. † V_{OH} limits apply from no load (0 mA) to full load (-2.5 mA)

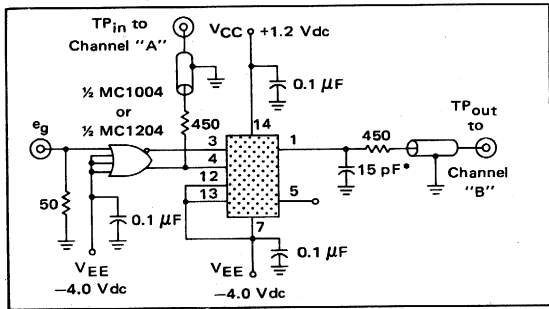


SWITCHING TIME TEST CIRCUIT @ 25°C

* Load corresponds to fan-out = 3.
 Switching test circuit is shown for pulse in on pin 4 and pulse out on pin 1, however all other input-output combinations specified may be tested similarly according to the full subtractor truth table.
 Input pulse t_r and $t_f = 5.0 \pm 0.5$ ns


@Test
Temperature
MC1219 { -55°C
+25°C
+125°C
MC1019 { 0°C
+25°C
+75°C

TEST VOLTAGE/CURRENT VALUES													
V _{dc} ±1.0%							mAdc						
V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L									
-5.2 to -1.405	-1.165 to -0.825	-	-5.2	-2.5									
-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5									
-5.2 to -1.205	-0.875 to -0.530	-	-5.2	-2.5									
-5.2 to -1.350	-1.070 to -0.740	-	-5.2	-2.5									
-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5									
-5.2 to -1.260	-0.950 to -0.615	-	-5.2	-2.5									
TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:													
Characteristic	Symbol	Pin Under Test	V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L	V _{CC} (Gnd)					
Power Supply Drain Current	I _E	7	-	-	-	3, 4, 7, 12, 13	-	14					
Input Current	2 I _{in}	3	4, 13	-	3, 12	7	-	14					
	2 I _{in}	4	3, 12	-	4, 13	↓	-	↓					
	I _{in}	12	3, 13	-	4, 12	↓	-	↓					
	I _{in}	13	3, 12	-	4, 13	↓	-	↓					
Input Leakage Current	I _R	Inputs*	-	-	-	3, 4, 7, 12, 13	-	14					
"SUM" Logical "1" Output Voltage †	V _{OH} †	5	3, 12, 13	4	-	7	5	14					
		↓	4, 13	3, 12	-	↓	↓	↓					
		↓	4, 12	3, 13	-	↓	↓	↓					
		↓	3	4, 12, 13	-	↓	↓	↓					
"SUM" Logical "0" Output Voltage	V _{OL}	5	4, 12, 13	3	-	7	-	14					
		↓	3, 13	4, 12	-	↓	-	↓					
		↓	3, 12	4, 13	-	↓	-	↓					
		↓	4	3, 12, 13	-	↓	-	↓					
"CARRY" Logical "1" Output Voltage †	V _{OH} †	1	3, 13	4, 12	-	7	1	14					
		↓	3, 12	4, 13	-	↓	↓	↓					
		↓	4	3, 12, 13	-	↓	↓	↓					
		↓	3	4, 12, 13	-	↓	↓	↓					
"CARRY" Logical "0" Output Voltage	V _{OL}	1	4, 12, 13	3	-	7	-	14					
		↓	3, 12, 13	4	-	↓	-	↓					
		↓	4, 13	3, 12	-	↓	-	↓					
		↓	4, 12	3, 13	-	↓	-	↓					
Switching Times (Fan-out = 3)	Addend Input Propagation Delay	5	Pulse In		Pulse Out		V _{EE} = -4.0 Vdc	(+1.2V)					
			t ₁₂₋₅₊	12	5	-			7	-	14		
			t ₁₂₊₅₋	↓	5	-			↓	-	↓		
			t ₁₂₊₁₊	↓	1	-			↓	-	↓		
			t ₁₂₋₁₋	↓	1	-			↓	-	↓		
			Rise Time	↓	5	-			↓	-	↓		
			t ₅₊	↓	5	-			↓	-	↓		
			t ₁₊	↓	1	-			↓	-	↓		
			Fall Time	↓	5	-			↓	-	↓		
			t ₅₋	↓	5	-			↓	-	↓		
			t ₁₋	↓	1	-			↓	-	↓		
			Augend Input Propagation Delay	t ₁₃₊₅₋	5	13			5	-	7	-	14
				t ₁₃₋₅₊	↓	↓			↓	-	↓	-	↓
				t ₅₊	↓	↓			↓	-	↓	-	↓
				t ₅₋	↓	↓			↓	-	↓	-	↓
			Carry Input Propagation Delay	t ₄₋₅₊	5	4			5	-	7	-	14
t ₄₊₅₋	↓	↓		↓	-	↓	-	↓					
t ₅₊	↓	↓		↓	-	↓	-	↓					
t ₅₋	↓	↓		↓	-	↓	-	↓					

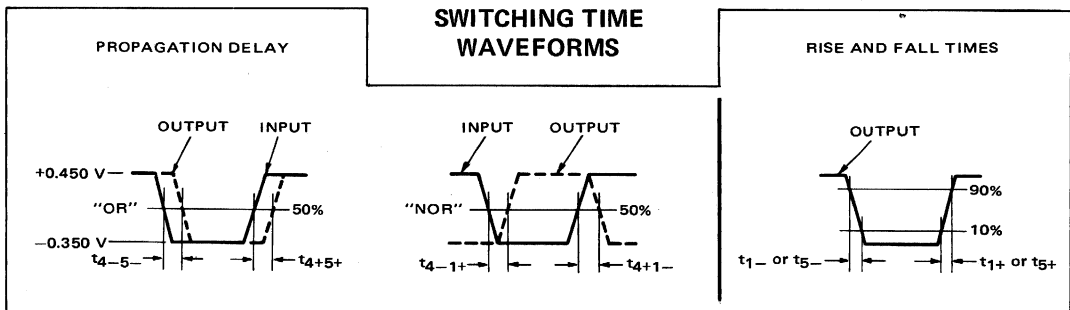

MC1019, MC1219 (continued)

FIGURE 1 - 8 BIT RIPPLE-THROUGH ADDER

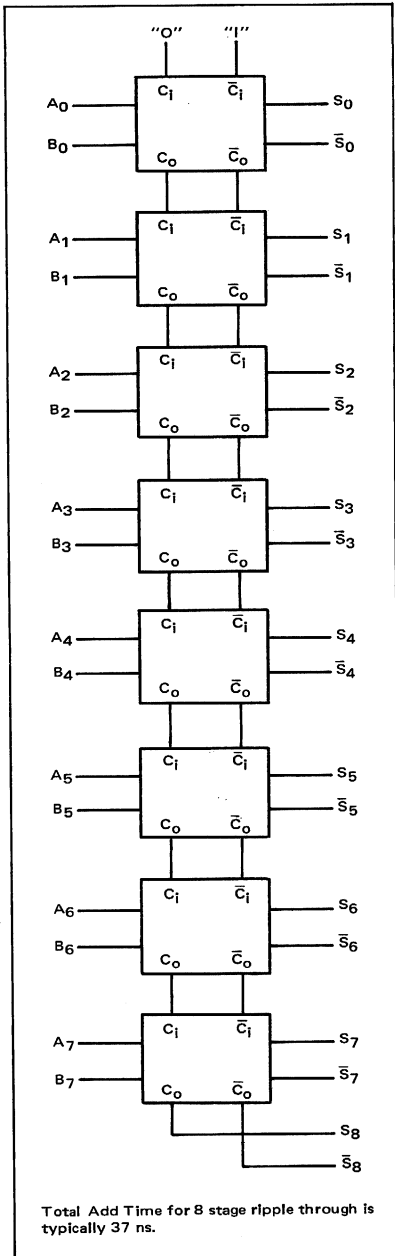


APPLICATIONS INFORMATION

The MC1019/MC1219 full adder exhibits an average propagation delay time of 5.0 ns per stage in a system employing ripple Carry. This device permits practical ripple-through adders as shown in Figure 1, as well as ripple-through multipliers.

The schematic of the full adder illustrates the techniques employed to obtain the necessary logic equations. A compensated current source drives a transistor "tree" with three levels of branching. The B input is translated negative two levels, to switch current between either the left or right branch of the tree. The A input is translated negative one level to switch current at the second level of branching. The Carry inputs switch current through the third level of branching. Depending upon the eight possible combinations of inputs, one specific branch in the Sum generating tree will be carrying current. Thus the proper output state is determined. The Carry generating tree operates in the same manner. This series gating technique results in the best speed-power product obtainable with bipolar technology. Typical propagation delay times from the inputs to outputs are shown in Figure 2.

FIGURE 2 - TYPICAL PROPAGATION DELAY TIMES

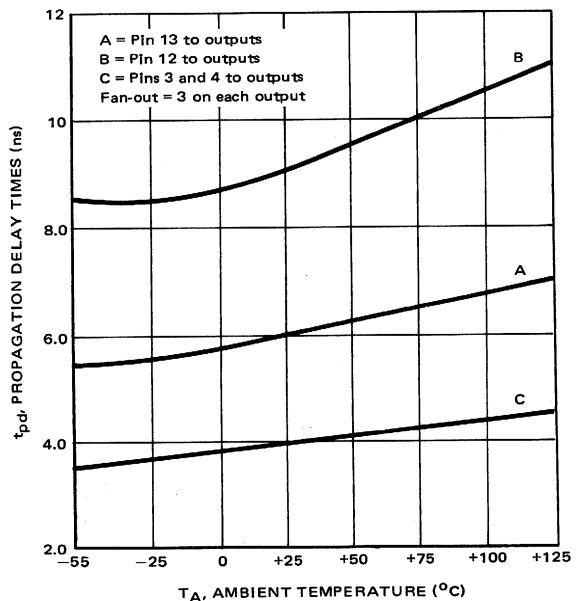


FULL SUBTRACTORS

MECL II MC1000/1200 series

MC1021
MC1221

Provides the DIFFERENCE, DIFFERENCE, BORROW OUT, and BORROW OUT functions while requiring only MINUEND (X) and SUBTRAHEND (Y) inputs with BORROW IN and BORROW IN.

POSITIVE LOGIC

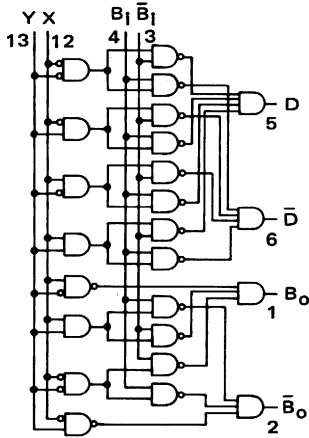

$$D = YXB_i + Y\bar{X}\bar{B}_i + \bar{Y}X\bar{B}_i + \bar{Y}\bar{X}B_i$$

$$\bar{D} = \bar{Y}\bar{X}\bar{B}_i + YX\bar{B}_i + Y\bar{X}B_i + \bar{Y}XB_i$$

$$B_o = \bar{Y}\bar{X}B_i + Y\bar{X}\bar{B}_i + Y\bar{X}B_i + YXB_i$$

$$\bar{B}_o = \bar{Y}\bar{X}\bar{B}_i + \bar{Y}X\bar{B}_i + \bar{Y}XB_i + YX\bar{B}_i$$

DC Input Loading Factor: X, Y = 1 B_i, B_i[̄] = 2


DC Output Loading Factor = 25

Power Dissipation = 110 mW typical

TRUTH TABLE

INPUT LOGIC LEVEL				OUTPUT LOGIC LEVEL			
X	Y	B _i	B _i [̄]	D	D [̄]	B _o	B _o [̄]
0	0	0	1	0	1	0	1
0	0	1	0	1	0	1	0
0	1	0	1	1	0	1	0
0	1	1	0	0	1	1	0
1	0	0	1	1	0	0	1
1	0	1	0	0	1	0	1
1	1	0	1	0	1	0	1
1	1	1	0	1	0	1	0

CIRCUIT SCHEMATIC

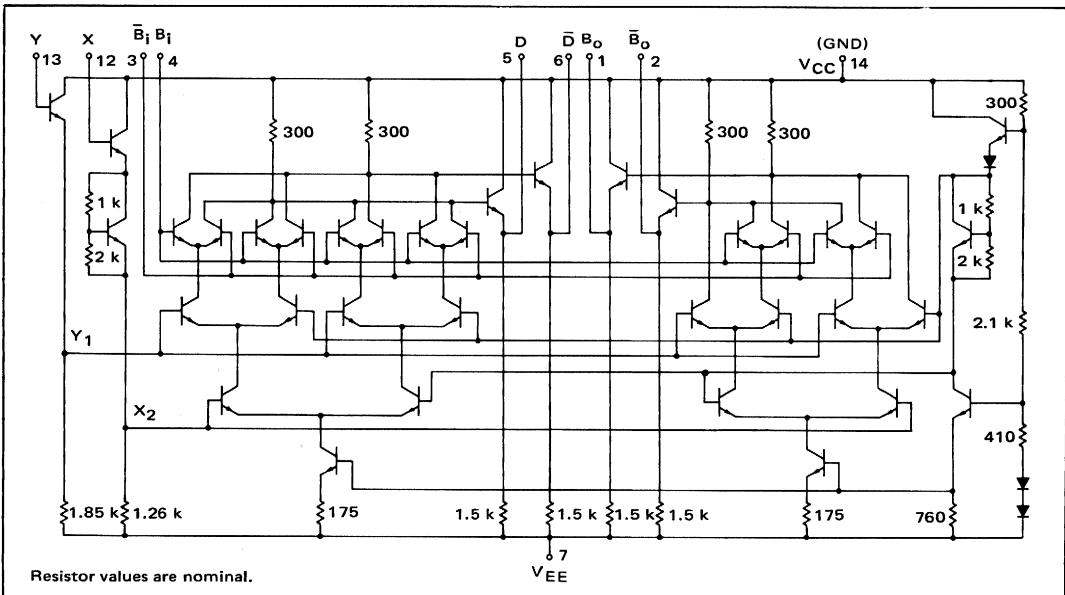

Resistor values are nominal.

MC1021, MC1221 (continued)

ELECTRICAL CHARACTERISTICS


Characteristic	Symbol	Pin Under Test	MC1221 Test Limits								MC1021 Test Limits							
			-55°C		+25°C		+125°C		Unit	0°C		+25°C		+75°C		Unit		
			Min	Max	Min	Max	Min	Max		Min	Max	Min	Max	Min	Max			
Power Supply Drain Current	I_E	7	-	-	-	30	-	-	mA _{dc}	-	-	-	30	-	-	mA _{dc}		
Input Current	$2 I_{in}$	3	-	-	-	200	-	-	μ A _{dc}	-	-	-	200	-	-	μ A _{dc}		
	$2 I_{in}$	4	-	-	-	200	-	-	μ A _{dc}	-	-	-	200	-	-	μ A _{dc}		
	I_{in}	12	-	-	-	100	-	-	μ A _{dc}	-	-	-	100	-	-	μ A _{dc}		
	I_{in}	13	-	-	-	100	-	-	μ A _{dc}	-	-	-	100	-	-	μ A _{dc}		
Input Leakage Current	I_R	Inputs*	-	-	-	0.2	-	1.0	μ A _{dc}	-	-	-	0.2	-	1.0	μ A _{dc}		
"DIFFERENCE" Logical "1" Output Voltage \ddagger	$V_{OH}\ddagger$	5	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	V _{dc}	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	V _{dc}		
"DIFFERENCE" Logical "0" Output Voltage	V_{OL}	5	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	V _{dc}	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	V _{dc}		
"BORROW" Logical "1" Output Voltage \ddagger	$V_{OH}\ddagger$	1	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	V _{dc}	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	V _{dc}		
"BORROW" Logical "0" Output Voltage	V_{OL}	1	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	V _{dc}	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	V _{dc}		
Switching Times	Minuend Input Propagation Delay	5	Typ	Max	Typ	Max	Typ	Max	ns	Typ	Max	Typ	Max	Typ	Max	ns		
			t_{12-5+}	9.0	14	8.0	13	9.0		14.5	8.0	13	8.0	13	8.0		13	
			t_{12+5-}	8.0	13	8.0	13.5	11		17	8.0	13.5	8.0	13.5	9.0		15	
			t_{12-1+}	1	14	7.0	12.5	9.0		14.5	7.0	12.5	7.0	12.5	8.0		13	
	Rise Time	5	t_{12+1-}	13.5	8.0	13.5	11	17	8.0	13.5	8.0	13.5	9.0	15				
			t_{5+}	13	9.0	14	10	14	9.0	14	9.0	14	9.0	14				
	Fall Time	1	t_{1+}	13	7.0	12	9.0	14	7.0	12	7.0	12	8.0	13				
			t_{5-}	5	5.0	8.0	5.0	8.5	7.0	11.5	5.0	8.5	5.0	8.5	6.0	9.5		
				1	5.0	8.0	5.0	8.0	7.0	11.0	5.0	8.0	5.0	8.0	6.0	9.0		
	Subtrahend Input Propagation Delay	5	t_{13+5-}	5.0	8.5	5.0	8.5	7.0	11	ns	5.0	8.5	5.0	8.5	6.0	9.5	ns	
t_{13-5+}			6.0	9.0	5.0	8.5	7.0	11.5	5.0	8.5	5.0	8.5	6.0	9.0				
Rise Time		5	5.0	8.5	6.0	9.0	8.0	11	6.0	9.0	6.0	9.0	7.0	9.5				
Fall Time		5	5.0	8.5	5.0	8.5	7.0	11	5.0	8.5	5.0	8.5	6.0	9.5				
Borrow Input Propagation Delay	5	t_{4-5+}	3.0	5.5	3.0	5.0	4.0	6.0	ns	3.0	5.0	3.0	5.0	3.0	5.0	ns		
		t_{4+5-}	4.0	7.5	4.0	7.5	6.0	10	4.0	7.5	4.0	7.5	5.0	8.5				
	Rise Time	5	5.0	8.0	6.0	8.5	8.0	10.5	6.0	8.5	6.0	8.5	7.0	10				
	Fall Time	5	5.0	8.0	5.0	8.5	7.0	11	5.0	8.5	5.0	8.5	6.0	9.5				

* Individually test each input using the pin connections shown.
 $\ddagger V_{OH}$ limits apply from no load (0 mA) to full load (-2.5 mA).

@Test
 Temperature
 MCI221 { -55°C
 +25°C
 +125°C
 0°C
 MCI021 { +25°C
 +75°C

			TEST VOLTAGE/CURRENT VALUES					V _{CC} (Gnd)				
			V _{dC} ±1.0%				mAdc					
			V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L					
			-5.2 to -1.405	-1.165 to -0.825	-	-5.2	-2.5					
			-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5					
			-5.2 to -1.205	-0.875 to -0.530	-	-5.2	-2.5					
			-5.2 to -1.350	-1.070 to -0.740	-	-5.2	-2.5					
			-5.2 to -1.325	-1.025 to -0.700	-0.700	-5.2	-2.5					
			-5.2 to -1.260	-0.950 to -0.615	-	-5.2	-2.5					
			TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:									
Characteristic	Symbol	Pin Under Test	V _{IL min} to V _{IL max}	V _{IH min} to V _{IH max}	V _{IH max}	V _{EE}	I _L	V _{CC} (Gnd)				
Power Supply Drain Current	I _E	7	-	-	-	3, 4, 7, 12, 13	-	14				
Input Current	2 I _{in}	3	4, 13		3, 12	7	-	14				
	2 I _{in}	4	3, 12		4, 13	↓	-	↓				
	I _{in}	12	3, 13		4, 12	↓	-	↓				
	I _{in}	13	3, 12		4, 13	↓	-	↓				
Input Leakage Current	I _R	Inputs*	-	-	-	3, 4, 7, 12, 13	-	14				
"DIFFERENCE" Logical "1" Output Voltage†	V _{OH} †	5 ↓	3, 12, 13 4, 13 4, 12 3	4 3, 12 3, 13 4, 12, 13	- - - -	7 ↓	5 ↓	14 ↓				
"DIFFERENCE" Logical "0" Output Voltage	V _{OL}	5 ↓	4, 12, 13 3, 13 3, 12 4	3 4, 12 4, 13 3, 12, 13	- - - -	7 ↓	- - - -	14 ↓				
"BORROW" Logical "1" Output Voltage‡	V _{OH} †	1 ↓	3, 12, 13 3, 12 4, 12 3	4 4, 13 3, 13 4, 12, 13	- - - -	7 ↓	1 ↓	14 ↓				
"BORROW" Logical "0" Output Voltage	V _{OL}	1 ↓	4, 12, 13 4, 13 3, 13 4	3 3, 12 4, 12 3, 12, 13	- - - -	7 ↓	- - - -	14 ↓				
Switching Times Minuend Input Propagation Delay			Pulse In		Pulse Out		V _{EE} = -4.0 Vdc	+1.2V				
			t ₁₂₋₅₊	5	12	5			-	7	-	14
			t ₁₂₊₅₋	5	↓	5			-	↓	-	↓
			t ₁₂₋₁₊	1	↓	1			-	↓	-	↓
			t ₁₂₊₁₋	1	↓	1			-	↓	-	↓
			t ₅₊	5	↓	5			-	↓	-	↓
			t ₁₊	1	↓	1			-	↓	-	↓
			t ₅₋	5	↓	5			-	↓	-	↓
			t ₁₋	1	↓	1			-	↓	-	↓
			Subtrahend Input Propagation Delay			t ₁₃₊₅₋			5	13	5	-
t ₁₃₋₅₊	5	↓				5	-	↓	-	↓		
t ₅₋	5	↓				5	-	↓	-	↓		
Borrow Input Propagation Delay			t ₄₋₅₊	5	4	5	-	7	-	14		
			t ₄₊₅₋	5	↓	5	-	↓	-	↓		
			t ₅₋	5	↓	5	-	↓	-	↓		

SWITCHING TIME TEST CIRCUIT
AND WAVEFORMS @ 25°C

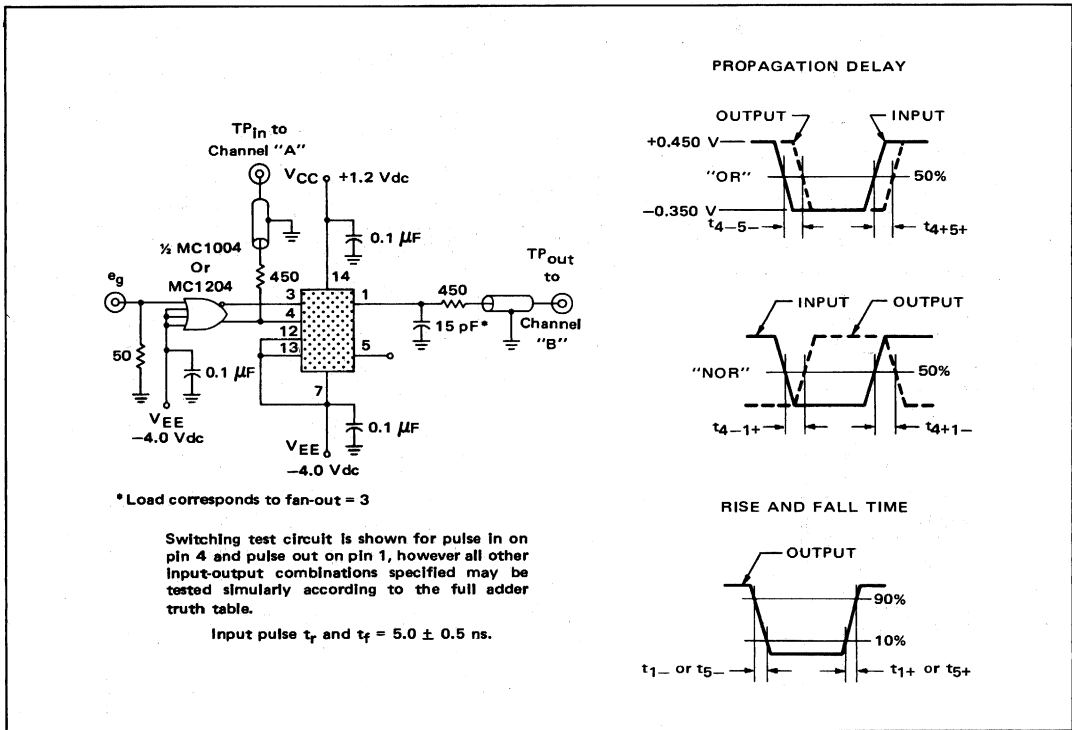


APPLICATIONS
INFORMATION

The MC1021/MC1221 full subtractor is identical to the full adder except for the interconnection metalization. It exhibits an average propagation delay time of 5.0 ns per stage in a system employing ripple Borrow. This device permits building of ripple-through dividers.

The schematic of the full subtractor illustrates the techniques employed to obtain the necessary logic equations. A compensated current source drives a transistor "tree" with three levels of branching. The X input is translated negative two levels, to switch current between either the left or right branch of the tree. The Y input is translated negative one level to switch current at the second level of branching. Depending upon the eight possible combinations of inputs, one specific branch level in the Difference generating tree will be carrying current. Thus the proper output state is determined. The Borrow generating tree operates in the same manner. This series gating technique results in the best speed-power product obtainable with bipolar technology. Typical propagation delay times from the inputs to outputs are shown.

TYPICAL PROPAGATION DELAY TIMES

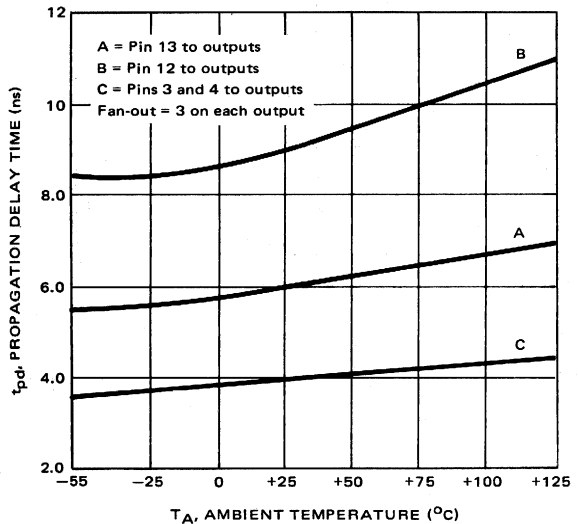


DATA DISTRIBUTOR

MECL II MC1000/1200 series


MC1029 MC1229

A 2 X 3 array of 2-input OR gates, designed primarily for the handling of data in a digital system.

POSITIVE LOGIC

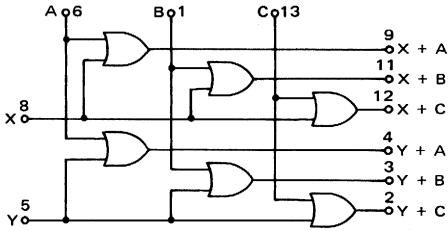

NEGATIVE LOGIC

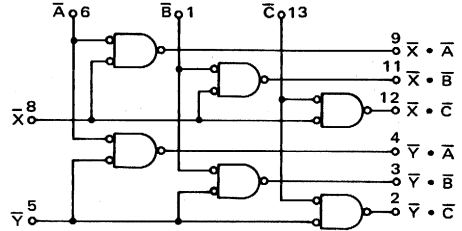

TRUTH TABLE (POSITIVE LOGIC)


X	Y	A	B	C	PIN NUMBER						
					9	11	12	4	3	2	
0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	1	0	0	1	0	0	0	1
0	0	0	1	0	0	1	0	0	0	1	0
0	0	1	0	0	1	0	0	1	0	0	0
0	1	0	0	0	0	0	0	1	1	1	1
1	0	0	0	0	1	1	1	1	0	0	0

DC Input Loading Factors: X, Y = 3; A, B, C = 2


DC Output Loading Factor = 25

Power Dissipation = 160 mW typical

CIRCUIT SCHEMATIC

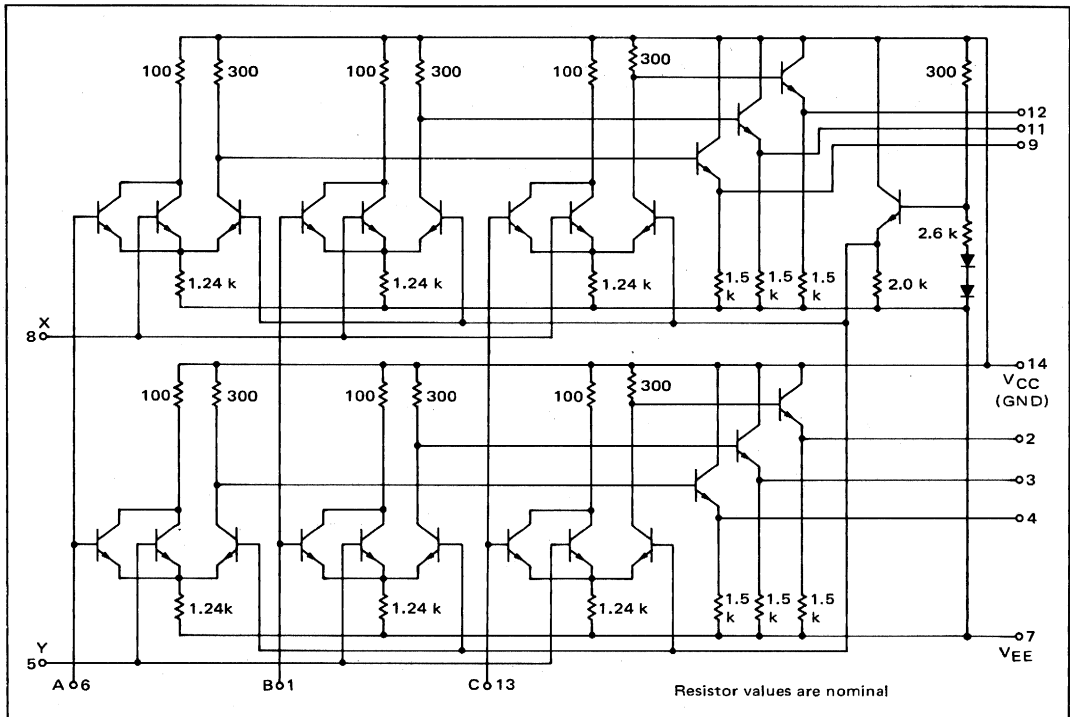

MC1029, MC1229 (continued)

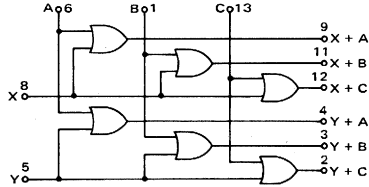


ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Pin Under Test	MC1229 Test Limits						Unit	MC1029 Test Limits							
			-55°C		+25°C		+125°C			0°C		+25°C		+75°C		Unit	
			Min	Max	Min	Max	Min	Max		Min	Max	Min	Max	Min	Max		
Power Supply Drain Current	I_E	7	-	-	-	36	-	-	mAdc	-	-	-	45	-	-	mAdc	
Input Current	I_{in}	5	-	-	-	300	-	-	μ Adc	-	-	-	300	-	-	μ Adc	
		8	-	-	-	300	-	-	μ Adc	-	-	-	300	-	-	μ Adc	
		1	-	-	-	200	-	-	μ Adc	-	-	-	200	-	-	μ Adc	
		6	-	-	-	200	-	-	μ Adc	-	-	-	200	-	-	μ Adc	
		13	-	-	-	200	-	-	μ Adc	-	-	-	200	-	-	μ Adc	
Input Leakage Current	I_R	5, 8*	-	-	-	0.6	-	3.0	μ Adc	-	-	-	0.6	-	3.0	μ Adc	
		1, 6, 13*	-	-	-	0.4	-	2.0	μ Adc	-	-	-	0.4	-	2.0	μ Adc	
Logical "1" Output Voltage	$V_{OH} \ddagger$	3, 11†	-0.990	-0.825	-0.850	-0.700	-0.700	-0.530	Vdc	-0.895	-0.740	-0.850	-0.700	-0.775	-0.615	Vdc	
		4, 9†	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	
		2, 12†	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	
		2, 3, 4†	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	
		9, 11, 12†	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	
Logical "0" Output Voltage	V_{OL}	3, 11†	-1.890	-1.580	-1.800	-1.500	-1.720	-1.380	Vdc	-1.830	-1.525	-1.800	-1.500	-1.760	-1.435	Vdc	
		4, 9†	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	
		2, 12†	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	
		2, 3, 4†	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	
		9, 11, 12†	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	
Switching Times	Propagation Delay	t_{5+4+}	4	Typ	Max	Typ	Max	Typ	Max	ns	Typ	Max	Typ	Max	Typ	Max	ns
				4.0	7.5	4.0	7.5	6.0	9.0		4.0	7.5	4.0	7.5	5.0	8.0	
	Rise Time	t_{4+}	↓	5.0	8.5	5.0	8.5	7.0	9.5	↓	5.0	8.5	5.0	8.5	6.0	9.0	↓
				5.0	8.0	5.0	8.0	7.0	9.0		5.0	8.0	5.0	8.0	6.0	8.5	
	Fall Time	t_{4-}	↓	5.0	8.0	5.0	8.0	7.0	9.0	↓	5.0	8.0	5.0	8.0	6.0	8.5	↓
				5.0	8.5	5.0	8.5	7.0	9.5		5.0	8.5	5.0	8.5	6.0	9.0	
	Propagation Delay	t_{1+3+}	3	4.0	7.5	4.0	7.5	6.0	9.0	↓	4.0	7.5	4.0	7.5	5.0	8.0	↓
				4.0	7.5	4.0	7.5	6.0	9.0		4.0	7.5	4.0	7.5	5.0	8.0	
	Rise Time	t_{3+}	↓	5.0	8.5	5.0	8.5	7.0	9.5	↓	5.0	8.5	5.0	8.5	6.0	9.0	↓
				5.0	8.0	5.0	8.0	7.0	9.0		5.0	8.0	5.0	8.0	6.0	8.5	

* Individually test each input using the pin connections shown. † Individually test each output using the pin connections shown.


SWITCHING TIME TEST CIRCUIT @ 25°C

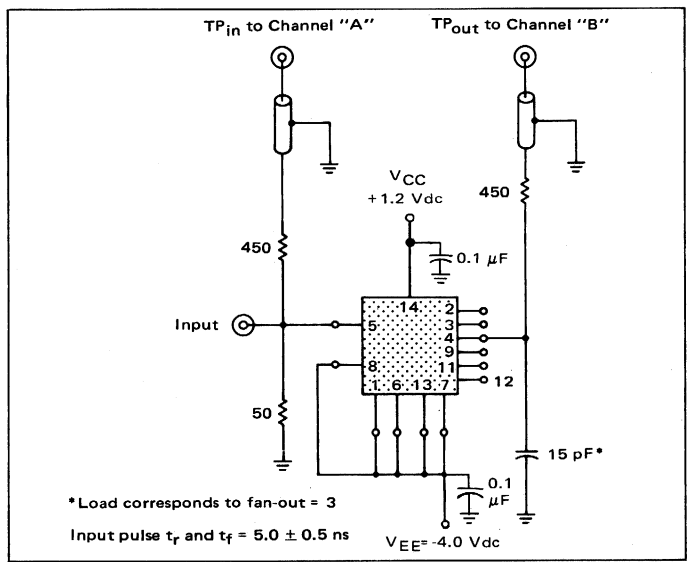

		TEST VOLTAGE/CURRENT VALUES				
		Vdc ±1.0%				mAdc
@Test Temperature		V _{IL}	V _{IH}	V _{IH max}	V _{EE}	I _L
MC1229	-55°C	-1.580	-0.990	-	-5.2	-2.5
	+25°C	-1.500	-0.850	-0.700	-5.2	-2.5
	+125°C	-1.380	-0.700	-	-5.2	-2.5
MC1029	0°C	-1.525	-0.895	-	-5.2	-2.5
	+25°C	-1.500	-0.850	-0.700	-5.2	-2.5
	+75°C	-1.435	-0.775	-	-5.2	-2.5

Characteristic	Symbol	Pin Under Test	TEST VOLTAGE/CURRENT APPLIED TO PINS LISTED BELOW:					V _{CC} (Gnd)
			V _{IL}	V _{IH}	V _{IH max}	V _{EE}	I _L	
Power Supply Drain Current	I _E	7	-	-	-	1, 5, 6, 7, 8, 13	-	14
Input Current	I _{in}	5	-	-	5	1, 6, 7, 8, 13	-	14
		8	-	-	8	1, 5, 6, 7, 13	-	↓
		1	-	-	1	5, 6, 7, 8, 13	-	
		6	-	-	6	1, 5, 7, 8, 13	-	
		13	-	-	13	1, 5, 6, 7, 8	-	
Input Leakage Current	I _R	5, 8*	-	-	-	1, 5, 6, 7, 8, 13	-	14
		1, 6, 13*	-	-	-	1, 5, 6, 7, 8, 13	-	14
Logical "1" Output Voltage	V _{OH} ‡	3, 11†	-	1	-	5, 6, 7, 8, 13	‡	14
		4, 9†	-	6	-	1, 5, 7, 8, 13	↓	↓
		2, 12†	-	13	-	1, 5, 6, 7, 8		
		2, 3, 4†	-	5	-	1, 6, 7, 8, 13		
		9, 11, 12†	-	8	-	1, 5, 6, 7, 13		
Logical "0" Output Voltage	V _{OL}	3, 11†	1	-	-	5, 6, 7, 8, 13	-	14
		4, 9†	6	-	-	1, 5, 7, 8, 13	-	↓
		2, 12†	13	-	-	1, 5, 6, 7, 8	-	
		2, 3, 4†	5	-	-	1, 6, 7, 8, 13	-	
		9, 11, 12†	8	-	-	1, 5, 6, 7, 13	-	
Switching Times	Propagation Delay	t ₅₊₄₊	Pulse In	Pulse Out	-	V _{EE} = -4.0 Vdc	-	(+1.2 V)
			5	4				14
Rise Time	t ₅₋₄₋	↓	↓	↓	↓	↓	↓	↓
Fall Time	t ₄₊	↓	↓	↓	↓	↓	↓	↓
Propagation Delay	t ₄₋	↓	↓	↓	↓	↓	↓	↓
Rise Time	t ₁₊₃₊	3	1	3	-	5, 6, 7, 8, 13	-	↓
			↓	↓	↓	↓	↓	↓
Fall Time	t ₁₋₃₋	↓	↓	↓	↓	↓	↓	↓
	t ₃₊	↓	↓	↓	↓	↓	↓	↓
	t ₃₋	↓	↓	↓	↓	↓	↓	↓

‡ V_{OH} limits apply from no load (0 mA) to full load (-2.5 mA). I_L applied to output under test.

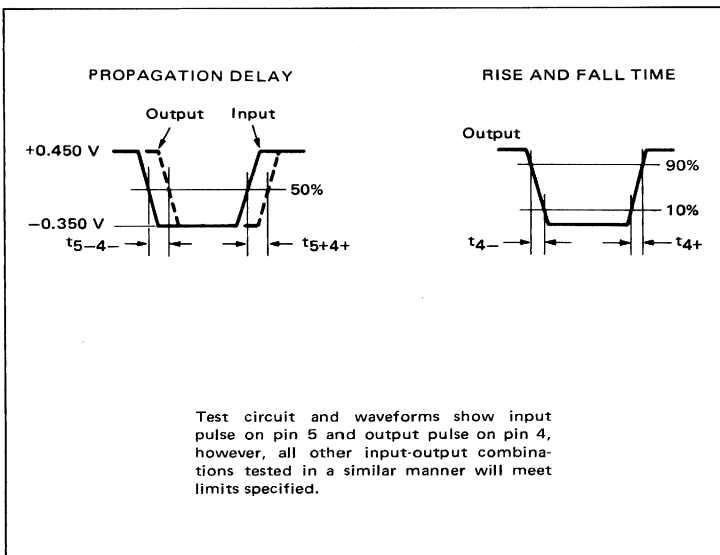


SWITCHING TIME WAVEFORMS

APPLICATIONS INFORMATION

The MC1029/MC1229 data distributor is a 2 X 3 array of 2-input OR gates, as shown in the logic diagram. Inputs X and Y may be used as control inputs to transfer the data on inputs A, B, and C, to the outputs on pins 9, 11, and 12, or to the outputs on pins 4, 3, and 2. Also, if it is desired to distribute data to three destinations, inputs X and Y may be used for data and A, B, and C as control inputs. The data distributor utilizes negative logic; i.e., the positive OR function becomes the negative AND. Data is transferred for a low level on the control inputs.

The data distributor is an example of the manner in which part of a logic system may be partitioned to reduce wiring and package count. Figure 1 illustrates the logic required for the transfer of data from "A" register to "B" register gating or to "C" register gating. Six stages per register are shown in the figure but arrays of any desired length may be built. The typical propagation delay of the data distributor in a system is 5.0 ns, permitting the rapid transfer of data through distribution gating. If data distribution is done on a double-rail basis instead of single-rail as shown, then twice the number of data distributors are required.

FIGURE 1 – REGISTER DATA TRANSFER

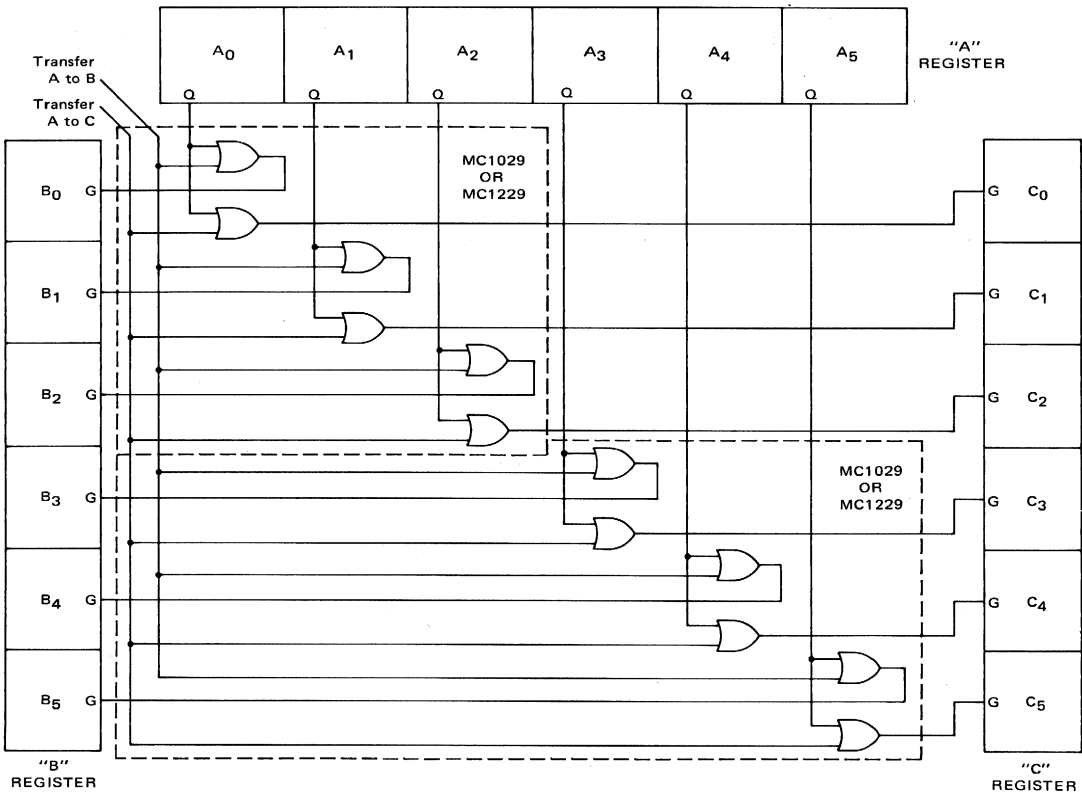


DUAL 4-INPUT
CLOCK DRIVER

MECL II MC1000/1200 series


MC1023


Provides simultaneous OR/NOR or AND/NAND output functions. It contains an internal bias reference insuring that the threshold point is always in the center of the transition region over the temperature range.

This circuit is designed to operate in high-speed digital computer applications as a clock driver or as a high-speed gate.

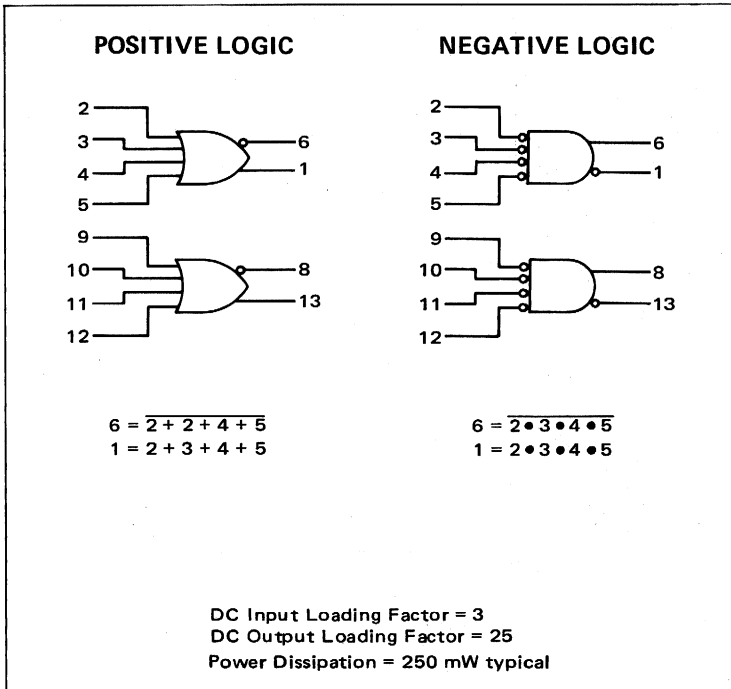

CIRCUIT SCHEMATIC

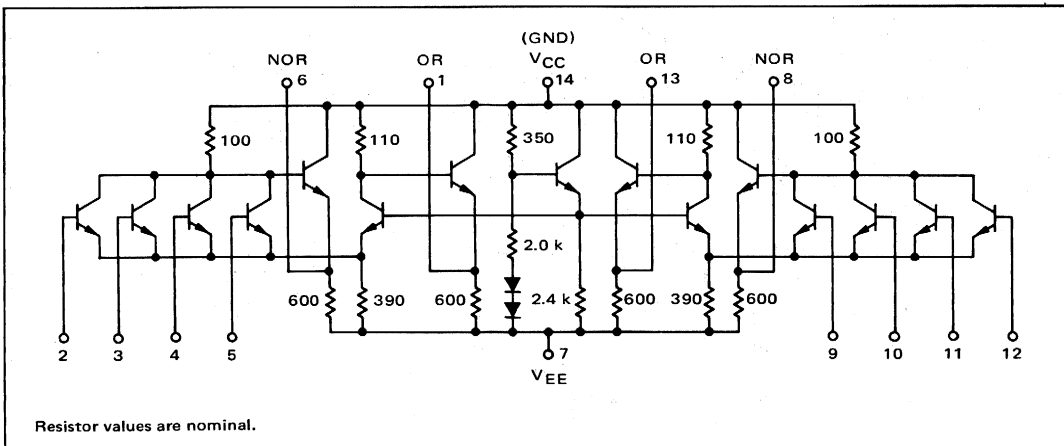

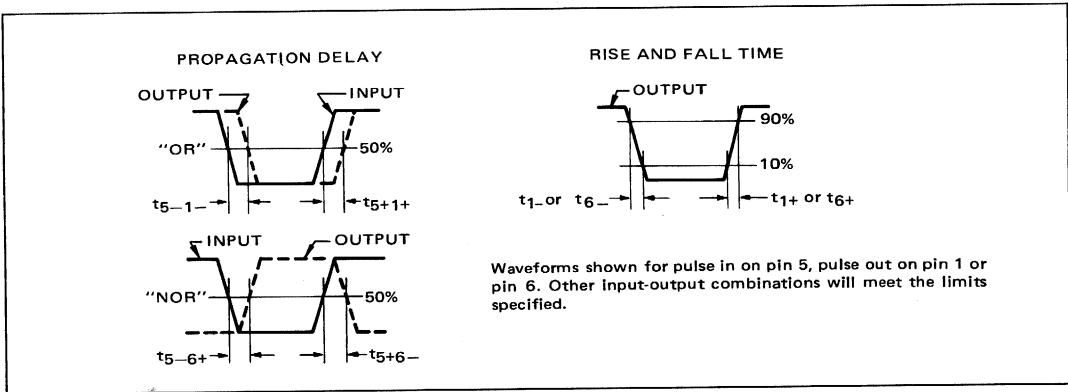

APPLICATIONS INFORMATION

The MC1023 is a dual high-speed gate designed for use as a clock driver which allows the MECL II flip-flops to operate at their full speed capability. More advanced processing techniques than those used on standard MECL II are employed for the clock driver, resulting in an improved speed-power product. The dual gate exhibits typical propagation delay times of 2.0 ns. Due to this short propagation delay, the gate makes an ideal clock driver for long shift registers where the clock pulse may be distributed with minimal skew time over the entire register length.

Since rise and fall times may be as fast as 1.0 ns under light loading, the following precautions must be taken during layout. The MC1023 will not drive back-plane point-to-point wiring satisfactorily. Due to the fast logic transitions a maximum length of three inches for point-to-point wiring is recommended. Lower impedance printed wires allow longer line lengths. Due to the low output impedance (5.0 ohms) of the MC1023, additional terminating resistance to -5.2 V may be employed. This reduces fall time for capacitive loads and propagation delay to negative-going outputs. Figure 1 shows typical curves for output voltage versus load current. Figures 2 through 7 show curves for rise, fall, and propagation delay times versus loading for a typical gate. Capacitance of 5.0 pF per fan-out was used during the tests. This is conservative, since stray and input capacitance is closer to 4.0 pF per fan-out when driving flip-flops in high-speed designs.

The MC1023 is also very useful for providing the additional levels of gating required for some counting configurations such as divide-by-seven and divide-by-thirteen counters. The maximum frequency of operation of such a counter depends upon the flip-flop and gating delay which determines the minimum "up time" of the clock waveforms. Due to its short propagation delay the MC1023 when used with an MC1027 allows a divide-by-seven counter to operate up to 100 MHz.

Due to the 5.0-ohm output impedance the clock driver will also drive low impedance lines. When driving a 50-ohm termination to -2.0 V the output "1" level will be reduced by a maximum of 0.100 V. The minimum "1" level is approximately -0.950 V with a load current of 21 mA, reducing voltage noise immunity by 0.100 V. Noise power or energy noise immunity is still good due to the very low gate output impedance and low line impedance.

Two additional applications of the MC1023 are shown in Figures 8 and 9.

FIGURE 1 - TYPICAL OUTPUT CHARACTERISTICS

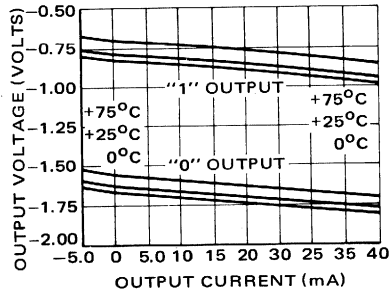


FIGURE 2 - RISE TIME


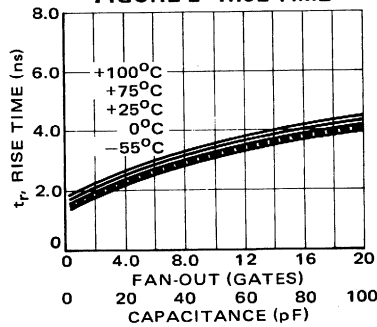


FIGURE 3 - FALL TIME

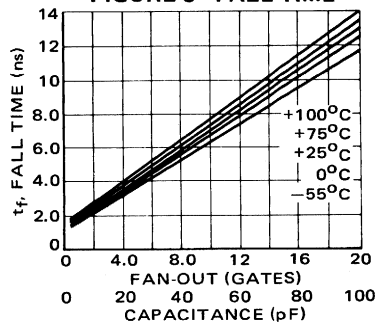

APPLICATIONS INFORMATION (continued)

FIGURE 4 - t_{pd+-}

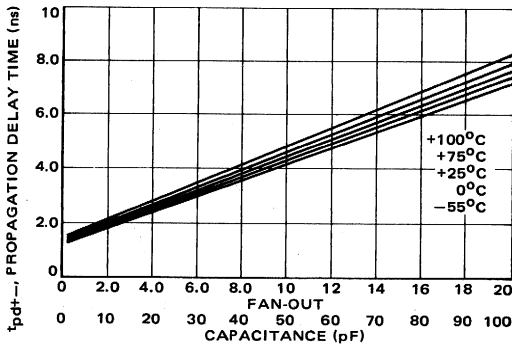


FIGURE 5 - t_{pd-+}

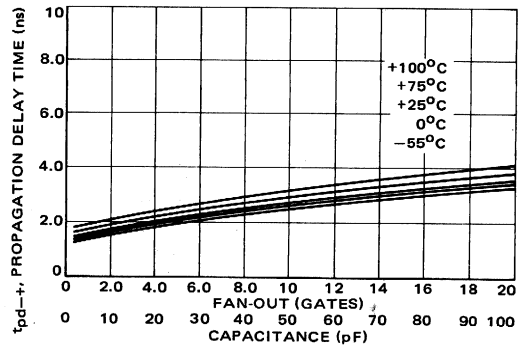


FIGURE 6 - t_{pd++}

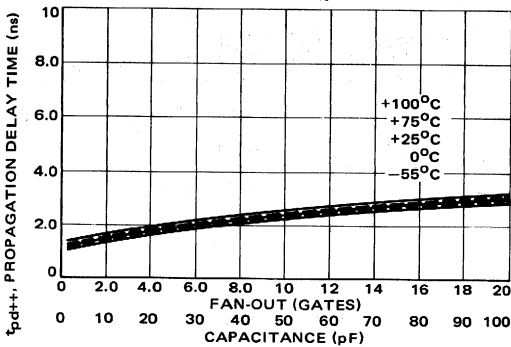


FIGURE 7 - t_{pd--}

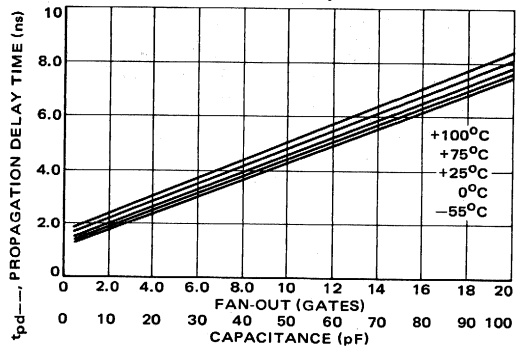


FIGURE 8 - MC1023 AS A ONE SHOT AND CLOCK SHAPER

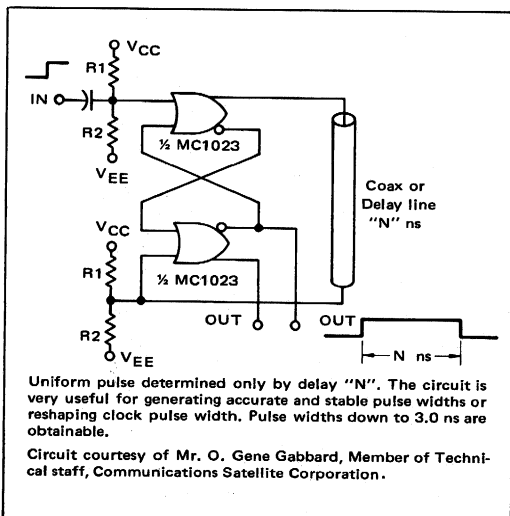


FIGURE 9 - MC1023 AS A CRYSTAL OSCILLATOR

