



# HP 7974/7978 Magnetic Tape Drive Exerciser Manual

---

Data Systems Division  
11000 Wolfe Road  
Cupertino, CA 95014-9974

Manual Part No. 5958-9137  
E0186

Printed in U.S.A. January, 1986

## **NOTICE**

The information contained in this document is subject to change without notice.

HEWLETT-PACKARD MAKES NO WARRANTY OF ANY KIND WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Hewlett-Packard shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

Hewlett-Packard assumes no responsibility for the use or reliability of its software on equipment that is not furnished by Hewlett-Packard.

This document contains proprietary information which is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced or translated to another language without the prior written consent of Hewlett-Packard Company.

# Printing History

The Printing History below identifies the edition of this manual and any updates that are included. Periodically, update packages are distributed which contain replacement pages to be merged into the manual, including an updated copy of this printing history page. Also, the update may contain write-in instructions.

Each reprinting of this manual will incorporate all past updates; however, no new information will be added. Thus, the reprinted copy will be identical in content to prior printings of the same edition with its user-inserted update information. New editions of this manual will contain new information, as well as all updates.

To determine what manual edition and update is compatible with your current software revision code, refer to the appropriate Software Numbering Catalog, Software Product Catalog, or Diagnostic Configurator Manual.

First Edition ..... January 1986 .....



# Table of Contents

---

## Chapter 1 Installation

HP-IB Mag Tape Configuration .....	1-1
Exerciser Software .....	1-2
Disc-Based Software .....	1-3
Loading the Disc-Based Exerciser .....	1-3
Memory-Based Software (A-Series only) .....	1-4
Installing the Memory-Based Software .....	1-4
Processor and Interface Configuration .....	1-4
Boot Procedures .....	1-5
Booting from 3.5-Inch or 5.25-Inch Disc .....	1-6
Booting from 8-Inch Flexible Disc .....	1-7
Booting from Mini-Cartridge Tape .....	1-8
Booting from CS/80 Cartridge Tape .....	1-9

## Chapter 2 Operation

Main Menu .....	2-1
Options .....	2-2
Test All (Option 1) .....	2-2
Clear (Option 2) .....	2-3
Identify (Option 3) .....	2-3
Loopback (Option 4) .....	2-3
Power-On Self-Test (Option 5) .....	2-4
Status (Option 6) .....	2-4
Internal Device Error Logs (Option 7) .....	2-5
Read Internal Bus Error Log (Option 14) .....	2-5
Read Tape Log (Option 15) .....	2-6
Decode Self-Test Status (Option 16) .....	2-6
Selectable Self-Tests (Option 20) .....	2-6
Tape Movement Commands (Option 30) .....	2-8
Tape Write Commands (Option 40) .....	2-8
Tape Read Commands (Option 45) .....	2-9
Service Utilities (Option 50) .....	2-9

**Appendix A  
Status Registers**

Status Register 1 .....	A-1
Status Register 2 .....	A-1
Status Register 3 .....	A-2
Status Register 4 .....	A-2
Status Register 5 .....	A-2
Status Register 6 .....	A-2

**Appendix B  
Option 20 Self-Test Calls**

HP 7974 Self-Tests .....	B-1
HP 7978 Self-Tests .....	B-1

**Appendix C  
Self-Tests**

HP 7974 Self-Tests .....	C-1
HP 7978 Self-Tests .....	C-2

**Tables**

Table 1-1. Exerciser Software for VCP Terminal on ASIC and MUX .....	1-4
--	-----

# Installation

---

The HP 7974/7978 Magnetic Tape Drive Exerciser is a software package for testing and diagnosing problems with HP 7974 and HP 7978 (A-Series only) tape drives on HP 1000 computer systems. The Exerciser uses the tape drive internal diagnostics, which are designed to isolate errors to specific Field Replaceable Units.

For information on the HP-IB interface bus, refer to the HP-IB Users Manual, 59310-90064, and the installation and service manual that applies to your particular computer system.

## HP-IB Mag Tape Configuration

To configure the HP-IB Magnetic Tape interface, proceed as follows:

1. Turn off power to the computer and the magnetic tape drive.
2. For E/F-Series computers, proceed as follows using a 12821A HP-IB interface card and cable:
  - a. Enable the System Controller function by setting U13-S8 (i.e., DIP switch position 8 at location U13) to open (= 1 = up). Set U13-S1 through S7 to closed (= 0 = down).
  - b. Allow DCPC pacing by placing jumper W1 (above location U94) in the "A" position.
3. For A-Series computers, use the 12009A HP-IB interface card and cable.

Locate the select code switch (U1) on the HP-IB card. U1 is the switch pack facing the rear of the card cage. Set the select code to octal 27 as follows:

12009A Interface switch U1	#	1	2	3	4	5	6	7	8
1 = open = up, 0 = closed = down		1	0	0	1	0	1	1	1

Switch U16 (facing the side of the card cage) does not affect Exerciser operation, and can be set to any configuration.

4. Insert the HP-IB card in the proper computer I/O slot, and connect the HP-IB cable.
5. Turn on the power to the computer and magnetic tape drive.
6. Set the HP-IB address on the tape drive to 3, by doing the following:
  - a. Press the address key.
  - b. Press the unit key until you see a 3.

## Exerciser Software

The Exerciser software is included as part of the HP 24398B Peripherals Diagnostics Package for A-Series Computer Systems. These diagnostics are bootable memory-based systems.

The relocatable modules that comprise the Exerciser are also present on the RTE-A Primary System and on the 91711B Diagnostic and Verification Package for use on E/F Series computer systems. You can use these modules to run the Exerciser without halting the operating system.

---

### NOTE

The exerciser should not be used to test the HP 7978 tape drive on an E/F-Series computer system. The HP 7978 is not currently supported on E/F-Series computers. When any reference is made to the HP 7978 tape drive, it is assumed the diagnostic is being executed on an A-Series computer.

---



## Disc-Based Software

The following are the modules supplied with the RTE-A Primary System, and the 91711B Diagnostic and Verification Package.

Part Number	Name	Description	Part of
A-SERIES COMPUTERS			
92077-16649 92077-16663	%MTEXR %MEXPL	Exerciser Main Self-Test Listing	RTE-A Primary RTE-A Primary
M/E/F-SERIES COMPUTERS			
91711-16383 91711-16384	%MTEXR %MEXPL	Exerciser Main Self-Test Listing	91711B Diagnostics Package 91711B Diagnostics Package

## Loading the Disc-Based Exerciser

The disc-based Exerciser may be loaded online on both A-Series and E/F-Series computers. It is supplied in the form of two separate relocatables, %MTEXR and %MEXPL. MTEXR is the main module; it schedules MEXPL to print an explanation of available self-tests. Thus, you must RP MEXPL before you can run MTEXR, using the following sequence:

```
CI> LINK %MEXPL
CI> LINK %MTEXR
CI> RP MEXPL
CI> RU MTEXR
```

Note that if executable versions of MEXPL and MTEXR already exist, the LINK operations are not required. If MEXPL is not RPd, the Self-Test Listing (Option 43, Chapter 2) will not operate. The remaining functions of the Exerciser, however, will not be affected.

After loading the disc-based exerciser, proceed to the Operation chapter of this manual.

## Memory-Based Software (A-Series only)

Memory-based Exerciser software is supplied on the media listed in Table 1-1. For all media except mini-cartridge tape the software is available in two versions, one version for VCP terminals using an ASIC interface, the other for VCP terminals using the MUX. Mini-cartridge tape is suitable only for booting from VCP terminals using the ASIC interface.

Table 1-1. Exerciser Software for VCP Terminal on ASIC and MUX

Medium	Part Numbers	
	ASIC	MUX
3.5-inch Microfloppy	24398-13417	24398-13425
5.25-inch Minifloppy	24398-13411	24398-13422
8-inch Flexible Disc	24398-13407	24398-13419
Mini-Cartridge Tape (CTU) No. 1	24398-13339	N/A
Mini-Cartridge Tape (CTU) No. 2	24398-13340	N/A
CS/80 Cartridge Tape (CTD)	24398-13318	24398-13318
With Primary System on CTD	02196-13301	02196-13301

### Installing the Memory-Based Software

Installing the memory-based Exerciser software requires configuring the processor and interface cards, then entering a boot command at the VCP terminal.

### Processor and Interface Configuration

For compatibility with any of the software listed in Table 1-1, set the switches on the A-Series processor card, the tape drive under test, and the HP-IB interface card as directed in steps 2, 3 and 4 below. Also, do either step 5 or step 6. Step 5 applies for software on disc or CS/80 cartridge tape, while step 6 applies for software on mini-cartridge. Use the ASIC setting in step 6 if your terminal is connected with an ASIC card. Do step 7 if the VCP terminal in your system is on the MUX.

1. Turn the power switches on the computer and the terminal OFF.
2. Set the processor card switch to enter the VCP routine on power-up:

Processor switch Bootsel (U1)	#	1	2	3	4	5	6	7	8
1 = open = up, 0 = closed = down		1	0	0	0	0	0	0	1

3. If the memory-based Exerciser software is on disc or cartridge tape, connect the disc drive or CTD from which you will boot to the HP-IB card. Set the HP-IB address on the boot device to 2.

Note that the boot device can be on a select code other than 27 and the HP-IB address can be other than 2, provided you use the actual numbers in the bootstring. The tape drive under test, however, must be at select code 27 for compatibility with the memory-based Exerciser system. The examples in the boot procedures that follow use address 2 and select code 27 for the boot device.

4. If the memory-based Exerciser software is on mini-cartridge tape, boot from a Cartridge Tape Unit (CTU) in a 264x terminal with an ASIC interface. Locate switch U1 on the 12005A/B interface card to which the terminal with the CTU is connected. U1 is the switch facing the rear of the card cage. Set U1 as follows:

12005A/B Interface switch U1	#	1	2	3	4	5	6	7	8
1 = open = up, 0 = closed = down		x	0	0	1	0	0	0	0
x = 0 if VCP, x = 1 if not VCP									

Set U21 for normal operation of the terminal (U21 faces the side of the card cage).

5. If the Exerciser software is for a VCP terminal on the MUX, set the address switch on the 12040B MUX card as follows:

12040B MUX address switch	#	1	2	3	4	5	6	7	8
1 = open = up, 0 = closed = down		0	0	0	1	0	0	1	1

## Boot Procedures

Use one of the following four procedures to boot the Exerciser system, depending on the memory-based Exerciser software medium. The first procedure given is for floppy disc, either 3.5-inch or 5.25-inch.

## Booting from 3.5-Inch or 5.25-Inch Disc

If your software is on 3.5-inch microfloppy or 5.25-inch minifloppy, use the following procedure to boot the Exerciser system. You need to know the select code (an octal number) of the 12009A HP-IB interface card to which the disc drive is connected, and the HP-IB address to which the drive address switch is set.

1. Turn power ON.
2. Insert the disc in the drive (either, if there are two).
3. Press BREAK to get the VCP prompt:

```
VCP>
```

4. Enter the following:

```
VCP> %BDCffbuse
```

**%BDC** means boot from disc; enter as shown, in upper or lower case. Leave no embedded blanks; use BACKSPACE to correct errors.

**ffbuse** is a string of octal digits; leading zeros can be omitted. Leave no blanks.

**ff** = media file number: zero for ASIC or MUX Exerciser software on minifloppy or microfloppy.

**b** = HP-IB address (0-7) of disc drive from which you want to boot.

**u** = disc drive unit number:

0 for single drive or left drive

1 for right drive

**sc** = select code (octal) of the 12009A HP-IB interface card to which the disc drive is connected.

5. Press RETURN.

For example, to boot from the left side of a dual minifloppy drive set to HP-IB address 2 with the HP-IB interface card set to select code 27:

```
VCP> %bdc2027
```

The Exerciser will begin execution, asking you for the LU number of the tape drive to be tested. For the memory-based Exerciser, this LU number is 7.

## Booting from 8-Inch Flexible Disc

If your software is on an 8-inch flexible disc, use the following procedure to boot the Exerciser system. You need to know the select code of the 12009A HP-IB card to which the disc drive is connected, and the HP-IB address to which the drive address switch is set. You will be choosing the file to be booted according to whether the VCP terminal is ASIC or MUX interfaced.

1. Turn power ON.
2. Insert the disc in either drive.
3. Press BREAK to get the VCP prompt:

```
VCP>
```

4. Enter the following:

```
VCP> %BDCbuscFILENAME
```

**%BDC** means boot from disc; enter as shown, in upper or lower case.  
Leave no embedded blanks; use BACKSPACE to correct errors.

**busc** is a string of octal digits; leading zeros can be omitted. Leave no blanks.

**b** = HP-IB address (0-7) of disc drive from which you want to boot.

**u** = disc drive unit number:

0 for single drive or left drive

1 for right drive

**sc** = select code (octal) of the 12009A HP-IB interface card to which the disc drive is connected.

**FILENAME** is the name of the Exerciser system to be loaded.

**MTEXR** for VCP terminals ASIC interfaced.

**MTEXRM** for VCP terminals MUX interfaced.

5. Press RETURN.

For example, using an ASIC-interfaced VCP terminal to boot from the left side of a dual flexible disc drive set to HP-IB address 2, with the HP-IB interface card set to select code 27:

```
VCP> %bdc2027MTEXR
```

The Exerciser will begin execution, asking you for the LU number of the tape drive to be tested. For the memory-based Exerciser, this LU number is 7.

## Booting from Mini-Cartridge Tape

If your software is on mini-cartridge tape, use the following procedure to boot the Exerciser system. You need to know the select code of the 12005A ASIC card to which the terminal with the tape drives is connected. The left drive is unit 0 and the right drive is unit 1.

1. Turn power ON.
2. Insert cartridge Number 1 in either drive.
3. Press BREAK to get the VCP prompt:

VCP>

4. Enter the following:

VCP> %LCTffbusc

**%LCT** means load from mini-cartridge tape but do not start the system.  
Enter as shown, use upper or lower case letters.  
Leave no embedded blanks; use BACKSPACE to correct errors.

**ffbusc** is a string of octal digits in which leading zeros can be omitted.  
Leave no blanks.

**ff** = media file number; zero for Exerciser software on mini-cartridge.

**b** = zero for mini-cartridge tape.

**u** = tape drive unit number:

0 for left drive

1 for right drive

**sc** = select code (octal) of the interface to the terminal with the mini-cartridge tape drives.

5. Press RETURN. The first tape will load.
6. When the first tape has loaded, the VCP prompt will appear. Remove the first tape, insert the second, then enter the following:

VCP> %BCTffbusc

**%BCT** means boot from mini-cartridge tape and start the system.

**ffbusc** is the same string as you used in step 3, if you use the same tape drive.

For example, to boot from the left drive of a terminal that is on select code 20:

1. Insert first tape, then enter:

```
VCP> %LCT20
```

2. Change tapes, then enter:

```
VCP> %BCT20
```

If you were to put the second tape in the right drive, you would use the bootstring %BCT120.

After the second tape has loaded, the Exerciser starts execution by asking you for the LU number of the tape drive to be tested. For the memory-based Exerciser, this LU number is 7.

### Booting from CS/80 Cartridge Tape

If your software is on a CS/80 Cartridge, use the following procedure to boot the Exerciser system. You need to know the select code of the 12009A HP-IB card to which the CS/80 drive is connected, and the HP-IB address to which the drive address switch is set. You will be choosing the file to be booted according to whether the VCP terminal is ASIC or MUX interfaced.

1. Turn power ON.
2. Insert the tape cartridge in the drive.
3. Press BREAK to get the VCP prompt:

```
VCP>
```

4. Enter the following:

```
VCP> %BDCffbusc
```

**%BDC** means boot from CTD; enter as shown, in upper or lower case. Leave no embedded blanks; use BACKSPACE to correct errors.

**ffbusc** is a string of octal digits in which leading zeros can be omitted. Leave no blanks.

ff = file number:

octal 14 if the VCP terminal is ASIC interfaced,  
octal 34 if the terminal is on the MUX.

b = HP-IB address (0-7) of the CS/80 drive.

u = CS/80 drive unit number: 1 for CTD.

sc = select code (octal) of the 12009A HP-IB interface card to which the CS/80 drive is connected.

For example, to boot the ASIC Exerciser system from a CTD at HP-IB address 2, select code 27:

```
VCP> %BDC142127
```

The Exerciser will begin execution, asking you for the LU number of the tape drive to be tested. For the memory-based Exerciser, this LU number is 7.

The Exerciser bootable systems are also on CS/80 Primary System cartridges. If you do not have the 24398B software, but you do have the RTE-A Primary on CS/80 cartridge (and the drive to read it), you can boot the Exerciser by using the same procedure as that given above, except that the file numbers are different. On the Primary System, the ASIC Exerciser is octal file number 30; the MUX version is octal 50.



## Operation

---

The Exerciser is menu driven in order to deliver maximum diagnostic results while requiring minimum knowledge on your part of the Exerciser itself. The Exerciser asks for the information it needs, and requests operator intervention when assistance is needed, such as mounting a tape.

### Main Menu

After you have given the LU number of the tape drive to be tested, as described at the end of each boot procedure in Chapter 1, the exerciser verifies the drive type, then displays the following warning and main menu:

---

#### NOTE

Some of these options are destructive to tape contents and require a SCRATCH tape.

---

#### **\*\* HP-7978 Exerciser \*\***

- 1 Test All
- 2 Clear
- 3 Identify
- 4 Loopback
- 5 Power-On Self-Test
- 6 Status
- 7 Internal Device Error Logs
- 20 Selectable Self-Tests
- 30 Selectable Tape Movement Commands
- 40 Selectable Tape Write Commands

- 45 Selectable Tape Read Commands
- 50 Service Utilities
  
- 0 Exit the Exerciser

Enter the desired option number:

Select one of the options by number, press RETURN, then the Exerciser will proceed to execute that option. Within the option, there may be another menu to select particular functions.

Note that you can always select 0 to exit. Enter 0 in any option menu to return to the main menu. Enter 0 in the main menu to exit the Exerciser.

## Options

There are twelve Exerciser options selectable from the main menu. Error messages displayed during the execution of an option will, in some cases, list a possible offending Field Replaceable Unit (FRU). If the option finds more than one possible offending FRU, the candidates will be listed in order, with the most probable offender first.

### Test All (Option 1)

Mount a scratch tape on the drive before running this option on the 7974. The 7974 makes no distinction between online and offline status during diagnostics, so it is advisable to mount a scratch tape at the beginning of the test.

Test All (Option 1) is designed to be run first, executing a fairly thorough set of drive diagnostics. The approximate run time for a pass condition is two minutes for the 7978 and up to eight minutes for the 7974. After locating the general area where the failure has occurred, use the other options to isolate the exact cause of the problem.

First, the loopback test executes (as described in Option 4); second, the power-on self-test (Option 5) executes; finally, the option executes a battery of the drive's built-in self-tests.

## **Clear (Option 2)**

Clear (Option 2) puts the drive into a known state:

- Restarts drive protocol.
- Purges internal command and report queues.
- Clears data buffer.

Tape position and online/offline status are not affected.

This option does not test the drive's responses to the above actions. Use other options (identify, loopback, status) to verify these responses.

## **Identify (Option 3)**

Identify (Option 3) checks the drive's identity and prints an error message if the drive fails to respond or is of an incorrect type. Identify is run automatically when the Exerciser is initiated.

## **Loopback (Option 4)**

Loopback (Option 4) tests the HP-IB communication link between the host and the drive. The following units are tested:

- HP-IB (ABI) chip
- HP-IB bus transceivers
- Data buffer
- Handshake logic
- Buffer logic

A test data pattern is sent to the drive (write loopback) and then returned from the drive (read loopback). If the drive finishes the write loopback and the read loopback, the sent bytes are compared to the returned bytes. Three separate types of error message can be generated:

1. Write loopback failed.
2. Write and read loopback failed (sent bytes were different from returned bytes).
3. Drive timed out on request.

In each case, the potential offending FRUs are listed in order of probability.

## Power-On Self-Test (Option 5)

Power-On Self-Test (Option 5) executes a test similar to the test executed whenever the drive is powered on (Self-Test Number 5, Appendix C). This test, in turn, calls selected other self-tests.

For the 7978, this option must be run while the drive is offline (a reminder message is issued). Once again, the 7974 can execute this option while the drive is either online or offline. The option requires approximately 30 seconds for the pass condition.

## Status (Option 6)

Status (Option 6) displays the status (contained in six status bytes) of the drive. The following hardware is tested:

- HP-IB Circuitry
- Master Controller

Status is not evaluated as good or bad, but is merely displayed. You are given three options in selecting the form of output displayed:

1. Show the status bytes in their binary form.
2. Show the messages associated with each bit set in the status bytes (decode the bytes).
3. Show both representations.

An example of the binary display is:

BYTE	DIO LINES							
	8	7	6	5	4	3	2	1
1	0	0	0	0	0	0	1	0
2	1	0	0	0	0	0	0	1
3	0	0	0	0	0	0	0	0
4	0	0	0	0	0	1	1	1
5	0	0	1	0	1	0	0	1
6	0	0	0	0	0	0	1	0

Each of the above rows contains one of the status bytes (decoded into binary form). The message form displays the corresponding message for each of the set bits in the status bytes. For example, the following message display corresponds to the bit pattern above.

- Status byte number 1:  
     DIO line 2: Unrecoverable Data or  
                 Format Error- See Byte 5
- Status byte number 2:  
     DIO line 8: In GCR (6250 BPI) Mode  
     DIO line 1: Immediate Response Mode
- Status byte number 3: Is All Zeros
- Status byte number 4:  
     retry count: 7
- Status byte number 5: Tape Velocity Was Out of Specification
- Status byte number 6: 2 Commands Issued Since Failure

For a complete listing of the messages generated for each status byte, see Appendix A.

### Internal Device Error Logs (Option 7)

Internal Device Error Logs (Option 7) allows you to examine the contents of two different error logs. The menu is as follows:

- 14 Read Internal Bus Error Log
- 15 Read Tape Log
- 16 Decode Self-Test Status
- 0 Return to Main Menu

### Read Internal Bus Error Log (Option 14)

The Internal Bus Error Log (Option 14) contains the ten most recent diagnostic error messages. The format is:

TIME (Hr:Min:Sec.mSec)	DIAGNOSTIC ERROR MESSAGE (Hex)
0002:34:21.1203	F5A
0002:57:56.458	D459
.	.

**TIME** is when the error occurred relative to power-on. Use Option 16 to get an explanation of the Hex codes.

## Read Tape Log (Option 15)

The Tape Log (Option 15) details error occurrences for the last twenty tapes. The format is:

TAPE	TIME FROM POWER-ON	HARD ERROR COUNT	SOFT ERROR COUNT	COMMANDS PROCESSED
1	0002:01:36.968	4	18	4643
2	0004:46:21.412	0	2	2711
3	0007:12:47.452	1	9	1634
.	.	.	.	.
.	.	.	.	.
.	.	.	.	.

The hard error count is the number of data blocks the drive was unable to read or write. The soft error count is the number of data blocks successfully retried by the drive. Commands processed is the number of commands executed since the tape was loaded.

## Decode Self-Test Status (Option 16)

Decode Self-Test Status (Option 16) decodes the four-character hexadecimal self-test error codes. When self-tests are executed in Option 20, the error codes are decoded into messages at the time of occurrence. These errors are stored in the internal bus error log (Option 14). Option 14 reports only the hexadecimal code for the error; Option 16 asks you to input this code, then explains it to you.

## Selectable Self-Tests (Option 20)

Selectable Self-Tests (Option 20) allows you to execute predefined sets of the drive's diagnostic self-tests.

The 7974 menu is:

### Option 20 - Selectable Self-Tests

- 31 Master Controller Tests
- 32 Transport Tests
- 33 Transport Servo/Capstan
- 34 Error Detection Circuitry
- 35 Loop Write/Read Tests
- 36 Write/Backspace/Read Tests
- 37 Stop/Start Write Tests
- 38 Streaming Write Tests

- 42 Run a Specific Self-Test
- 43 Self-Test Listing
  
- 0 Return to Main Menu

The 7978 menu is:

**Option 20 - Selectable Self-Tests**

- 31 Master Controller Tests
- 32 HP-IB Internal Loopback Tests
- 33 Internal Digital Loopback Tests
- 34 Servo Controller Tests (offline only)
- 35 Write-Clock Tests
- 40 Write PE Data Block Tests (online only)
- 41 Write GCR Data Block Tests (online only)
- 42 Run a Specific Self-Test
- 43 Self-Test Listing
  
- 0 Return to Main Menu

Option 42 allows you to run any one specific self-test.

Option 43 displays a complete list of self-tests for the drive being tested. A brief explanation of the test (similar to Appendix C) is provided for each test. As explained in the load instructions, Option 43 schedules a program (MEXPL) to print the list.

If you are running the Exerciser by loading and running the relocatable copy of MTEXR, you will get an error message if you attempt to execute Option 43 without first RPinG MEXPL. You will then be allowed to exit MTEXR (in order to RP MEXPL) or to proceed without the availability of this option.

Each of the other options executes one or more of the drives' diagnostic self-tests. Appendix B contains a comprehensive list of the options and which self-tests they execute.

Some of the self-tests require a mounted scratch tape. If a tape is not already mounted, you are prompted to do so. As a test is being executed, its number is displayed on the screen. The status of a test (pass or fail) is displayed after the test has completed. In the event of a failure, the diagnostic error code is decoded and messages isolating the problem to a single FRU are displayed. In addition, you are allowed to retrieve the drive's status at this time.

## Tape Movement Commands (Option 30)

Tape Movement Commands (Option 30) allows you to move the tape in any of the standard ways. If a tape is not mounted and online, you are prompted to mount a written (and preferably scratch) tape, then the following menu is displayed:

- 56 Forward Space One File
- 57 Back Space One File
- 58 Forward Space One Record
- 59 Back Space One Record
- 60 Rewind
  
- 0 Return to Main Menu

Status is returned after each command if an error occurred.

Note that forward-space record and back-space record commands will not always cause the tape to move. The first such command allows the drive to store several records into an internal buffer. Thus, additional similar requests can be handled without tape movement. The tape will be moved again when the buffer is exhausted or when a different type of command is issued.

Backward tape movements initiated when the tape is already at the load point (BOT) will finish immediately without action. Attempts to advance the tape past the last written record will be treated as errors (status will be returned).

## Tape Write Commands (Option 40)

Tape Write Commands (Option 40) allows you to execute various writing operations. If a tape is already mounted (but not at the load point), it is rewound to BOT. Otherwise, you are prompted to put the drive online and mount a write-enabled scratch tape.

---

### NOTE

**This option is destructive to the current contents of the tape. Thus, if a tape with good data is mounted, remove it before executing this option and replace it with a scratch tape.**

---

With a write-enabled tape mounted, you are prompted for a density selection. Note that the 7978 supports the GCR (6250 bpi) and PE (1600 bpi) modes while the 7974 supports the PE (1600 bpi) mode and, optionally, the NRZI (800 bpi) mode. It is possible, however, to specify NRZI mode on a non-NRZI drive. The Exerciser cannot detect the error until the first write is attempted. At that time, the error will be flagged.



After density selection, the Exerciser displays the following menu:

- 83 Write a File – Long Records
- 84 Write a File – Short Records
- 85 Write a File Mark
- 86 Write a Record Gap
  
- 0 Return to Main Menu

The Exerciser generates random data for the write file operations. Short records are defined as being 500 bytes in length. Long records are 16K (16,384) bytes in length. In either case, a file contains fifty records. Status is checked after each record is written. If an error has occurred, status will be displayed and the command will be aborted.

### **Tape Read Commands (Option 45)**

Tape Read Commands (Option 45) allows you to read data from a tape. If a tape is already mounted (but not at the load point), it is rewound to BOT; otherwise, you are prompted to mount a previously-written tape (any tape with some files on it will do) and to put the drive ONLINE. After this is accomplished, you are prompted to either issue a read file command or to terminate the option.

Status is checked after each record is read; a message is printed if an error occurred. If the mounted tape's density is not supported by the drive, an error is detected when the first read operation is attempted.

### **Service Utilities (Option 50)**

Service Utilities (Option 50) allows you to get more details about the drive's internal status. The menu is:

- 106 Read HP-IB Address
- 107 Read Amount of Tape Across Head
- 108 Read Master Controller Firmware Revision
- 111 Display Internal Status Log
  
- 0 Return to Main Menu

Option 111 allows you to examine the entire internal status log. This log is large: 2062 words in length. You are allowed to specify any starting address (in increments of 100). Two hundred words are displayed on the screen in hex format. You can step through the log by typing RETURN, or exit by typing 0 (zero). If you are running the disc-based version of the Exerciser, you can specify a second device (typically a printer) to dump the log to.

## Status Registers

---

### Status Register 1

#### DIO Lines

- 8 = End-of-File (EOF) Detected
- 7 = At Load Point
- 6 = Beyond the End-of-Tape (EOT)
- 5 = Error Correction or Retries Have Occurred
- 4 = Command Rejected-See Byte 4
- 3 = Loaded Tape is Write Protected
- 2 = Unrecoverable Data or Format Error-See Byte 5
- 1 = Online

### Status Register 2

#### DIO Lines

- 8 = In GCR (6250 BPI) Mode
- 7 = Unknown Density on Tape
- 6 = Data Parity Error
- 5 = Data Error (Timing)
- 4 = Tape Runaway
- 3 = Door is Open (7978 only)
- 2 = Reserved
- 1 = Immediate Response Mode

## Status Register 3

### DIO Lines

- 8 = In PE (1600 BPI) Mode
- 7 = In NRZI (800 BPI) Mode
- 6 = Power Has Been Restored
- 5 = HP-IB Command Parity Error
- 4 = Tape Position is Unknown (Unrecovered)
- 3 = Tape Drive Formatter Error-See Byte 5
- 2 = Tape Drive Servo Error-See Byte 5
- 1 = Tape Drive Controller Error-See Byte 5

## Status Register 4

### DIO Lines

- 1-5 = Retry Count
- 6-8 = Command Rejected Error Detail
  - 0 = No Further Detail
  - 1 = No Further Detail
  - 2 = Device Reject-See Byte 5
  - 3 = Protocol Reject-See Byte 5
  - 4 = No Further Detail
  - 5 = Prior Error Reject-See Byte 5
  - 6 = No Further Detail
  - 7 = Self-Test Failure

## Status Register 5

This byte contains binary coded information regarding the specific error encountered.

## Status Register 6

This byte is used only with transparent status messages of soft and hard errors in immediate response mode. It contains the number of commands pending at the time of the error.

## Option 20 Self-test Calls

---

### HP 7974 Self-Tests

Option	Description	Self-Tests Called
31	Master Controller Tests	6,8,9,10,11,19
32	Transport Tests	101
33	Transport Servo/Capstan	110,104,105,106, 123,130,109,105, 106,123,130
34	Error Detection Circuitry	107,110,124
35	Loop Write/Read Tests	108
36	Write/Backspace/Read Tests	109,117,110,117
37	Stop/Start Write Tests	110,114,118,119, 109,114,119
38	Streaming Write Tests	110,114,120,121, 109,114,120,121

### HP 7978 Self-Tests

Option	Description	Self-Tests Called
31	Master Controller Tests	6,8,9,10,11,19
32	HP-IB Internal Loopback Tests	13,14
33	Internal Digital Loopback Tests	15
34	Servo Controller Tests	41,43
35	Write-Clock Tests	12
40	Write PE Data Block Tests	21
41	Write GCR Data Block Tests	22



# Self-Tests

---

## HP 7974 Self-Tests

#	Access	Test
0	L	Display Most Recent Error Code
1	L	Display Error Log
2	LR	Clear Error Log
5	LR	MC Power-on Self-Test
6	LR	Kernal MC Tests
7	LR	Front Panel Display
8	LR	Walking RAM Tests
9	LR	Timer Tests
10	LR	EEPROM Read Test
11	LR	Data Buffer Tests
13	LR	HP-IB Internal Loopback
14	LR	HP-IB DB Loopback
19	LR	EEPROM Write Test
20	L	Front Panel Confidence Test
25	L	Set to Single Looping
26	L	Set to Infinite Looping
27	L	Display MC Revision
28	L	Display Tape Odometer
29	L	Display Densities Supported
30	L	Local Firmware Update
100	LR	Drive Interface Test
101	LR	Automatic Program Sequencer
103	LR	Data Channel Present
104	LR	Servo Test
105	LR	Capstan Test
106	LR	Fwd/Rev Speed Check
107	LR	Test Error Detection Circuitry
108	LR	Write/Read Test
109	LR	Select High Speed
110	LR	Select Low Speed
113	LR	Select Data Pattern 1

114	LR	Select Random Data Pattern
117	LR	Write/Backspace/Read Data Check
118	LR	Write Short Records (start/stop)
119	LR	Write Long Records (start/stop)
120	LR	Write Short Records (streaming)
121	LR	Write Long Records (streaming)
123	LR	Repositioning Ramps Test
124	LR	Test Error Detection Circuitry (Data to Tape)
126	LR	Clear Sense Byte Registers
127	LR	NRZI Select
128	LR	PE Select
130	LR	Rewind
210	LR	Recompute Checksums

Access Codes:

L = Local (Front Panel)  
R = Remote (Host via HP-IB)

MC = Master Controller

## HP 7978 Self-Tests

#	Access	Test
0	L	Display Most Recent Error Code
1	L	Display Error Log
2	LR	Clear Error Log
3	L	Power-On Self-Test Failure Override
4	LR,Of	Power-On Self-Test
5	LR,Of	MC Power-On Self-Test
6	LR	Kernal MC Tests
7	LR	Front Panel Display
8	LR	Walking RAM Tests
9	LR	Timer Tests
10	LR	EEPROM Read Test
11	LR	Data Buffer Tests
12	LR	Write Clock Test
13	LR	HP-IB Internal Loopback
14	LR	HP-IB DB Loopback

15	LR	Digital Loopback
16	LR	Read Board Present Test
19	LR	EEPROM Write Test
20	L	Front Panel Confidence Test
21	LR,On	Write PE Data Block
22	LR,On	Write GCR Data Block
24	L	Auto Gain Value Update
25	L	Set to Single Looping
26	L	Set to Infinite Looping
27	L	Display MC Revision
28	L	Display Tape Odometer
29	L	Display Densities Supported
30	L	Local Firmware Update
31	LR	Set Write Test Reposition
32	LR	Set Write Test to Walk
33	LR,On	Read PE Data Block
34	LR,On	Read GCR Data Block
35	L	BOT-EOT Erase Test
36	L	BOT-EOT PE Write Test
37	L	BOT-EOT GCR Write Test
38	L	BOT-EOT PE Read Test
39	L	BOT-EOT GCR Read Test
40	L	Worst Case Servo Reposition
41	LR,Of	SC-MC Handshake
42	LR,Of	SC Power-On Test
43	LR,Of	SC Board Test
44	LR,Of	SC Gap Interrupt Test
45	L	SC Buffer Arm Interactive Test
46	L	SC Speed Encoder Interactive Test
48	L	Display SC Revision
49	LR,Of	SC Sensor Test
50	LR,Of	SC Connector Test
51	LR,Of	SC Shutdown Test
52	LR,Of	SC Comparator Test
53	LR,Of	SC-DAC Test
54	LR,Of	SC State Machine Test
55	LR,Of	SC Interrupt Test
56	L	SC BOT-EOT Sensor Test
57	LR,Of	SC Power-On Tests
58	L	SC Partial Interactive Test
59	L	SC Scope Interactive Test

Access Codes:

L = Local (Front Panel)  
R = Remote (Host via HP-IB)  
On = On-line Only  
Off = Off-line Only

MC = Master Controller  
SC = Servo Controller



# READER COMMENT SHEET

HP 1000 Computers

HP 7974/7978 Magnetic Tape Drive  
HP 1000 Exerciser Manual

5958-9137 January, 1986

We welcome your evaluation of this manual. Your comments and suggestions help us to improve our publications. Please explain your answers under comments, below, and use additional pages if necessary.

Is this manual technically accurate?

YES  NO

Are the concepts and wording easy to understand?

YES  NO

Is the format of this manual convenient in size, arrangement, and readability?

YES  NO

Comments:

This form requires no postage stamp if mailed in the U.S. For locations outside the U.S., your local HP representative will ensure that your comments are forwarded.

FROM: \_\_\_\_\_

Date \_\_\_\_\_

Name \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

FOLD

FOLD



NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES

---


**BUSINESS REPLY MAIL**

FIRST CLASS PERMIT NO. 0141 CUPERTINO, CA

---

POSTAGE WILL BE PAID BY ADDRESSEE

Publications Manager  
Hewlett-Packard Company  
Data Systems Division  
11000 Wolfe Road  
Cupertino, CA 95014-9974

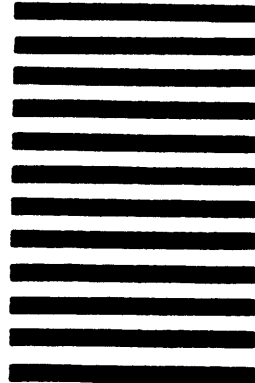

FOLD

FOLD

Manual Part No. 5958-9137  
Printed in U.S.A. January, 1986  
E0186

