



Quick Installation Guide

3M Console Switch Cable (PS/2)

About the PS/2 switch cable

Use the PS/2[®] switch cable to convert keyboard, monitor, and mouse signals from a server through a single CAT 5 cable (up to 32.8 feet or 10 meters) to the console switch.

The switch cable is powered from the server and provides Keep Alive functionality even if the console switch is not turned on. Keep Alive functionality enables the server to operate correctly with or without connectivity to the console switch.

Troubleshooting tip

Make sure that the server is turned on before operating the console switch. If a server is unavailable through the OSCAR[®] interface, check the cable connections or test another switch cable in its place.

1 Turning off the device

Turn off the device that you want to connect to the console switch through the switch cable.


2 Connecting the switch cable to the console switch

Choose an available ARI port (labeled 1-8 or 1-16) on the rear of the console switch. Connect the RJ-45 connector on the switch cable to the ARI port.

3 Connecting a device to the switch cable

Connect the monitor, keyboard, and mouse ports on the other end of the switch cable into the server or a compatible switch.

Connecting the switch cable

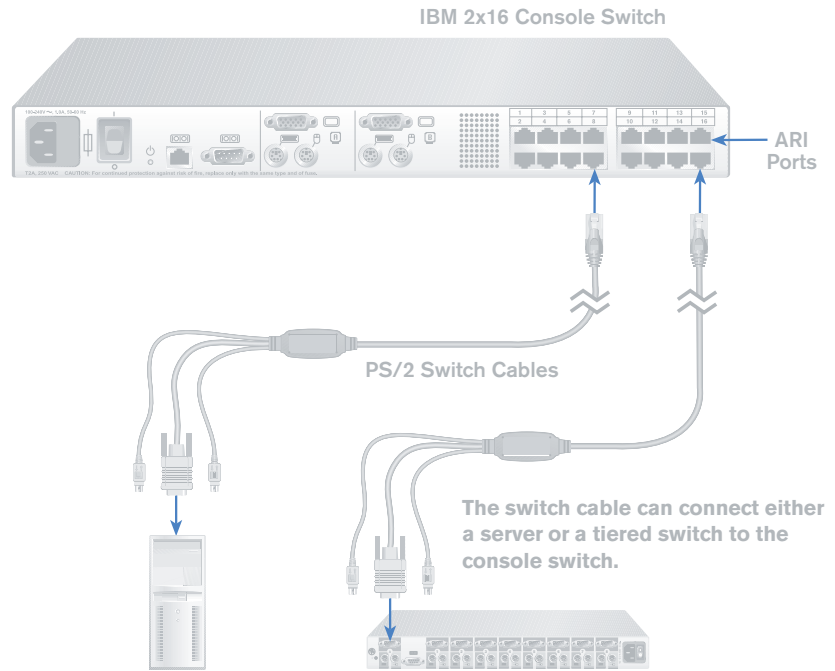

4 Turning on the device

Turn on the device that you connected to the console switch through the switch cable.

For more information

For more information, see the *IBM Console Switch Installation and User's Guide* that comes with the console switch. See <http://www.ibm.com/pc/support> for the latest software and firmware updates.